

# Castle Point Borough Council Level 2 Strategic Flood Risk Assessment

Castle Point Borough Council

Project number: 60725540

January 2026

## Quality information

Prepared by	Checked by	Verified by	Approved by
Becci Ward Consultant	Jo Somerton Principal Consultant	Richard Moore Associate	Richard Moore Project Manager
		Sarah Littlewood Associate	

## Revision History

Revision	Revision date	Details	Authorized	Name	Position
P01	15/04/2025	Draft for Stakeholder Review	RM	Richard Moore	Project Manager
P02	27/05/2025	Final	RM	Richard Moore	Project Manager
P03	02/12/2025	Final – minor updates to include latest EA data and ECC comments	RM	Richard Moore	Project Manager
P04	16/01/2026	Final – minor updates following ECC comments	RM	Richard Moore	Project Manager

**Prepared for:**

Castle Point Borough Council

**Prepared by:**

AECOM Limited  
Midpoint, Alencon Link  
Basingstoke  
Hampshire RG21 7PP  
United Kingdom

T: +44 (0)1256 310200  
[acom.com](http://acom.com)

© 2026 AECOM Limited. All Rights Reserved.

AECOM Limited ("AECOM") has prepared this report for the sole use of ("Client") in accordance with the terms and conditions of appointment (ref no: 60725540) dated 17/01/2024 ("the Appointment").

AECOM shall have no duty, responsibility and/or liability to any party in connection with this report howsoever arising other than that arising to the Client under the Appointment. Save as provided in the Appointment, no warranty, expressed or implied, is made as to the professional advice included in this report or any other services provided by AECOM.

This report should not be reproduced in whole or in part or disclosed to any third parties for any use whatsoever without the express written authority of AECOM. To the extent this report is reproduced in whole or in part or disclosed to any third parties (whether by AECOM or another party) for any use whatsoever, and whether such disclosure occurs with or without the express written authority of AECOM, AECOM does not accept that the third party is entitled to rely upon this report and does not accept any responsibility or liability to the third party. To the extent any liability does arise to a third party, such liability shall be subject to any limitations included within the Appointment, a copy of which is available on request to AECOM.

Where any conclusions and recommendations contained in this report are based upon information provided by the Client and/or third parties, it has been assumed that all relevant information has been provided by the Client and/or third parties and that such information is accurate. Any such information obtained by AECOM has not been independently verified by AECOM, unless otherwise stated in this report. AECOM accepts no liability for any inaccurate conclusions, assumptions or actions taken resulting from any inaccurate information supplied to AECOM from the Client and/or third parties.

## Table of Contents

1.	Introduction.....	1
1.1	Project Background .....	1
1.2	Level 1 SFRA.....	2
1.3	Level 2 SFRA.....	3
1.4	Report Structure .....	4
1.5	Future Updates .....	5
2.	Datasets .....	6
2.1	Overview.....	6
2.2	Flood Zone Data .....	6
2.3	River Modelling Outputs.....	6
2.4	Tidal Modelling Outputs .....	7
2.5	Risk of Flooding from Surface Water .....	9
2.6	Groundwater Flooding .....	10
2.7	Reservoir Flooding.....	10
2.8	Historic Flood Records.....	11
3.	Level 2 SFRA Site Assessments .....	12
3.1	Overview.....	12
3.2	Site Assessment Proforma Template .....	20
3.3	Summary of Sites in Flood Zone 1.....	21
4.	Summary of Recommendations .....	24
	Appendix A Site Proformas.....	26
	Appendix B Surface Water Mapping .....	27

## Tables

Table 1-1: Flood Zones Definitions (PPG Flood Risk and Coastal Change Table 1).....	2
Table 1-2: Flood risk vulnerability and Flood Zone 'incompatibility' (PPG Table 2).....	4
Table 2-1: Peak River Flow Allowances for management catchments in Castle Point (based on a 1981 to 2000 baseline) .....	7
Table 2-2: Flood Hazard Categories.....	8
Table 2-3: Peak Rainfall Intensity Allowances for management catchments in Castle Point.....	9
Table 3-1: Summary of flood risk issues and constraints .....	13
Table 3-2: Datasets and information used for Level 2 Site Assessment Proformas .....	20
Table 3-3: Summary of Surface Water and Groundwater Flood Risk to sites in Flood Zone 1.....	22

# 1. Introduction

## 1.1 Project Background

- 1.1.1 “Flood risk” is a combination of the probability and the potential consequences of flooding. Areas at risk of flooding are those at risk from any source of flooding, now or in the future. Sources include rivers and the sea, direct rainfall on the ground surface, rising groundwater, overwhelmed sewers and drainage systems, reservoirs, canals and lakes and other artificial sources. Flood risk also accounts for the interactions between these different sources.
- 1.1.2 The National Planning Policy Framework<sup>1</sup> (NPPF) and associated Planning Practice Guidance (PPG) for Flood Risk and Coastal Change<sup>2</sup> set out the active role Local Planning Authorities (LPAs) should take to ensure that flood risk is understood and managed effectively and sustainably throughout all stages of the planning process. The NPPF outlines that Local Plans should be supported by a Strategic Flood Risk Assessment (SFRA) and LPAs should use the findings to inform strategic land use planning.
- 1.1.3 The overall approach of the NPPF to flood risk is broadly summarised in Paragraph 170:
- “Inappropriate development in areas at risk of flooding should be avoided by directing development away from areas at highest risk (whether existing or future). Where development is necessary in such areas, the development should be made safe for its lifetime without increasing flood risk elsewhere”.*
- 1.1.4 NPPF Paragraph 181 states:
- “When determining any planning applications, local planning authorities should ensure that flood risk is not increased elsewhere. Where appropriate, applications should be supported by a site-specific flood-risk assessment. Development should only be allowed in areas at risk of flooding where, in the light of this assessment (and the sequential and exception tests, as applicable) it can be demonstrated that:*
- a) within the site, the most vulnerable development is located in areas of lowest flood risk, unless there are overriding reasons to prefer a different location;*
  - b) the development is appropriately flood resistant and resilient such that, in the event of a flood, it could be quickly brought back into use without significant refurbishment;*
  - c) it incorporates sustainable drainage systems, unless there is clear evidence that this would be inappropriate;*
  - d) any residual risk can be safely managed; and*
  - e) safe access and escape routes are included where appropriate, as part of an agreed emergency plan”.*
- 1.1.5 Castle Point Borough Council (CPBC) is preparing a New Local Plan (Castle Point Plan) which contains the overall vision and framework for future development in the area, addressing needs and opportunities in relation to housing, the economy, community facilities and infrastructure, as well as providing a basis for conserving and enhancing the natural and historic environment, mitigating and adapting to climate change, and achieving well designed places. The emerging Castle Point Plan will set out planning policies and proposals for how communities and places in the Borough will develop up to 2043.
- 1.1.6 AECOM produced a **Level 1 SFRA** for CPBC, which was finalised in February 2025<sup>3</sup>, as described in Section 1.2, and have since been commissioned by CPBC to prepare a **Level 2 SFRA** to inform the ongoing preparation of the emerging Castle Point Plan. This report and associated appendices form the **Level 2 SFRA** for CPBC.

<sup>1</sup> Department for Levelling Up, Housing and Communities. Updated February 2025. *National Planning Policy Framework*. <https://www.gov.uk/government/publications/national-planning-policy-framework--2>

<sup>2</sup> Department for Levelling Up, Housing and Communities. Ministry of Housing, Communities and Local Government. Updated August 2022. *Planning Practice Guidance: Flood Risk and Coastal Change*. <https://www.gov.uk/guidance/flood-risk-and-coastal-change>

<sup>3</sup> AECOM, February 2025, Castle Point Borough Council Level 1 SFRA.

## 1.2 Level 1 SFRA

- 1.2.1 The purpose of a **Level 1 SFRA** is to collate and analyse the most up to date readily available flood risk information for all sources of flooding and provide an overview of flood risk issues across the Borough. The **Level 1 SFRA** considers the risk of flooding now and in the future as a result of climate change.
- 1.2.2 In order to assess the risk of flooding from rivers (and the sea), the NPPF uses Flood Zones, which describe the risk of flooding from low to high probability. Table 1 in the PPG (Flood Risk and Coastal Change) defines the Flood Zones, and this is reproduced in Table 1-1.

**Table 1-1: Flood Zones Definitions (PPG Flood Risk and Coastal Change Table 1)**

Flood Zone	Definition	Probability of Flooding
Flood Zone 1	Land having a less than 0.1% annual probability of river or sea flooding. Shown as clear on the Flood Map – all land outside Flood Zones 2 and 3.	Low
Flood Zone 2	Land having between a 1% and 0.1% annual probability of river flooding; or land having between a 0.5% and 0.1% annual probability of sea flooding. Shown as light blue on the Flood Map.	Medium
Flood Zone 3a	Land having a 1% or greater annual probability of river flooding; or land having a 0.5% or greater annual probability of sea flooding. Shown as dark blue on the Flood Map.	High
Flood Zone 3b	Land where water from rivers or the sea has to flow or be stored in times of flood. The identification of functional floodplain should take account of local circumstances and not be defined solely on rigid probability parameters. Functional floodplain will normally comprise: <ul style="list-style-type: none"><li>• Land having a 3.3% annual probability of flooding, with existing flood risk management features and structures operating effectively,</li><li>• Land that is designed to flood (such as a flood attenuation scheme), even if it would only flood in more extreme events (such as 0.1% annual probability of flooding).</li></ul> LPA should define Flood Zone 3b within their SFRA in agreement with the Environment Agency. It is not separately distinguished from Flood Zone 3a on the Flood Map for Planning (Rivers and Sea).	Functional Floodplain

- 1.2.3 The **Level 1 SFRA** Report provides guidance on:
- The application of the Sequential Test when allocating future development sites to inform the Local Plan, as well as by developers promoting development on windfall sites. The Sequential Test is the decision-making process whereby future development is steered towards areas of lowest flood risk.
  - Managing and mitigating flood risk, the application of sustainable drainage systems (SuDS), and the preparation of site-specific Flood Risk Assessments (FRAs).
  - Potential flood risk management objectives and policy considerations which may be developed and adopted by the LPA as formal policies within their emerging Local Plan.

## 1.3 Level 2 SFRA

1.3.1 The Environment Agency guidance 'How to prepare a strategic flood risk assessment'<sup>4</sup> states that where a **Level 1 SFRA** shows that land outside areas at risk of flooding now or in the future cannot appropriately accommodate all the necessary development, it may be necessary to increase the scope of the assessment to a **Level 2 SFRA** to provide the information necessary for application of the Exception Test, where appropriate. A **Level 2 SFRA** should consider the detailed nature of the flood characteristics within a flood zone including, where possible:

- flood probability;
- flood depth;
- flood velocity;
- rate of onset of flooding; and
- duration of flood.

1.3.2 This more detailed information about the nature of flood risk in the Borough enables users to:

- apply the Sequential Test by identifying the severity and variation in risk *within* medium and high flood risk areas for all sources of flood risk;
- establish whether proposed site allocations or windfall sites, on which the emerging Castle Point Plan will rely, are capable of being made safe throughout their lifetime without increasing flood risk elsewhere; and
- begin to consider the application of the Exception Test, where relevant.

### Exception Test

1.3.3 Having applied the Sequential Test, if it is not possible for development to be located in areas with a lower risk of flooding (taking into account wider sustainable development objectives), the Exception Test may have to be applied. The purpose of the Exception Test is to ensure that, where it may be necessary to locate development in areas at risk of flooding, new development is only permitted if it can be demonstrated that:

- a) the development would provide wider sustainability benefits to the community that outweigh the flood risk; and
- b) the development will be safe for its lifetime taking account of the vulnerability of its users, without increasing flood risk elsewhere, and, where possible, will reduce flood risk overall.

1.3.4 Both elements of the Exception Test should be satisfied for development to be allocated or permitted.

1.3.5 Table 2 in the PPG Flood Risk and Coastal Change (reproduced in Table 1-2) identifies when the Exception Test is required with regards to Flood Zones. It is noted that some types of development are not permitted, regardless of the application of the Exception Test.

1.3.6 Full details of the vulnerability classifications for different types of development can be found in Table 2<sup>5</sup> of the PPG Flood Risk and Coastal Change. The table does not show the application of the Sequential Test which should be applied first to guide development to the lowest flood risk areas, nor does it reflect the need to avoid flood risk from sources other than rivers and the sea.

<sup>4</sup> Environment Agency, May 2024, *How to prepare a strategic flood risk assessment* <https://www.gov.uk/guidance/local-planning-authorities-strategic-flood-risk-assessment>

<sup>5</sup> Planning Practice Guidance (PPG) flood risk and coastal change. Table 2: Flood risk vulnerability and flood zone 'incompatibility' <https://www.gov.uk/guidance/flood-risk-and-coastal-change#table2>

**Table 1-2: Flood risk vulnerability and Flood Zone ‘incompatibility’ (PPG Table 2)**

Vulnerability Classification	Essential Infrastructure	Highly Vulnerable	More Vulnerable	Less Vulnerable	Water Compatible
Flood Zone	1	✓	✓	✓	✓
	2	✓	Exception Test Required	✓	✓
	3a	Exception Test Required <sup>a</sup>	✗	Exception Test Required	✓
	3b	Exception Test Required <sup>b</sup>	✗	✗	✓ <sup>b</sup>

✓ - Exception Test is not required ✗ - Development should not be permitted

<sup>a</sup> In Flood Zone 3a essential infrastructure should be designed and constructed to remain operational and safe in times of flood.

<sup>b</sup> In Flood Zone 3b (functional floodplain) essential infrastructure that has passed the Exception Test, and water-compatible uses, should be designed and constructed to:

- remain operational and safe for users in times of flood,
- result in no net loss of floodplain storage,
- not impede water flows and not increase flood risk elsewhere.

## 1.4 Report Structure

### Datasets and Consultation

1.4.1 To inform the development of the **Level 2 SFRA**, the flood risk datasets presented within the **Level 1 SFRA** have been used. These have been provided by the Environment Agency, Essex County Council (ECC) (in their role as the Lead Local Flood Authority (LLFA)), and CPBC. **Section 2** of this Report provides information on the datasets used.

### Mapping

1.4.2 Borough wide mapping of flood risk datasets is included in the online Story Map<sup>6</sup> to enable comparison of the flood risk across the study area. Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.

### Site Screening to support the Sequential Test

1.4.3 A number of factors are influencing the spatial strategy in the Castle Point Borough, and a large pool of potential allocation sites has been under consideration during the preparation of the emerging Castle Point Plan.

1.4.4 A high level sieving exercise has been undertaken to identify:

- Proportion of the site in each Flood Zone as shown on the Flood Map for Planning and Reduction in Risk of Flooding from Rivers and Sea due to Defences.
- Flood Warning Area, Flood Priority Area and Recorded Flood Outline in which the site is located.
- The sites proximity to the nearest Main River and Ordinary Watercourse.
- Sewer flood records based on the site's postcode area.
- River Management, Operational and Body catchment in which the site is located.
- Groundwater Management, Operational and Body catchment in which the site is located.
- The sites Bedrock and Superficial Geology and Susceptibility to Groundwater Flooding status.

<sup>6</sup> AECOM, 2025, Castle Point Online Story Map.

- Proportion of the site at high, medium or low risk of surface water flooding, based on the Risk of Flooding from Surface Water map. The low risk of flooding from surface water layer can be used as an indication of future flood risk.
  - Proportion of the site at risk of reservoir inundation.
- 1.4.5 This information was provided to CPBC in an MS Excel Workbook to enable the application of the sequential approach to their site selection.
- 1.4.6 CPBC has used the information from the high-level sieving exercise, alongside other evidence on general site suitability, sustainability, transport and biodiversity, to identify which sites should be included in the CPBC Local Plan. At this time, only suitable urban sites have been identified. CPBC have identified 35 sites for consideration within this **Level 2 SFRA**.

## Site Assessment Proformas

- 1.4.7 AECOM have prepared site assessment proformas for sites that were identified to be within Flood Zone 2 and/or Flood Zone 3 or have access routes within the Flood Zones. These are included in **Appendix A**. The purpose of the **Level 2 SFRA** is to assess the flood risk posed to the sites and inform the Exception Test, as described in **Section 1.3**.
- 1.4.8 Consideration has also been made of those sites that are at surface water flood risk or have access routes at surface water flood risk. The online Story Map and mapping in **Appendix B** has been used to undertake these assessments.

## 1.5 Future Updates

- 1.5.1 SFRA are intended to be living documents which are kept up to date as information on flood risk management changes.
- 1.5.2 The Environment Agency SFRA guidance<sup>4</sup> states that in order to remain up to date, it may be necessary to update a SFRA to incorporate any changes to:
- the predicted impacts of climate change on flood risk;
  - flood products, for example surface water mapping, flood map for planning;
  - detailed flood modelling - such as from the Environment Agency or LLFA;
  - the local plan, spatial development strategy or relevant local development documents;
  - local flood management schemes;
  - flood risk management plans;
  - local flood risk management strategies; and
  - national planning policy or guidance.
- 1.5.3 In addition, the SFRA may also need to be reviewed after any significant flood event.
- 1.5.4 It is noted that future changes to modelling, planning guidance, or climate change impacts may alter the level of risk posed to a specific site. The most up-to-date flood risk data must be used throughout the planning process to inform ongoing site planning and development design.

## NAFRA2

- 1.5.5 SFRA should be adopted as 'living documents' which are reviewed and updated regularly considering new or revised flood modelling studies, changes to the predicted impacts of climate change, local flood management schemes and/or flood risk management plans.
- 1.5.6 The Environment Agency National Flood Risk Management 2 (NaFRA2) project is ongoing which will lead to changes in flood products. This revision of the SFRA includes NaFRA2 updates associated with the Environment Agency's Flood Map for Planning Flood Zones (fluvial/tidal) and risk of flooding from surface water extents as of November 2025. Datasets are discussed in Section 2 of this report.

## 2. Datasets

### 2.1 Overview

- 2.1.1 The following datasets and sources of information (which were also used as part of the **Level 1 SFRA**) have been obtained to inform the **Level 2 SFRA**.

### 2.2 Flood Zone Data

- 2.2.1 The Flood Map for Planning (rivers and sea) Flood Zones 2 and 3 were downloaded from the Environment Agency in November 2025. Flood Zone 2 includes the Environment Agency's best estimate of the areas of land at risk of flooding, from rivers or the sea with 0.1% chance of flooding each year, when the presence of flood defences is ignored. Flood Zone 3 includes the Environment Agency's best estimate of the areas of land at risk of flooding, when the presence of flood defences is ignored and covers land with a 1% or greater chance of flooding each year from rivers; or with a 0.5% or greater chance of flooding each year from the sea.
- 2.2.2 At the time the proformas were produced, the 'Reduction in Risk of Flooding From Rivers and Sea due to Defences' was used. This is a spatial dataset that indicates where areas have reduced flood risk from rivers and sea due to the presence of flood defences. The dataset was created to help initiate conversations about the impact flood defences have on the risk of flooding from the rivers and sea, and as a prompt to find out more about the flood defences in a particular area of interest. It does not replace any local, more detailed information. It should be highlighted that in October 2024 this dataset was temporarily discontinued and is due to be replaced by a new dataset in the future<sup>7</sup>.

### 2.3 River Modelling Outputs

- 2.3.1 A number of hydraulic river models were provided by the Environment Agency at the start of the **Level 1 SFRA** project in January/February 2024. The models were checked for completeness, date of preparation and the hydrological methods used. Outputs from the models have been used to define the Flood Zone 3b functional floodplain and to map the impacts of climate change on floodplain extents in the future.
- 2.3.2 For the purposes of the SFRA it was proposed that for flooding from fluvial sources only the Prittle Brook and Benfleet Hall Brook model will be used. There are a number of other Main Rivers on Canvey Island which currently do not have any flood zones directly associated with them (as this area is subsumed by the tidal flood zones).
- 2.3.3 The hydraulic models for the Prittle Brook and Benfleet Hall Brook were re-run for the latest climate change allowances as part of the **Level 1 SFRA**. In some cases, updates to the hydrological analysis informing the model have been updated. Section 2.3 of the **Level 1 SFRA** summarises the models that have been received, how they have been used in the SFRA and any updates that have been undertaken. Full details of re-simulations are documented in a separate standalone Technical Note [60725540-FF-001<sup>8</sup>].

### Climate Change Allowances

- 2.3.4 The Environment Agency's online guidance 'Flood risk assessments: climate change allowances'<sup>9</sup> sets out the climate change allowances for peak river flows that should be considered for specific 'management catchments' and provides advice on applying climate change projections when preparing FRAs. The allowances for the management catchments of relevance to the Castle Point study area are set out in Table 2-1. The northern area of the Borough is located within the Combined Essex management catchment and Canvey Island is located within the South Essex management catchment.

<sup>7</sup> [Reduction in Risk of Flooding from Rivers and Sea due to Defences - data.gov.uk](https://www.gov.uk/government/publications/reduction-in-risk-of-flooding-from-rivers-and-sea-due-to-defences)

<sup>8</sup> AECOM, 2024, Castle Point Strategic Flood Risk Assessment, Fluvial Modelling Technical Note, 60725540-FF-001.

<sup>9</sup> Environment Agency (published 2016 and updated May 2022) Flood risk assessments: climate change allowances. Available at: <https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances>

- 2.3.5 A range of allowances are provided based on percentiles<sup>10</sup>. The guidance states that for SFRA the *central* and *higher central* allowances should be used (shaded in grey). When preparing site specific FRAs, the allowance that should be considered is based on the Flood Zone and the vulnerability classification of the development. For example, where More Vulnerable or Less Vulnerable development is proposed in Flood Zones 2 or 3a, the *central* allowance should be applied.
- 2.3.6 The allowances that have been used within this **Level 2 SFRA** are detailed in the following sections. These take into account the allowance specified in the guidance (as noted in Table 2-1) as well as considering what modelled flood extents are *available* within the hydraulic models received from the Environment Agency.

**Table 2-1: Peak River Flow Allowances for management catchments in Castle Point (based on a 1981 to 2000 baseline)**

Management Catchment	Allowance Category	Total potential change anticipated for the '2020's (2015 to 2039)	Total potential change anticipated for the '2050's (2040 to 2069)	Total potential change anticipated for the '2080's (2070 to 2125)
South Essex	Upper end (95th)	22%	27%	48%
	Higher central (70th)	11%	11%	<b>26%</b>
	Central (50th)	6%	5%	<b>17%</b>
Combined Essex	Upper end (95th)	27%	37%	72%
	Higher central (70th)	13%	16%	<b>38%</b>
	Central (50th)	7%	8%	<b>25%</b>

- 2.3.7 Hydraulic modelling of the Prittle Brook and Benfleet Hall Brook includes increases in peak river flow due to the impacts of climate change. Both watercourses are located in the Combined Essex Management Catchment. Scenarios have been undertaken to consider the change to the 3.3%, 1% and 0.1% Annual Exceedance Probability (AEP) flood extents (excluding the presence of defences) when applying increases of 25% (central) and 38% (higher central) to peak river flow. These provide a suitable indication of the central and higher central allowances for the 2080s epoch. These are mapped in the online Story Map and the **Level 1 SFRA**.

## Design Event Flood Outlines

- 2.3.8 The available modelled outputs for the 1% AEP + 25% climate change (central) have been used as the design event within this **Level 2 SFRA** and the site assessments in **Appendix A**.

## Flood Zone 3b Flood Outlines

- 2.3.9 A conservative approach has been taken to define areas of Flood Zone 3b functional floodplain using the 3.3% AEP undefended model results. This is due to the absence of defended models. The only AIMS flood defence within the Prittle Brook model has been removed as it is located outside of the Castle Point administrative area and has no impact on the model outputs in the area of interest. The formal AIMS defences for the Benfleet Hall Brook have been removed from the 1D model. This includes the raised flood embankments around the flood storage area and the wall around the downstream tidal outfall culvert.
- 2.3.10 The 3.3% AEP flood extents have been used as the starting point from which to delineate Flood Zone 3b Functional Floodplain for CPBC, as mapped in the online Story Map and the site assessments in **Appendix A**.

## 2.4 Tidal Modelling Outputs

- 2.4.1 In order to determine the risk of flooding from the Thames Estuary, the scope of the **Level 1 SFRA** included modelling of overtopping and breach in the tidal defences throughout the study area for the

<sup>10</sup> A percentile describes the proportion of possible scenarios that fall below an allowance level. The 50th percentile is the point at which half of the possible scenarios for peak flow fall below it, and half fall above it. The central allowance is based on the 50th percentile; higher central allowance is based on the 70th percentile; upper end allowance is based on the 95th percentile.

0.5% and 0.1% AEP events for both the present day (2025) and for 2125, taking account of climate change. Full details are documented in a separate standalone Technical Note [60725540-TF-001<sup>11</sup>].

- 2.4.2 The breach locations cover two flood cells (Canvey Island and Hadleigh Marshes). All of the breach locations are at walls, embankments or barriers. There are no breaches at structures (i.e. gates, sluices etc.). In total, 9 breach locations are located around Canvey Island and 1 further breach location at Hadleigh Marsh.
- 2.4.3 The following outputs were produced from the hydraulic modelling: maximum flood extents, maximum flood depth, maximum flood hazard grids and maximum water level grids.
- 2.4.4 Time to inundation mapping has also been produced which illustrates the length of time it would take floodwater from a breach to reach a particular site during a 0.1% AEP 2125 upper end climate change scenario.
- 2.4.5 Flood 'hazard' categorises the danger to people for different combinations of flood water depth and velocity. The derivation of these categories is based on the methodology set out by Defra in their Flood Risk Assessment Guidance for New Development FD2320/TR2<sup>12</sup> using the following equation:
  - $Flood\ Hazard\ Rating = ((v+0.5) * D) + DF$  Where  $v$  = velocity (m/s),  $D$  = depth (m),  $DF$  = debris factor
- 2.4.6 The resulting values are grouped into hazard ratings as shown in Table 2-2.

**Table 2-2: Flood Hazard Categories**

Flood Hazard		Description
<b>Low</b>	HR < 0.75	Caution – Flood zone with shallow flowing water or deep standing water
<b>Moderate</b>	0.75 ≥ HR ≤ 1.25	Dangerous for some (i.e., children) – Danger: flood zone with deep or fast flowing water
<b>Significant</b>	1.25 > HR ≤ 2.0	Dangerous for most people – Danger: flood zone with deep fast flowing water
<b>Extreme</b>	HR > 2.0	Dangerous for all – Extreme danger: flood zone with deep fast flowing water

- 2.4.7 The following outputs from the modelling undertaken to inform the **Level 1 SFRA** have been used in this **Level 2 SFRA** and are available on the online Story Map.

#### Overtopping Results

- 0.5% AEP (2125 Higher Central) – Maximum Depth (m)
- 0.5% AEP (2125 Higher Central) – Maximum Hazard Rating
- 0.1% AEP (2125 Higher Central) – Maximum Depth (m)
- 0.1% AEP (2125 Higher Central) – Maximum Hazard Rating

#### Breach Modelling Results

- 0.5% AEP (2125 Higher Central) – Maximum Depth (m)
- 0.5% AEP (2125 Higher Central) – Maximum Hazard Rating
- 0.1% AEP (2125 Higher Central) – Maximum Depth (m)
- 0.1% AEP (2125 Higher Central) – Maximum Hazard Rating
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS01
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS02
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS03
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS04
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS05

<sup>11</sup> AECOM, 2024, Castle Point Strategic Flood Risk Assessment, Tidal and Breach Modelling Technical Note, 60725540-TF-001  
<sup>12</sup> Defra and Environment Agency (2005) FD2320/TR2 Flood Risk Assessment Guidance for New Development.

- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS06
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS07
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS08
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location CAS09
- 0.1% AEP (2125 Upper End) – Time to Inundation Breach Location SOU01

## Design Event Flood Outlines

- 2.4.8 The design event for tidal flooding is the 0.5% AEP 2125 higher central climate change overtopping scenario.

## 2.5 Risk of Flooding from Surface Water

- 2.5.1 The Environment Agency's Risk of Flooding from Surface Water (RoFSW) dataset includes GIS layers showing the extent of flooding from surface water that could result from a flood with a 3.3%, 1% and 0.1% AEP in any given year.
- 2.5.2 It is noted that the RoFSW mapping is not to be used at property level. This is due to the way the maps have been produced and the fact that they are indicative. The maps are therefore not appropriate to act as the sole evidence for any specific planning or regulatory decision or assessment of risk in relation to flooding at any scale without further supporting studies or evidence.
- 2.5.3 The scope of the **Level 1 SFRA** included updated modelling of surface water throughout the study area. The modelling was simulated for the 3.3% AEP, 1% AEP and 0.1% AEP events and these events including climate change using the upper end peak rainfall allowance for the 2080s epoch. The upper end peak rainfall allowance in the 2080s epoch for both management catchments in the Borough is 40% as outlined below. Further details are documented in a separate standalone Technical Note [60725540-SWF-001<sup>13</sup>].
- 2.5.4 The outputs from the surface water modelling undertaken to inform the **Level 1 SFRA** have been used in this **Level 2 SFRA**. Mapping for the whole study area, including the sites considered in this **Level 2 SFRA**, is included within the online Story Map. Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.
- 2.5.5 Critical Drainage Areas (CDAs) as provided by ECC to inform the **Level 1 SFRA** have also been used in this **Level 2 SFRA**. Where sites are located within a CDA, this has been identified alongside planning requirements.

## Climate change

- 2.5.6 The Environment Agency's online guidance 'Flood risk assessments: climate change allowances'<sup>14</sup> sets out the climate change allowances for peak rainfall intensity allowances for specific 'management catchments' and provides advice on applying climate change projections when preparing flood risk assessments. The allowances for the management catchments of relevance to Castle Point are set out in Table 2-3.

**Table 2-3: Peak Rainfall Intensity Allowances for management catchments in Castle Point**

Management Catchment	AEP	Epoch 2050s (2022-2060) or 2070s (2061-2125)	Central Allowance	Upper End Allowance
South Essex	3.3%	'2050s'	20%	35%
	3.3%	'2070s'	20%	35%
	1%	'2050s'	20%	45%
	1%	'2070s'	25%	40%

<sup>13</sup> AECOM, 2024, Castle Point Strategic Flood Risk Assessment, Surface Water Modelling Technical Note, 60725540-SWF-001.

<sup>14</sup> Environment Agency (published 2016 and updated May 2022) Flood risk assessments: climate change allowances.

<https://www.gov.uk/guidance/flood-risk-assessments-climate-change-allowances>

Management Catchment	AEP	Epoch 2050s (2022-2060) or 2070s (2061-2125)	Central Allowance	Upper End Allowance
Combined Essex	3.3%	'2050s'	20%	35%
	3.3%	'2070s'	20%	35%
	1%	'2050s'	20%	45%
	1%	'2070s'	25%	40%

## 2.6 Groundwater Flooding

### BGS Susceptibility to Groundwater Flooding

- 2.6.1 The British Geological Survey (BGS) dataset 'Susceptibility to Groundwater Flooding' can be used to identify where there is potential for groundwater flooding to occur based on geological and hydrogeological information.
- 2.6.2 The information shown in the Susceptibility to Groundwater Flooding mapping is based on conceptual understanding of the regional geology and hydrogeology and is therefore only an indication of where groundwater flooding may occur. It does not indicate hazard or risk, any information on the depth to which groundwater flooding may occur, nor the likelihood of the occurrence of an event of a particular magnitude. This information should not be used in isolation to make planning decisions at any scale or to indicate the risk of groundwater flooding, but it does provide a high level overview of the potential for groundwater flooding. The map shows the following information:
- **Limited potential for groundwater flooding to occur:** In this area there is a limited potential, based on an understanding of the underlying geology and hydrogeological conditions, that groundwater flooding may occur.
  - **Potential for groundwater flooding of property situated below ground level:** In this area there is the potential, based on an understanding of the underlying geology and hydrogeological conditions, that groundwater flooding may occur in property or infrastructure *below ground level*, such as basements.
  - **Potential for groundwater flooding to occur at surface:** In this area there is the potential, based on an understanding of the underlying geology and hydrogeological conditions, that groundwater flooding may occur *above the ground*.
- 2.6.3 All other areas are not considered to be prone to groundwater flooding.
- 2.6.4 Most climate change models indicate an increased likelihood of drier summers, albeit with more intense rainfall when it occurs, and wetter winters. As groundwater flooding occurs primarily as a response to extended periods of rain during late autumn and early winter, there may be an increased risk of groundwater flooding arising from these changing rainfall patterns. However, the complex relationship between rainfall, recharge, groundwater storage and flow make the response to climate change uncertain. As a result, no further modelling or mapping has been undertaken to specifically identify the risk of groundwater flooding in the future as a result of climate change. It is considered that the locations of groundwater flooding are likely to remain similar to those identified in the BGS mapping, however the impact of climate change may be to increase the frequency and severity of groundwater flooding in those locations.
- 2.6.5 Mapping for the whole study area, including the sites considered in this **Level 2 SFRA**, is included within the online Story Map and **Level 1 SFRA**. Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.

## 2.7 Reservoir Flooding

- 2.7.1 The Environment Agency's reservoir flood extents include the extents for all large, raised reservoirs in the event that they were to fail and release the water held on both a dry and wet day when local rivers are at normal levels. This is a 'worst case scenario' and it is unlikely that any actual flood would be this large. This data does not give an indication of the probability of reservoir flooding occurring.

- 2.7.2 The likelihood of reservoir flooding is much lower than other forms of flooding. Current reservoir regulation, which has been further enhanced by the Flood and Water Management Act, aims to make sure that all reservoirs are properly maintained and monitored in order to detect and repair any problem<sup>15</sup>.
- 2.7.3 Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.

## 2.8 Historic Flood Records

### Recorded Flood Outlines

- 2.8.1 The Environment Agency dataset 'Recorded Flood Outlines'<sup>16</sup> has been used to inform the **Level 2 SFRA** site assessments. The dataset shows there has been one significant fluvial flood event associated with the Benfleet Hall Brook (September 1968)<sup>16</sup>. No fluvial flood events associated with the Prittle Brook are indicated by the dataset in the Borough.
- 2.8.2 Mapping for the whole study area, including the sites considered in this **Level 2 SFRA**, is included within the online Story Map and the **Level 1 SFRA**. Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.

### Lead Local Flood Authority Records

- 2.8.3 In their role as the LLFA, ECC has duties to record and investigate flood incidents relating to local sources of flooding, namely flooding from surface water, groundwater and ordinary watercourses. ECC has provided a GIS layer of Flood Incidents to inform the **Level 1 SFRA**.
- 2.8.4 This dataset is presented spatially in the online Story Map and the **Level 1 SFRA**. Mapping local to each of the sites considered in this **Level 2 SFRA** is provided in the site assessments in **Appendix A**.

### Sewer Flooding Records

- 2.8.5 Anglian Water Services Limited (AWSL) provided an extract from their register of flooded properties for the study area. This shows properties that have been affected by sewer flooding (as reported to AWSL) since April 2013. Due to data protection requirements, this data has not been provided at the individual property level; rather the register comprises the number of properties within 4-digit postcode areas that have experienced flooding, either internally or externally, since April 2013. It should be noted that it is likely that there have also been unreported sewer flooding incidents in this area over this time period.
- 2.8.6 This data has been referred to within the **Level 2 SFRA** site assessments in **Appendix A**.

<sup>15</sup> Press Release: 'Reservoir flood maps published' <https://www.gov.uk/government/news/reservoir-flood-maps-published>

<sup>16</sup> Environment Agency Recorded Flood Outlines <https://www.data.gov.uk/dataset/16e32c53-35a6-4d54-a111-ca09031eaaaf/recorded-flood-outlines> (Accessed February 2024)

## 3. Level 2 SFRA Site Assessments

### 3.1 Overview

- 3.1.1 Table 3-1 provides a summary of flood risk issues and constraints for all 35 sites which have been grouped into clusters. It is noted in Table 3-1 whether or not the Exception Test is required in accordance with Table 2 of the PPG (Table 1-2), based on Flood Zone and development vulnerability classification.
- 3.1.2 AECOM have prepared site assessment proformas for sites that were identified to be within Flood Zone 2 and/or Flood Zone 3 (based on the Flood Zone dataset as of November 2025) or have access routes within the Flood Zones. These are included in **Appendix A**.

**Table 3-1: Summary of flood risk issues and constraints**

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>
<b>Benfleet</b>															
40014 / B8c	0.224	312-320 London Rd (Queen Bee's)	22	Developable 6-17	100	0	0	0	0	0	0	Majority of site at very low risk with small area at low risk. Access route at high risk.	Not shown to be prone to groundwater flooding.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area to the north of the site (4%) at low risk ( $\geq 0.1\%$ AEP). The access route to the west on London Road (A13) is at high risk of surface water flooding including climate change. The site is also located within the New Thundersley CDA.
40081 / B5	0.644	Canvey Supply, 223 London Road	80	Developable 6-17	100	0	0	0	0	0	0	Majority of site at very low risk with small area of low to high risk. Access route at high risk.	Potential at surface.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area to the south of the site (9%) at low to high risk. The access route to the west on London Road (A13) is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates the potential for groundwater flooding to occur at surface in the area.
40120 / B8a	0.391	Richmond Avenue Car Park	27	Developable 6-17	0	36	62	2	2.6	0	65	Site at high risk. Surrounding area at high risk.	Not shown to be prone to groundwater flooding.	Development is not permitted in Flood Zone 3b.  Exception Test is required for More Vulnerable development in Flood Zone 3a  Where possible, development should be sequentially located outside of the surface water flood risk area.	The Benfleet Hall Brook (Main River) runs along the western boundary of the site. The majority of the site is defined as Flood Zone 3a 'High Probability of Flooding' (62%). 36% of the site is defined as Flood Zone 2 'Medium Probability of Flooding' and 2% is defined as Flood Zone 3b 'Functional Floodplain' (derived from the Benfleet Hall Brook model). Development is not permitted in Flood Zone 3b. Modelling for the Benfleet Hall Brook shows that during the design event (1% AEP plus a 25% climate change allowance), a small area (2.6%) on the western boundary of the site is at risk of flooding.  The site is at residual risk of flooding from the sea in the event of the failure of flood risk management infrastructure. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.  The modelled surface water risk mapping indicates a surface water flow path to the west of the site associated with the Benfleet Hall Brook. 24% of the site is at low risk, 14% at medium risk and 18% at high risk, a total of 56% of the site. The local road network is at high risk of surface water flooding including the access road to the north along High Road. The site is also located within the South Benfleet CDA.  New development within 8m of a Main River will require consent from the Environment Agency. (Guidance on Environment Agency Flood Risk Activity Permits is available online <a href="https://www.gov.uk/guidance/flood-risk-activities-environmental-permits">https://www.gov.uk/guidance/flood-risk-activities-environmental-permits</a> ).  An 8m wide undeveloped buffer strip should be retained from top of bank alongside Main Rivers. Finished Floor Levels for residential accommodation must be above the design fluvial flood event (1% AEP including central climate change allowance) plus a minimum 300mm freeboard. Development of the site must ensure that the risk of flooding to surrounding areas is not increased, and where possible is reduced (including for all sources of flood risk). As the majority of the site is located within Flood Zone 3a, it is likely that level for level and volume for volume floodplain compensation storage will be required. Refer Level 1 SFRA Section 5.6.  Safe access/egress is achievable to the north along Richmond Avenue which leads to the B1006 High Road.
40155 / B8b	0.145	L/a Villa Park, Tarmarisk	10	Developable 6-17	100	0	0	0	0	0	0	Site at low to medium risk. Surrounding roads at low to medium risk.	Not shown to be prone to groundwater flooding.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates there is a low to medium risk surface water flow path through the site. The access route to the north on Kents Hill Road is at low risk with a small area of medium risk. The site is also located within the South Benfleet CDA.
40204 / B6	0.402	159-169 Church Road	22	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access route at high risk.	Potential at surface.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk indicates the site is at very low risk of surface water flooding. The access road to the south of the site along Church Road is not at risk directly outside of the site, however further south, towards the junction with the London Road (A13), it is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates the potential for groundwater flooding to occur at surface in the area.
40267 ' B7	0.462	Rear of 179-181 Church Road	62	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk.	None shown to be prone to	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk indicates the site is at very low risk of surface water flooding. The

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>	
													Access route at high risk.	groundwater flooding.		access road to the south of the site along Church Road is not at risk directly outside of the site, however further south, towards the junction with the London Road (A13), it is at high risk of surface water flooding. The site is also located within the New Thundersley CDA.
<b>Canvey Island</b>																
40115 / C2	2.104	Knightswick Shopping Centre	210	Developable 6-17	0	0	100	0	0	0	100	Site is at high risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. A small area of the site in the north is at high risk of flooding from surface water, including an allowance for climate change and a small area of the site in the south east is at high risk from a surface water flow path along Folksville Road. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding. The north-west corner of the site is also located within the North Canvey Island CDA.	
40236 / C3	0.093	Canvey Library + Barclays	9	Developable 6-17	0	0	100	0	0	0	100	Site is at high risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The modelled surface water risk mapping indicates that the majority of the site is at risk of flooding from surface water with 39% at low risk, 13% at medium risk and 13% at high risk. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding. The site is also partially located within the North Canvey Island CDA (within the north-west corner of the site).	
40392 / C4	0.479	Grouts and land to rear	23	Developable 6-17	0	0	100	0	0	0	71	Site is at low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The site is also located within the North Canvey Island CDA.	
40462 / C5	0.29	Long Rd & Furtherwick Rd Cluster	29	Developable 6-17	0	0	100	0	0	0	97	Site is at very low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The site is also partially located within the North Canvey Island CDA (northern boundary of the site).	
40112 / C7	1.559	L/a The Paddocks	124	Developable 6-17	0	0	100	0	0	0	100	Site is at high risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. A tributary of Thorncreek Fleet runs along the south west boundary of the site and flows in a south westerly direction before flowing into the Thames Estuary. The watercourse may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).	

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>	
																The modelled surface water risk mapping indicates the site is at low to high risk of flooding from surface water, predominantly in the south of the site with a flow path to the watercourse along the south west boundary. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.
40298 / C8(a)	0.407	Oak Road Car Park	44	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
40273 / C8(b)	0.533	Venables Close Cluster	55	Developable 6-17	0	0	100	0	0	0	100	Site is at low to medium risk. Access routes are at low to medium risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.  An unnamed tributary of Leigh Beck flows south through the centre of the site. Leigh Beck is located approximately 6m south of the site and flows south into the Thames Estuary. The watercourse may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).  The modelled surface water risk mapping indicates the site is at low to medium risk of flooding from surface water which is associated with the ordinary watercourse through the site. The access route to the north on the High Street is at low to medium risk of surface water flooding. The site is also partially located within the North Canvey Island CDA (along the northern boundary).	
10010 / C8(c)	0.13	Canvey Job Centre	13	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
40276 / C15	2.648	Land at The Point	172	Developable 6-17	0	0	100	0	0	0	97	Majority of site at very low risk with small area at low to high risk. Access routes are at medium to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.  An unnamed tributary of Smallgains Creek flows west along the northern boundary of the site. The watercourse may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of a Main River will require consent from the Environment Agency.  A 19m wide undeveloped buffer strip should be retained from the tidal flood defences to the north of the site at Smallgains Marina. New development within 19m of the tidal flood defences will require consent from the Environment Agency (guidance on Environment Agency Flood Risk Activity Permits is available online <a href="https://www.gov.uk/guidance/flood-risk-activities-environmental-permits">https://www.gov.uk/guidance/flood-risk-activities-environmental-permits</a> ).  The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding. There are some small areas of low to high surface water flood risk towards the site boundary which increases when taking climate change into account. The access route to the west on	

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>	
																Point Road is at medium to high risk of surface water flooding. The site is also partially located within the Leigh Beck CDA (within the south-west corner).
40082 / C16(a)	0.106	Former Admiral Jellicoe, High Street	7	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to medium risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The site is also located within the Leigh Beck CDA.	
40125 / C16(b)	0.404	Land to the rear of North Avenue	21	Developable 6-17	0	0	100	0	0	0	100	Majority of site at very low risk with small area at low to high risk. Access routes are at low to medium risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.  An unnamed ordinary watercourse flows south along the eastern boundary of the site, before flowing south into Thorneycreek Fleet and out to the Thames Estuary. The watercourse may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).  The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding with a small area to the south of the site boundary at low to high risk of surface water flooding which increases slightly with climate change. The map indicates the local road network may be susceptible to low to medium risk surface water ponding.	
40231 / C16(c)	0.19	Essex Coachworks, 218 High Street	19	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The site is also located within the North Canvey Island CDA.	
38042 / C16(d)	0.322	Former Council Offices, Long Rd	32	Developable 6-17	0	0	100	0	0	0	100	Site and access routes are at very low risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
40134 / C16(e)	0.107	Corner of Little Gypps Rd & Willow Cl	7	Developable 6-17	0	0	100	0	0	0	100	Majority of site at very low risk with small area at low risk. Access routes are at low risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>	
															More Vulnerable.	
40130 / C16(f)	0.189	Ozonia Gardens, Eastern Esplanade	12	Developable 6-17	0	0	100	0	0	0	100	Majority of site at very low risk with small area at low risk when including climate change. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
40129 / C16(g)	0.171	Land between Station Rd & Seaview Rd	11	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
39880 / C1	0.1	Matrix House, 12-16 Lionel Rd	10	Developable 6-17	0	0	100	0	0	0	100	Majority of site at very low risk with area at low risk. Access routes are at low to high risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The site is also located within the North Canvey Island CDA.	
40255 / C10(c)	0.121	Kushi, Furtherwick Rd	8	Developable 6-17	0	0	100	0	0	0	100	Site is at very low risk. Access routes are at low to medium risk.	Not shown to be prone to groundwater flooding.	Exception Test required: Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.	The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High probability' of flooding from the Thames Estuary. Canvey Island is surrounded by tidal flood defences which provide a high level of protection. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. An internally accessible place of safety should be defined within the proposed development above the breach flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants.	
<b>Hadleigh</b>																
38024 / Had2	0.628	The Island Site, High St / London Rd	74	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access routes at low to medium risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or the sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access road to the south of the site on the High Street is at very low risk of surface water flooding, however there is some low to medium risk ponding further east. The access road to the north of the site along London Road (A13) is at low risk of flooding when including an allowance for climate change.	
39985 / Had3	0.375	Johnsons Factory, London Road	44	Developable 6-17	100	0	0	0	0	0	0	Majority of site is at very low risk. Access routes at low to medium risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or the sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. The surrounding roads are at low to medium risk of surface water flooding including the access routes to the west on London Road and to the north on Meadow Road.	

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>
40118 / Had4(a)	0.317	Castle Lane Car Park	38	Developable 6-17	100	0	0	0	0	0	0	Majority of site is at very low risk with a small area of low risk. Access routes at very low to low risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or the sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area in the centre of the site (7%) at low risk. The access route to the south of the site on Castle Lane is at low risk of surface water flooding. The access route to the north on Castle Lane is at very low risk of surface water flooding.
40195 / Had6	0.093	Hadleigh Clinic, 49 London Road	11	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access routes at low to high risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the south east of the site along Kiln Road (A13) is at very low risk of flooding, although there are areas of low to medium risk through Hadleigh. The access route leading north along the A129 has a small area of high risk.
40034 / Had7	1.142	Land South of Scrub Lane	80	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access routes at low risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates there is a very low risk of surface water flooding at the site. The access route to the west on Scrub Lane and New Road has a small area of low risk ponding. The access route to the east along Scrub Lane is at low risk of flooding.
40220 / B8	0.07	Osbourne Motor Company, London Road	8	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access routes at low risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates there is a very low risk of flooding from surface water at the site. The access road to the north of the site along London Road has some small areas of low risk ponding. This ponding increases with some areas of high risk when an allowance for climate change is considered.
<b>Kiln Road</b>															
40223 / Thun2(a)	3.598	USP College, Kiln Road	380	Developable 6-17	100	0	0	0	0	0	0	Site at low to high risk. Access route at low risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water, with small areas of low to high risk surface water ponding including a 40% allowance for climate change. There is a small area of low risk ponding on Kiln Road (A13) outside the site boundary.
40268 / Thun3(b)	0.178	Thames Loose Leaf, 289 Kiln Road	22	Developable 6-17	100	0	0	0	0	0	0	Site at low to high risk. Access routes at low to high risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates an area of low to high surface water flood ponding towards the south and west of the site. There is a small area of high risk ponding on Kiln Road (A13) outside the site boundary.
40279 / Thun2(b)	2.705	Council Offices, Kiln Road	237	Developable 6-17	100	0	0	0	0	0	0	Majority of site at very low risk with some areas of high risk ponding. Access route at low to high risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. There are some high risk areas of surface water ponding including a 40% allowance for climate change. There is a small area of low risk ponding on the access route to the west along Kiln Road (A13).
<b>Thundersley</b>															
40224 / Thun3(a)	0.19	Thundersley clinic, Kenneth Road	13	Developable 6-17	100	0	0	0	0	0	0	Site is at very low risk. Access routes at low to high risk.	Limited potential for groundwater flooding to occur.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. The modelled surface water risk mapping indicates there is a very low risk of surface water flooding at the site. The access road to the south of the site along Kenneth Road is at low to medium risk along the majority of its length with areas of high-risk ponding. The access road to the north of the site along Hart Road is at low risk of surface water flooding. The site is also located within the New Thundersley CDA.
40197 / B3	0.321	Furniture Kingdom	48	Developable 6-17	100	0	0	0	0	0	0	Majority of site is at very low risk.	Potential below ground level.	Exception Test is not required	The site is in Flood Zone 1, low probability of flooding from rivers and/or sea. This site is not indicated to be at risk of flooding from rivers and/or sea during the design events. Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable

Site Reference / Allocation Number	Area (ha)	Address	Units	Year in Local Plan (when development is likely to occur)	Flood Zone 1 (%)	Flood Zone 2 (%)	Flood Zone 3a (%)	Flood Zone 3b (%)	Proportion of site at risk of flooding from rivers during design event (1% AEP + central CC allowance)	Proportion of site at risk of flooding from overtopping during design event (0.5% AEP + higher central CC allowance)	Proportion of site at risk of flooding from breach (0.5% AEP + higher central CC allowance)	Risk of Flooding from Surface Water: from modelled data	Susceptibility to Groundwater Flooding (BGS Dataset)	Exception Test Required?	Summary of Flood Risk Constraints and Safety of Development <u>(Refer to Appendix A for full details and recommendations for each site highlighted in Orange).</u>
															for the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area of the site (1%) at low to high risk including an allowance for climate change. The area around the site is at risk of localised surface water ponding with a high risk surface water flow path to the north and west of the site. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is potential for groundwater flooding of property situated below ground level.

## 3.2 Site Assessment Proforma Template

- 3.2.1 Site assessment proforms have been prepared for sites that are identified to be within Flood Zone 2 and/or Flood Zone 3 or have access routes within the Flood Zones. These are included in **Appendix A**.
- 3.2.2 Table 3-2 provides an overview of the fields in the site assessment proforms and the source of the information or dataset. An overview of the risk of flooding is provided, based on the available datasets, followed by recommendations for how development could be delivered on the site to meet part (2) of the Exception Test.

**Table 3-2: Datasets and information used for Level 2 Site Assessment Proforms**

Proforma Field	Dataset / information used
<b>Site Description</b>	
<b>Site Reference and Allocation Number</b>	As provided by CPBC (Excel sheet and GIS layer of sites).
<b>Cluster</b>	As provided by CPBC (Excel sheet and GIS layer of sites).
<b>Site Area (ha)</b>	The area of the site (hectares).
<b>Site Name</b>	As provided by CPBC (Excel sheet and GIS layer of sites).
<b>Proposed Units</b>	As provided by CPBC (Excel sheet and GIS layer of sites).
<b>Vulnerability Classification</b>	Defined in accordance with Flood Risk and Coastal Change PPG Table 2.
<b>Flood Zones and Historic Flooding</b>	
<b>Proportion within each Flood Zone</b>	Flood Map for Planning (Rivers and Sea) Flood Zone 2; Flood Map for Planning (Rivers and Sea) Flood Zone 3; Flood Map for Planning (Rivers and Sea); Flood Zone 3b Functional Floodplain outline created from 3.3% AEP Prittle Brook and Benfleet Hall Brook.
<b>Flood Warning Area</b>	Environment Agency Flood Warning Areas.
<b>Recorded River Flooding Outlines in which the site is located</b>	The dates of the flood events that have affected the site, as detailed in the Environment Agency 'Recorded Flood Outlines'.
<b>Proximity to Main River/Watercourse</b>	Calculated using the Environment Agency Main River dataset obtained from the Defra Data Services Platform and the Detailed River Network layer provided by CPBC.
<b>Sewer flooding records within the post code area in which the site is located:</b>	As provided by AWSL. Described in Section 2.6.
<b>Fluvial Flooding</b>	
<b>Maximum Flood Extents</b>	Maximum flood extent map(s) for the watercourses relevant to the site (Prittle Brook and Benfleet Hall Brook), as described in Section 2.2.
<b>Surface Water Flooding</b>	
<b>Risk of Flooding from Surface Water Modelling (present day)</b>	Modelled surface water flood risk, as described in Section 2.5.
<b>Risk of Flooding from Surface Water Modelling (climate change)</b>	Modelled surface water flood risk including an allowance for Climate Change, as described in Section 2.5.
<b>Groundwater Flooding</b>	
<b>Bedrock Geology</b>	Bedrock geology underlying the site, based on BGS mapping.
<b>Superficial Geology</b>	Superficial geology underlying the site, based on BGS mapping.
<b>BGS Susceptibility for Groundwater Flooding</b>	A BGS dataset which gives a high level overview of where groundwater flooding may occur based on a conceptual understanding of regional geology and hydrogeology. Described further in Section 2.6.
<b>Tidal Flooding</b>	
<b>Overtopping Design Event</b>	Maximum depth and hazard from the modelled 2125 0.5% AEP + Higher Central scenario.
<b>Breach Event</b>	Maximum depth and hazard from the modelled 2125 0.5% AEP + Higher Central scenario.
<b>Breach Fastest Time to Inundation</b>	Fastest Time to Inundation from the modelled 0.1% AEP 2125 Upper End scenario and location of the breach.
<b>Other Sources</b>	
<b>Flooding from Reservoirs in the Event of a Break or Failure (when river levels are normal and when there is also flooding from rivers)</b>	Environment Agency datasets obtained from the Defra Data Services Platform.
<b>Exception Test</b>	
An overview of whether the Exception Test is required for the site.	

<b>Flood Risk Summary</b>
An overview of the risk of flooding to the site now and in the future (as a result of the impacts of climate change) based on the information within the proforma.
<b>Site Specific Recommendations</b>
Recommendations for how development could be delivered on the site to meet the requirements of part 2 of the Exception Test (where required) i.e., that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. Recommendations are made in line with the development management measures presented within the <b>Level 1 SFRA<sup>3</sup></b> and typically address the following: <ul style="list-style-type: none"><li>- Applying the sequential approach within the development site,</li><li>- Setting back development from the edge of watercourses,</li><li>- Finished floor levels,</li><li>- Floodplain compensation storage,</li><li>- Access and egress arrangements,</li><li>- Flood warning and evacuation procedures,</li><li>- Surface water management and considerations for SuDS,</li><li>- Further investigation of groundwater levels.</li></ul>

### 3.3 Summary of Sites in Flood Zone 1

3.3.1 All of the sites in this section are located in Flood Zone 1 with no risk of fluvial flooding, no risk of overtopping and no residual risk from a breach event. The sites also have no historic flood risk and are not at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area. **Appendix B** shows the modelled surface water flood risk from present day and with climate change for the sites. Table 3-3 provides an overview of the risk from surface water to each site and the surrounding access roads and also provides an overview of the sites at risk from groundwater flooding. More Vulnerable development (e.g. residential) is permitted in Flood Zone 1 and the Exception Test is not required. The following recommendations are made for these sites:

- Development proposals for the sites should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. For sites with a surface water flow path, development should be sequentially located away from these areas where possible.
- A preliminary Hydrogeological Risk Assessment (HRA) should be undertaken to determine ground conditions and groundwater levels in proximity to the site, and to identify whether the proposed development will impact on groundwater, either from subsurface construction or from changes to surface water drainage. The potential impact of climate change should be included within this assessment. Should the preliminary HRA identify potential for impact, a full HRA should be prepared to identify proposed mitigation measures.
- It is good practice to raise finished floor levels of any new buildings by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.

**Table 3-3: Summary of Surface Water and Groundwater Flood Risk to sites in Flood Zone 1.**

Site Reference / Allocation number	Surface Water and Groundwater Risk Summary
40204 / B6	The site is located in Benfleet. Ground levels are approximately 25.7m AOD to the north of the site and 28m AOD to the south of the site. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access road to the south of the site along Church Road is not at risk directly outside of the site, however further south, towards the junction with the London Road (A13), the road is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates the potential for groundwater flooding to occur at surface in the area.
40267 / B7	The site is located in Benfleet. Ground levels are approximately 28 - 29m AOD across the site. The modelled surface water risk indicates the site is at very low risk of surface water flooding. The access road to the south of the site along Church Road is not at risk directly outside of the site, however further south, towards the junction with the London Road (A13), the road is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding.
40197 / B3	The site is located in Tarpots. Ground levels are approximately 23.6m AOD to the north of the site and 25.5m AOD to the south of the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area of the site (1%) at low to high risk including an allowance for climate change. The area around the site is at risk of localised surface water ponding with a high risk surface water flow path to the north and west of the site. The access route to the west on London Road (A13) is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is potential for groundwater flooding of property situated below ground level.
40081 / B5	The site is located in Benfleet. Ground levels are approximately 26m AOD to the north of the site and 27m AOD to the south of the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area to the south of the site (9%) at low to high risk. These areas of ponding increase with climate change to 16% of the site at low to high risk. The map indicates the local road network may be susceptible to surface water ponding. The access route to the west on London Road (A13) is at high risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates the potential for groundwater flooding to occur at surface in the area.
40014 / B8c	The site is located in Benfleet. Ground levels are approximately 33m AOD to the west of the site and 34m AOD to the east of the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area to the north of the site (4%) at low risk. 18% of the site is at low risk of flooding from surface water including climate change. The map indicates the local road network may be susceptible to surface water ponding. The access route to the west on London Road (A13) is at high risk of surface water flooding including climate change. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding.
40155 / B8b	The site is located in Benfleet. Ground levels are approximately 29m AOD across the site. The modelled surface water risk mapping indicates there is a low to medium risk surface water flow path through the site. With climate change, there is a small area in the south west of the site (7%) which is at high risk. The surrounding roads are at low to high risk of surface water flooding. The access route to the north on Kents Hill Road is at low risk with a small area of medium risk. The site is also located within the South Benfleet CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding.
40224 / Thun3(a)	The site is located in Thundersley. Ground levels are approximately 76m AOD across the site. The access road to the north of the site along Hart Road is at low risk of surface water flooding. The access road to the south of the site along Kenneth Road is at low to medium risk along the majority of its length with areas of high risk ponding. The access road to the north of the site along Hart Road is at low risk of surface water flooding. The site is also located within the New Thundersley CDA. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40223 / Thun2(a)	The site is located in Kiln Road. Ground levels are approximately 80m AOD to the south of the site and 83m AOD to the north of the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water, with small areas of low to high risk surface water ponding including a 40% allowance for climate change. There is a small area of low risk ponding on Kiln Road (A13) outside the site boundary. The access route to the west along Kiln Road (A13) is not at risk of flooding from surface water for approximately 1km. At this point, the access road is at high risk. The access route to the east is also at low risk, with some areas of high risk ponding further east. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.

40279 / Thun2(b)	The site is located in Kiln Road. Ground levels are approximately 78.4m AOD in the south of the site and 80m AOD in the north of the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. There are some high risk areas of surface water ponding including a 40% allowance for climate change. There is a surface water flow path to the east of the site with low risk areas which extend slightly into the site boundary. There is a small area of low risk ponding on the access route to the west along Kiln Road (A13). The access route along Kiln Road (A13) is at high risk of surface water flooding approximately 1.3km west of the site. The access route to the east is also at low risk, with some areas of high risk ponding further east. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40268 / Thun3(b)	The site is located in Thundersley. Ground levels are approximately 72m AOD across the site. The modelled surface water risk mapping indicates an area of low to high surface water flood ponding towards the south and west of the site. These areas of ponding increase with climate change and extend to the north of the site. There is a small area of high risk ponding on Kiln Road (A13) outside the site boundary. The access route leading north along the A129 is also at high risk of surface water flooding. The access route to the east on the A13 is at low to medium risk through Hadleigh. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40195 / Had6	The site is located in Hadleigh. Ground levels are approximately 75m AOD across the site. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the south east of the site along Kiln Road (A13) is at very low risk of flooding, although there are areas of low to medium risk through Hadleigh. The access route leading north along the A129 has a small area of high risk. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40034 / Had7	The site is located in Hadleigh. Ground levels are approximately 69m AOD across the site. The modelled surface water risk mapping indicates there is a very low risk of surface water flooding at the site. The access route to the west on Scrub Lane and New Road has a small area of low risk ponding. The access route to the east along Scrub Lane is at low risk of flooding. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
38024 / Had2	The site is located in Hadleigh. Ground levels are approximately 75m AOD across the site. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access road to the south of the site on the High Street is at very low risk of surface water flooding, however there is some low to medium risk ponding further east. The access road to the north of the site along London Road (A13) is at low risk of flooding when including an allowance for climate change. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
39985 / Had3	The site is located in Hadleigh. Ground levels are approximately 67m AOD across the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. A small area to the west of the site (3%) is at high risk including a 40% allowance for climate change. The surrounding roads are at low to medium risk of surface water flooding including the access routes to the west on London Road and to the north on Meadow Road. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40118 / Had4(a)	The site is located in Hadleigh. Ground levels are approximately 73m AOD across the site. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with a small area in the centre of the site (7%) at low risk. A small area in the centre of the site (4%) is at high risk of flooding from surface water including a 40% allowance for climate change. The access route to the south of the site on Castle Lane is at low risk of surface water flooding. The access route to the north on Castle Lane is at very low risk of surface water flooding. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.
40220 / B8	The site is located in Hadleigh. Ground levels are approximately 74m AOD across the site. The modelled surface water risk mapping indicates there is a very low risk of flooding from surface water at the site. The access road to the north of the site along London Road has some small areas of low risk ponding. This ponding increases with some areas of high risk when an allowance for climate change is considered. The BGS Susceptibility to Groundwater Flooding dataset indicates that there is limited potential for groundwater flooding to occur in the area.

## 4. Summary of Recommendations

- 4.1.1 CPBC is preparing a Local Plan (Castle Point Plan) which contains the overall vision for future development across the Borough. Using the information within the **Level 1 SFRA**, and the high level sieving exercise, alongside other evidence on general site suitability, sustainability, transport and biodiversity, CPBC have identified 35 sites for consideration within this **Level 2 SFRA**. At this time, only suitable urban sites have been identified.
- 4.1.2 For **all** proposed development sites:
- Peak surface water runoff rate from the development must be as close as reasonably practicable to the greenfield runoff rate from the same rainfall event. Supporting evidence must be submitted to justify the proposed discharge rate. Development proposals must demonstrate that the surface water will be managed and discharged from the site in accordance with the drainage hierarchy. Development offers the opportunity to utilise a range of sustainable surface water management techniques which not only contribute to a reduction in discharge rates from the site, but provide amenity, biodiversity and water quality improvements and contribute to mitigating climate change by considering both drought and flood conditions. Development proposals must demonstrate sustainable approaches to the management of surface water making use of SuDS and incorporate soft landscaping, planting, and permeable surfacing. For sites with a surface water flow path, development should be sequentially located away from these areas where possible.
- 4.1.3 For sites where the BGS Susceptibility to Groundwater Flooding mapping shows that there may be risk of groundwater flooding at surface or below ground:
- A preliminary Hydrogeological Risk Assessment (HRA) should be undertaken to determine ground conditions and groundwater levels in proximity to the site, and to identify whether the proposed development will impact on groundwater, either from subsurface construction or from changes to surface water drainage. The potential impact of climate change will be included within this assessment. Should the preliminary HRA identify potential for impact, a full HRA should be prepared to identify proposed mitigation measures. Further details are provided within the **Level 1 SFRA** Section 5.7.
- 4.1.4 For sites in close proximity to a Main River or other watercourse:
- The Environmental Permitting Regulations 2016 require a Flood Risk Activity Permit (FRAP) to be obtained for works on or near a Main River, on or near a flood defence structure, or in a floodplain. Applicants should review the Environment Agency flood risk activities: environmental permit information<sup>17</sup> to determine if a permit is required.
  - Responsibility for the consenting of works by third parties on Ordinary watercourses, under Section 23 of the Land Drainage Act 1991 (as amended by the Flood and Water Management Act 2010), lies with the LLFA. ECC is responsible for the consenting of works to Ordinary Watercourses and has powers to enforce un-consented and non-compliant works. This includes any works (including temporary) that affect flow within the channel (such as in channel structures or diversion of watercourses). Enquiries and applications for Ordinary Watercourse consent should be directed through the ECC website<sup>18</sup>.
- 4.1.5 For sites located within a CDA:
- In line with advice provided by ECC, developments within CDAs should consider the provision of rainwater harvesting where possible and should discharge surface water in line with the drainage hierarchy. Source control measures should be considered across developments and sites should be designed to deliver additional benefits to the wider community through measures that contribute to flood risk reduction and improved surface water management as per paragraph 178 of the NPPF.
  - Development sites in CDAs should discharge at the 100% AEP greenfield rate for all events up to the 1% AEP plus climate change event.

<sup>17</sup> Flood risk activities: environmental permits. <https://www.gov.uk/guidance/flood-risk-activities-environmental-permits>

<sup>18</sup> Essex County Council, Apply for a watercourse consent. Available at: <https://flood.essex.gov.uk/maintaining-or-changing-a-watercourse/apply-for-a-watercourse-consent/>

- Where development sites have a surface water flow path, consideration should be given as to what betterment can be provided to reduce the risk of downstream flooding.
- 4.1.6 Site B8a has a proportion of its area within the 3.3% AEP modelled flood extent. Within **undeveloped areas** of the 3.3% AEP flood extent, development should not be permitted, rather land should be safeguarded for flood storage. Within **developed areas** of the 3.3% AEP flood extent, any proposals to regenerate/replace such building(s) should not increase the footprint any greater than the existing footprint. For areas around the upper reaches of the Benfleet Hall Brook, further discussion will need to take place with CPBC, and further hydraulic modelling may be required to determine Flood Zone 3b. For this site, Finished Floor Levels for residential accommodation must be above the design fluvial flood event (1% AEP including central climate change allowance) plus a minimum 300mm freeboard.
- 4.1.7 For the following sites, CPBC, in consultation with Emergency Planners, will need to determine whether reliance on evacuation prior to a flood event and the provision of places of safety are an appropriate approach to demonstrate safety of development and satisfy the Exception Test. CPBC should also consider and identify opportunities to improve access routes in the future as part of wider infrastructure delivery in these areas.
- 4.1.8 This applies to the following sites and further detail is provided in Table 3-1 and **Appendix A**:
- 40276 (Land at The Point)
  - 40082 (Former Admiral Jellicoe, High Street)
  - 40125 (Land to the rear of North Avenue)
  - 40231 (Essex Coachworks, 218 High Street)
  - 38042 (Former Council Offices, Long Rd)
  - 40134 (Corner of Little Gypps Rd & Willow Cl)
  - 40130 (Ozonia Gardens, Eastern Esplanade)
  - 40129 (Land between Station Rd & Seaview Rd)
  - 40115 (Knightswick Shopping Centre)
  - 40236 (Canvey Library + Barclays)
  - 40392 (Grouts and land to rear)
  - 40462 (Long Rd & Furtherwick Rd Cluster)
  - 40112 (L/a The Paddocks)
  - 40298 (Oak Road Car Park)
  - 40273 (Venables Close Cluster)
  - 10010 (Canvey Job Centre)
  - 39880 (Matrix House, 12-16 Lionel Rd)
  - 40255 (Kushi, Furtherwick Rd)

# Appendix A Site Proformas

SITE REFERENCE: 40120 ALLOCATION NUMBER: B8a CLUSTER: Benfleet SITE AREA: 0.391 ha

SITE NAME: Richmond Avenue Car Park



Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

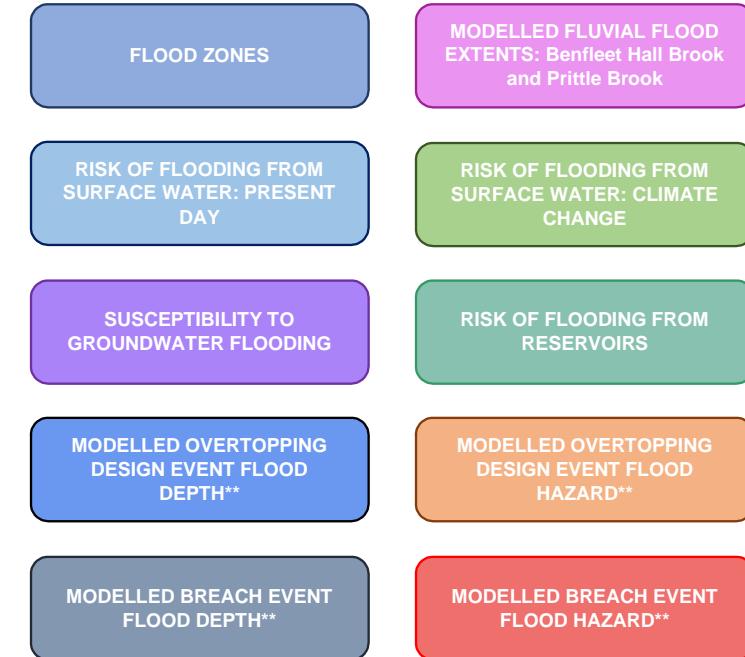

## EXCEPTION TEST?

Development is not permitted in Flood Zone 3b. Exception Test is required for More Vulnerable development in Flood Zone 3a. Where possible, development should be sequentially located outside of the surface water flood risk area.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: N/A

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 65%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS08

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%

WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%

166 records in Postcode Area SS7 5

## FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 2.6%

## SURFACE WATER FLOODING

0.1% AEP: 24% 1% AEP: 14% 3.33%: 18%

0.1% AEP + 40% Climate Change: 27% 1% AEP + 40% Climate Change: 17% 3.33% AEP + 40% Climate Change: 35%

<b>Site Reference</b>	40120	<b>Allocation Number</b>	B8a	<b>Site Name</b>	Richmond Avenue Car Park
<b>Flood Risk Summary</b>					
The site is located in Benfleet. The Benfleet Hall Brook flows south along the western boundary of the site (as shown on the Environment Agency's Statutory Main River Map), before flowing south to Benfleet Creek. The Benfleet Flood Storage Area lies approximately 240m to the south of the site. The majority of the site is defined as Flood Zone 3a 'High Probability of Flooding' (62%). 36% of the site is defined as Flood Zone 2 'Medium Probability of Flooding' and 2% is defined as Flood Zone 3b 'Functional Floodplain' (derived from the Benfleet Hall Brook model). The site does not lie within the Reduction in Risk of Flooding from Rivers and Sea due to Defences area. Modelling for the Benfleet Hall Brook shows that during the design flood event (1% AEP plus a 25% climate change allowance), a small area (2.6%) on the western boundary of the site is at risk of flooding.					
Historic flood records indicate that the site experienced flooding in the September 1968 flood event.					
Modelling has been undertaken to understand the impact from overtopping of the tidal defences and that associated with a breach in the tidal defences. During the design event (0.5% AEP) for the year 2125, the site is shown to be protected from flooding from the Thames. The site is however shown to be at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. This shows that over 50% of the site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The east of the site is not at risk of flooding, there is a small area of 'Extreme' hazard (Danger to All) to the west of the site and an area of 'Significant' hazard (Danger to Most) to the south. The remainder of the site is 'Low' to 'Moderate' hazard (Caution to Danger to Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS08 is approximately 4.7m AOD. Ground levels are approximately 4.5m AOD across the site. Access to the north towards the B1006 is not at risk of flooding.					
The site is located within the South Benfleet Critical Drainage Area. The modelled surface water risk mapping indicates a surface water flow path to the west of the site associated with the Benfleet Hall Brook. 24% of the site is at low risk, 14% at medium risk and 18% at high risk, a total of 56% of the site. When taking climate change into consideration, the extent of surface water flooding increases with a total of 79% of the site at low to high risk. The local road network is at high risk of surface water flooding including the access road to the north along High Road.					
The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.					
<b>Site Specific Recommendations</b>					
27 residential units are proposed for the site. More Vulnerable development (e.g. residential) is permitted in Flood Zones 1 and 2 (98% of the site). More Vulnerable development is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made:					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>• Development is not permitted in Flood Zone 3b. This part of the site should be retained as floodplain and steps taken to restore land to provide a more natural edge of the Benfleet Hall Brook.</li> <li>• Development of the site must ensure that the risk of flooding to surrounding areas is not increased, and where possible is reduced (including for all sources of flood risk). As the majority of the site is located within Flood Zone 3a, it is likely that level for level and volume for volume floodplain compensation storage will be required. Refer Level 1 SFRA Section 5.6.</li> <li>• An 8m wide undeveloped buffer strip should be retained from top of bank alongside the Benfleet Hall Brook and opportunities should be explored for riverside restoration. New development within 8m of a Main River will require consent from the Environment Agency (guidance on Environment Agency Flood Risk Activity Permits is available online <a href="https://www.gov.uk/guidance/flood-risk-activities-environmental-permits">https://www.gov.uk/guidance/flood-risk-activities-environmental-permits</a>).</li> <li>• The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the breach flood level during the extreme event (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS08 is approximately 5.3m AOD.</li> <li>• Finished Floor Levels for residential accommodation must be above the design fluvial flood event (1% AEP including central climate change allowance) plus a minimum 300mm freeboard. Flood resilience and resistance measures should be implemented (refer to Level 1 SFRA Section 5.8).</li> </ul>					


- Safe access/egress (i.e. that is dry or Low hazard during the 1% AEP event including central climate change allowance) is achievable for the site. A dry route is available north along Richmond Avenue which leads to the B1006 High Road.
- The site is located within the 'Canvey Island North' Flood Warning Area. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.

#### **Surface Water**

- Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. Development should be sequentially located away from the surface water flow path where possible.
- Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.
- As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.

SITE REFERENCE: 40115 ALLOCATION NUMBER: C2 CLUSTER: Canvey TC SITE AREA: 2.104 ha

SITE NAME: Knightswick Shopping Centre

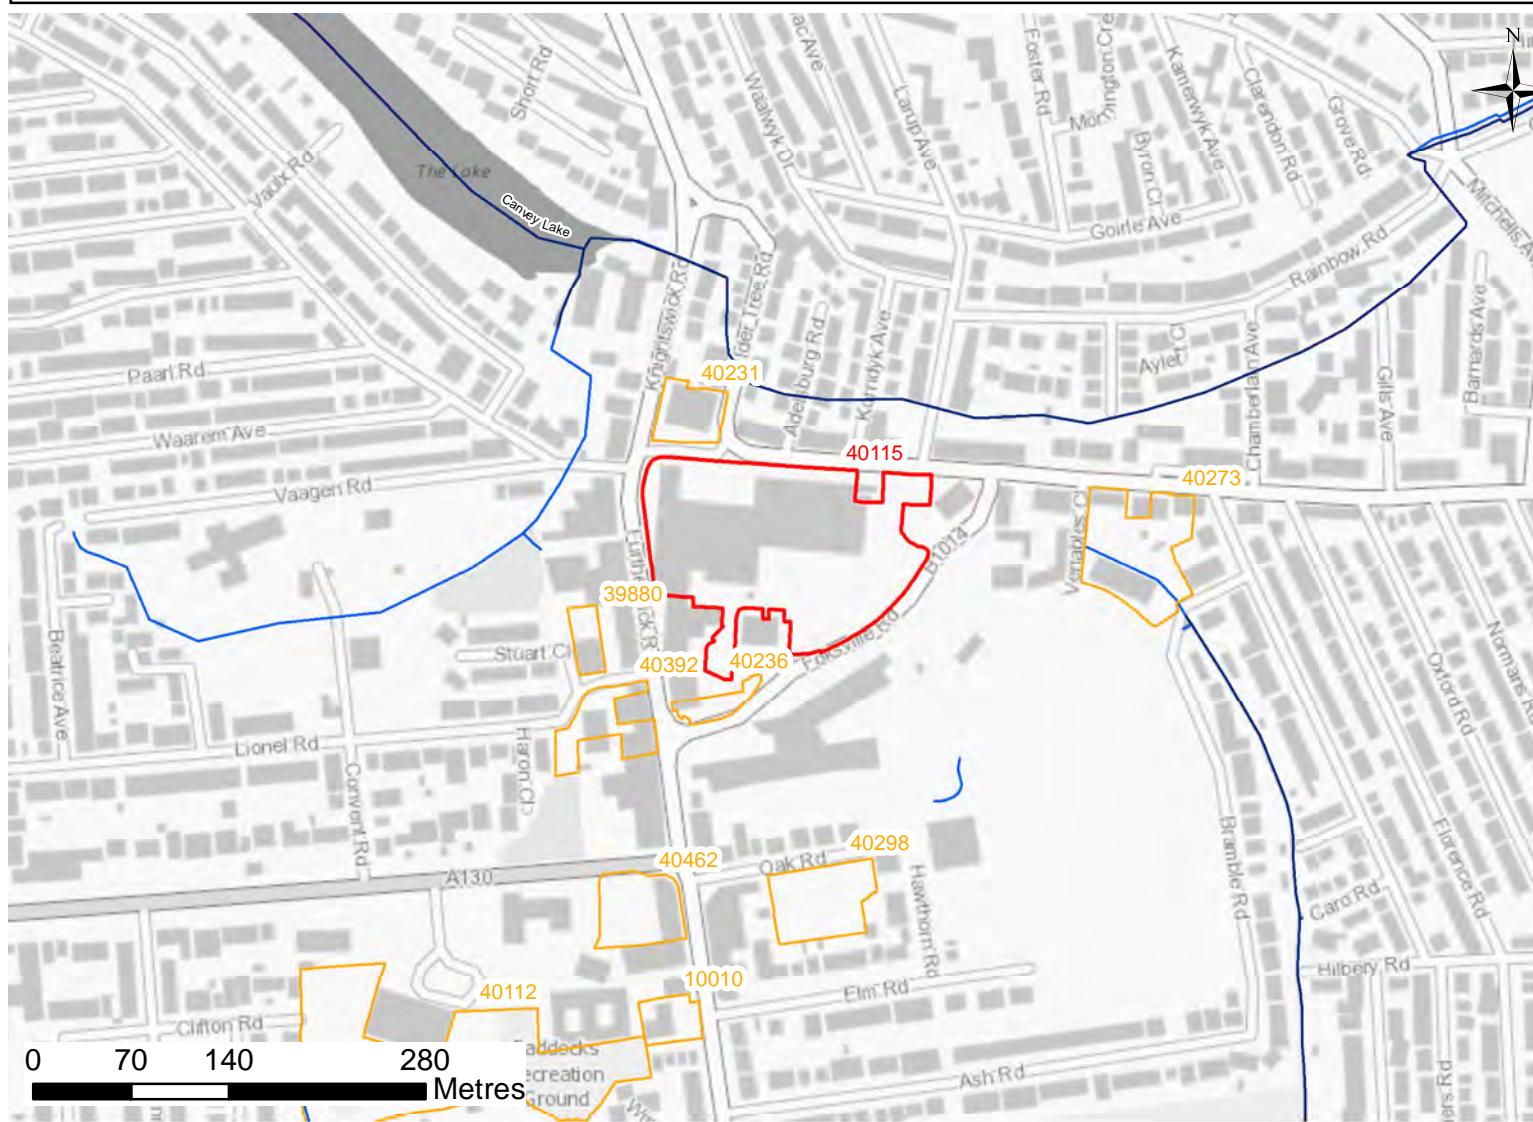

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 210

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 51m

PROXIMITY TO NEAREST WATERCOURSE: 50m

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 records in Postcode Area SS8 7

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING


0.1% AEP:	5%	1% AEP:	2%	3.33%:	1%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	7%	1% AEP + 40% Climate Change:	3%	3.33% AEP + 40% Climate Change:	5%
--------------------------------	----	------------------------------	----	---------------------------------	----

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

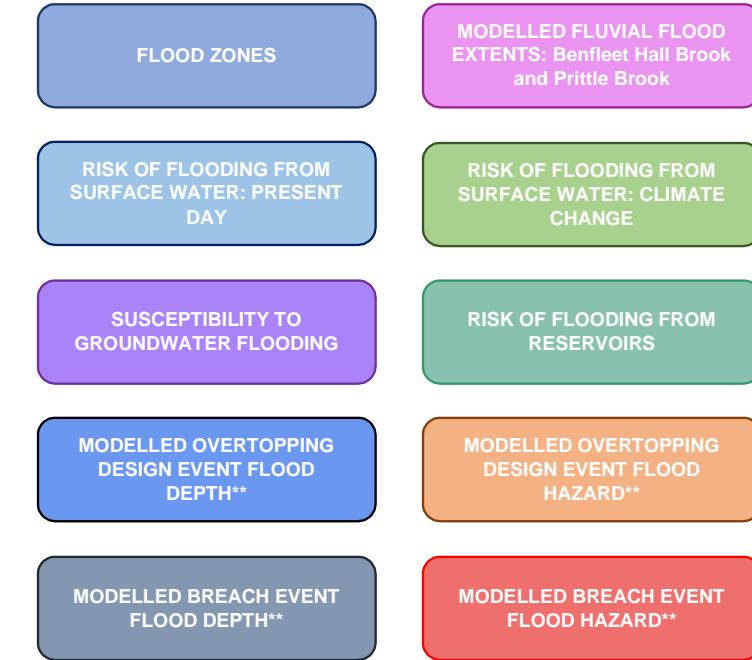

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: <1 hour

FROM BREACH LOCATION(S): CAS06

### RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


#### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40115	Allocation Number	C2	Site Name	Knightswick Shopping Centre
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. An unnamed Main River which feeds into Canvey Lake is located approximately 48m north of the site (as shown on the Environment Agency's Statutory Main River Map). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The east of the site is at 'Significant' hazard (Danger for Most) with the central and western areas at 'Low' to 'Moderate' hazard (Caution to Danger for Some). The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.5m AOD. Ground levels are approximately 2.3m AOD across most of the site and 1.7m AOD to the south east of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. A small area of the site in the north is at high risk of flooding from surface water, including an allowance for climate change and a small area of the site in the south east is at high risk from a surface water flow path along Folksville Road. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.</p>					
<p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>210 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. Development should be sequentially located away from the surface water flow path where possible.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 40236 ALLOCATION NUMBER: C3 CLUSTER: Canvey TC SITE AREA: 0.093 ha

SITE NAME: Canvey Library and Barclays

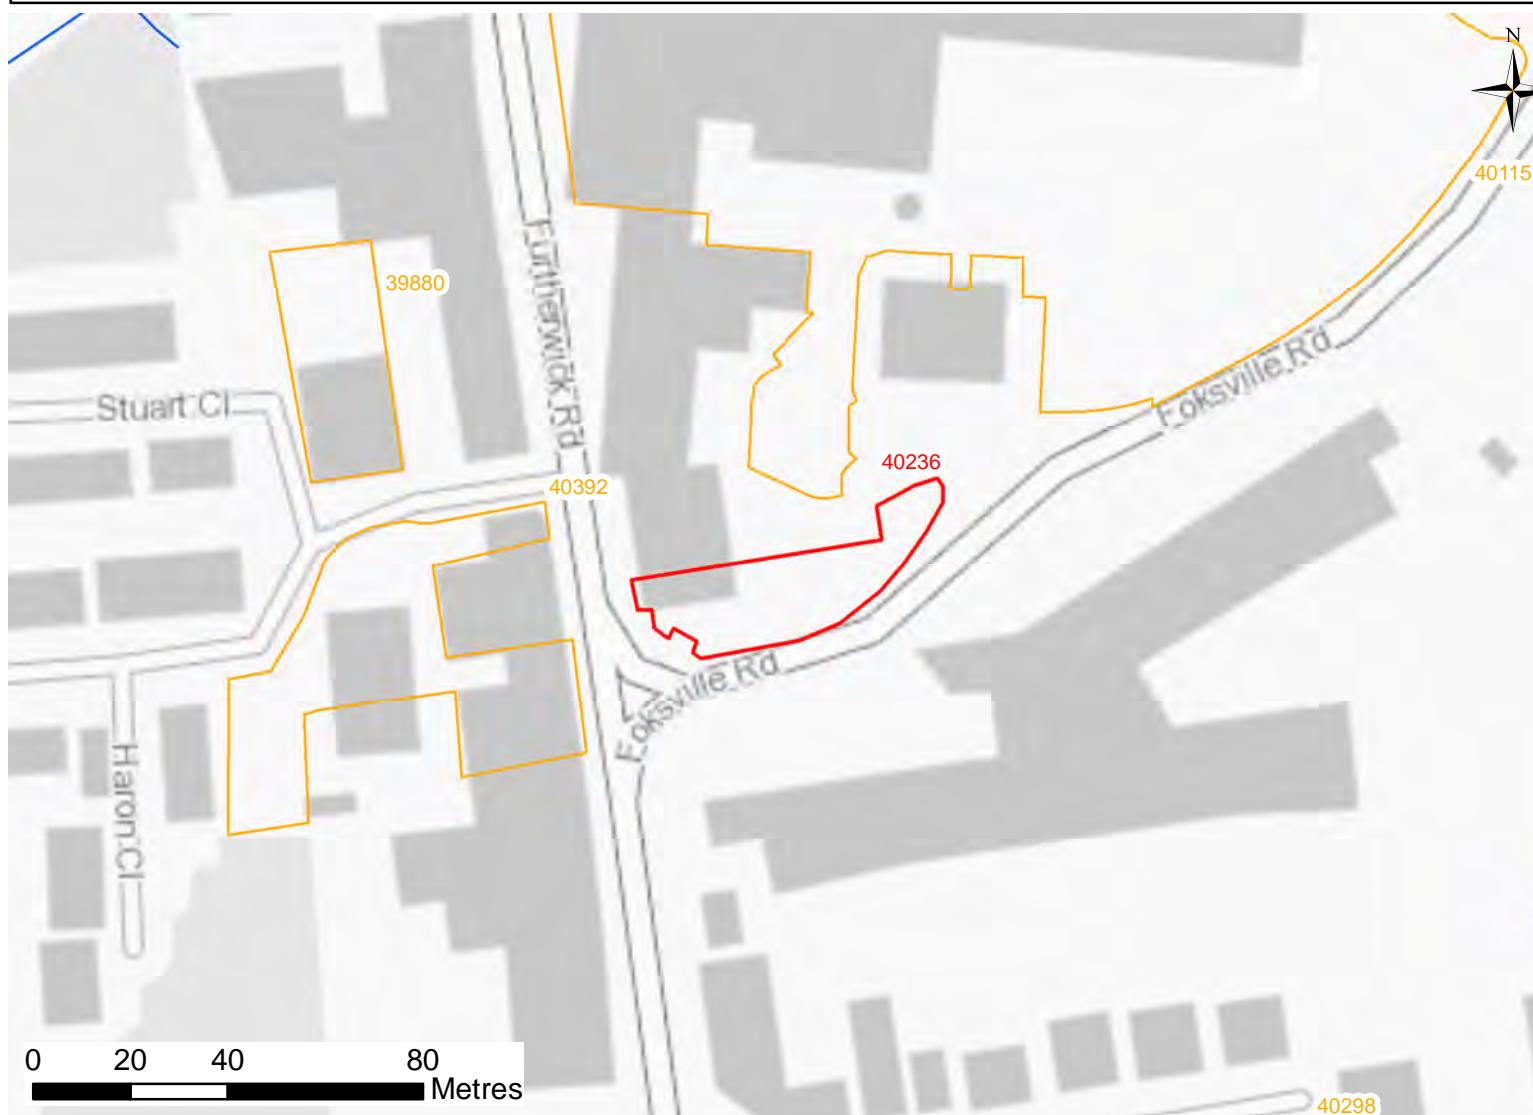

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

FLOOD ZONES

MODELED FLUVIAL FLOOD EXTENTS: Benfleet Hall Brook and Prittle Brook

RISK OF FLOODING FROM SURFACE WATER: PRESENT DAY

RISK OF FLOODING FROM SURFACE WATER: CLIMATE CHANGE

SUSCEPTIBILITY TO GROUNDWATER FLOODING

RISK OF FLOODING FROM RESERVOIRS

MODELED OVERTOPPING DESIGN EVENT FLOOD DEPTH\*\*

MODELED OVERTOPPING DESIGN EVENT FLOOD HAZARD\*\*

MODELED BREACH EVENT FLOOD DEPTH\*\*

MODELED BREACH EVENT FLOOD HAZARD\*\*

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

PROPOSED UNITS: 9

VULNERABILITY CLASSIFICATION: More Vulnerable

## FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 212m

PROXIMITY TO NEAREST WATERCOURSE: 143m

## ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 records in Postcode Area SS8 7

## FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

## SURFACE WATER FLOODING

0.1% AEP:	39%	1% AEP:	13%	3.33%:	13%
-----------	-----	---------	-----	--------	-----

0.1% AEP + 40% Climate Change:	29%	1% AEP + 40% Climate Change:	20%	3.33% AEP + 40% Climate Change:	29%
--------------------------------	-----	------------------------------	-----	---------------------------------	-----

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40236	Allocation Number	C3	Site Name	Canvey Library + Barclays
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Significant' hazard (Danger for Most) with a small area to the west as 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.6m AOD. Ground levels are approximately 2.0m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates that the majority of the site is at risk of flooding from surface water with 39% at low risk, 13% at medium risk and 13% at high risk. When taking climate change into consideration, the extent of surface water flooding increases with a total of 78% of the site at low to high risk. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>9 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety. Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. Development should be sequentially located away from the surface water flow path where possible.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 40392 ALLOCATION NUMBER: C4 CLUSTER: Canvey TC SITE AREA: 0.479 ha

SITE NAME: Grouts and land to the rear

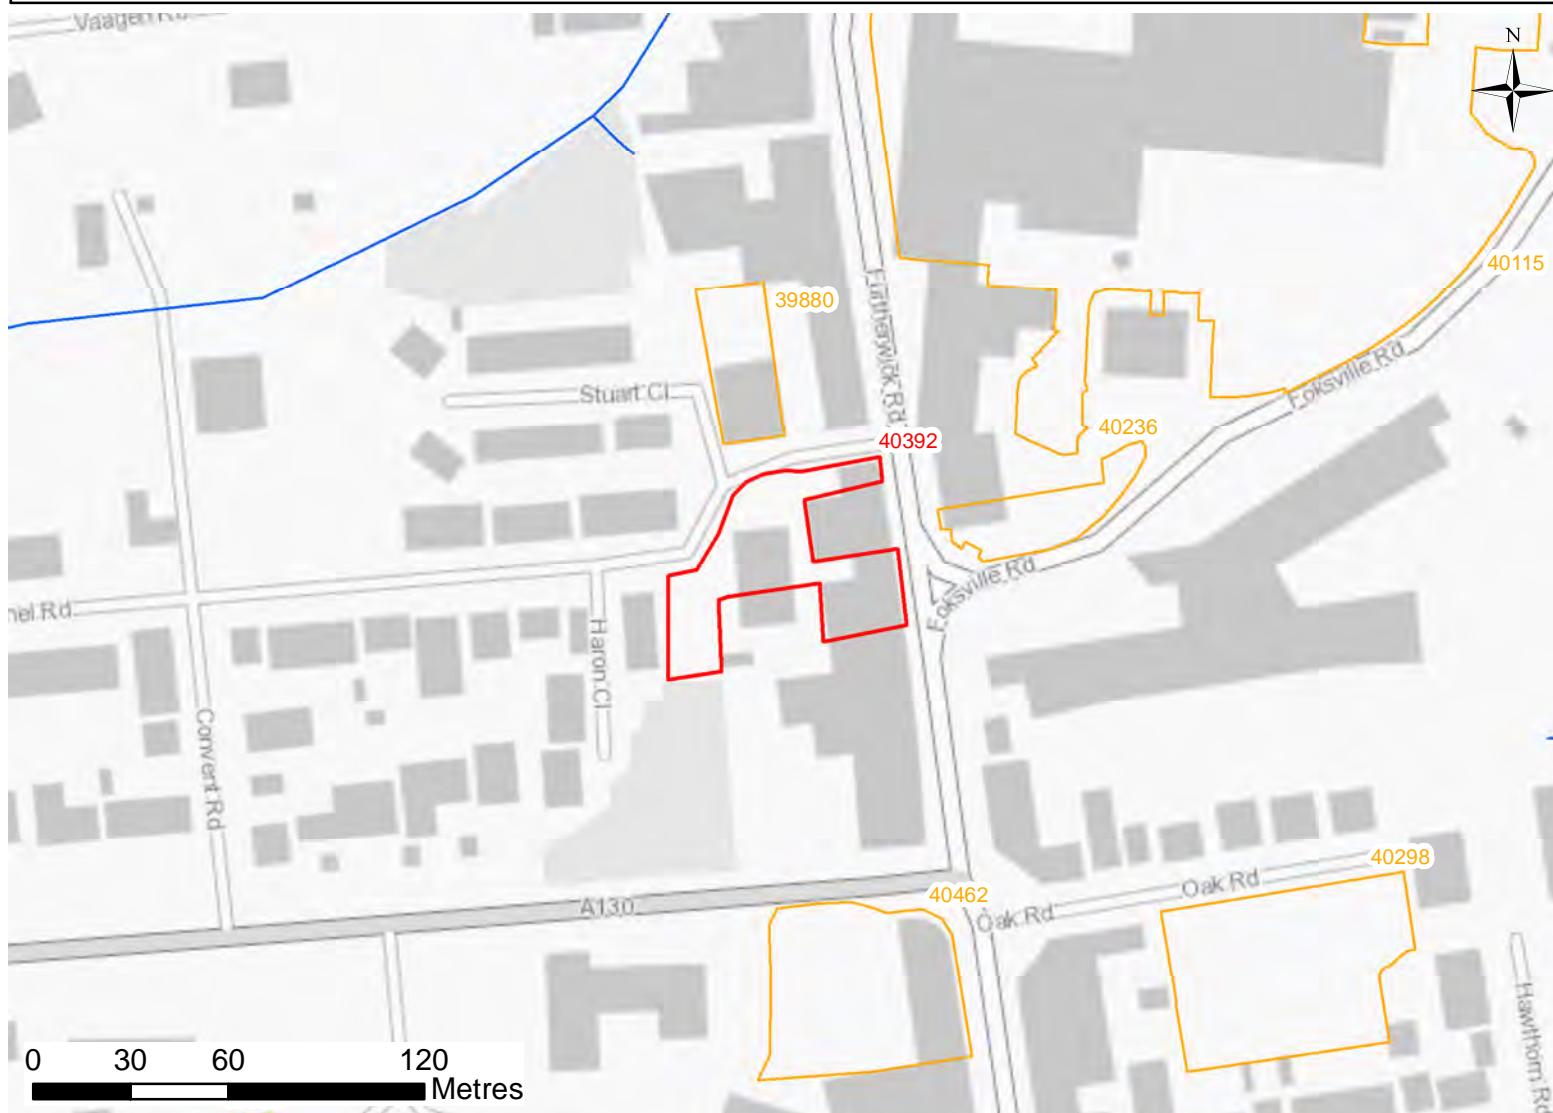

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 23

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 224m

PROXIMITY TO NEAREST WATERCOURSE: 106m

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

228 and 134 records in Postcode Area SS8 9 and SS8 7, respectively

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	2%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	2%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

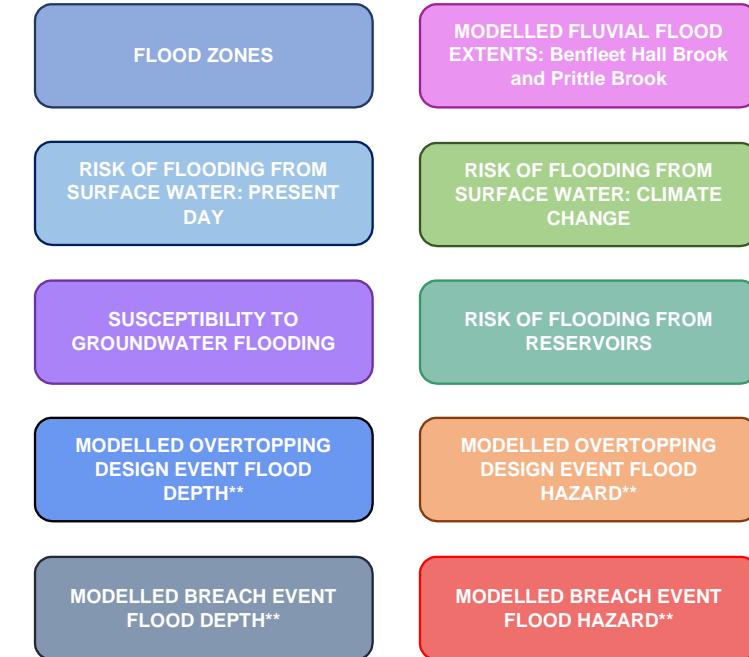

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 71%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS03, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40392	Allocation Number	C4 <th>Site Name</th> <td>Grouts and land to rear</td>	Site Name	Grouts and land to rear
<b>Flood Risk Summary</b>					
The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.					
Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Low' hazard (Caution) with an area to the south west as 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0 and 0.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.5m AOD. Ground levels are approximately 2m AOD in the south of the site and 2.4m AOD in the north of the site. Access off Canvey Island is also at risk of flooding from a breach event.					
The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the majority of the site is not at risk of flooding from surface water with a small area to the south (2%) at low risk when considering climate change. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.					
The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.					
<b>Site Specific Recommendations</b>					
23 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.6m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 40462 ALLOCATION NUMBER: C5 CLUSTER: Canvey TC SITE AREA: 0.29 ha

SITE NAME: Long Road and Furtherwick Road Cluster

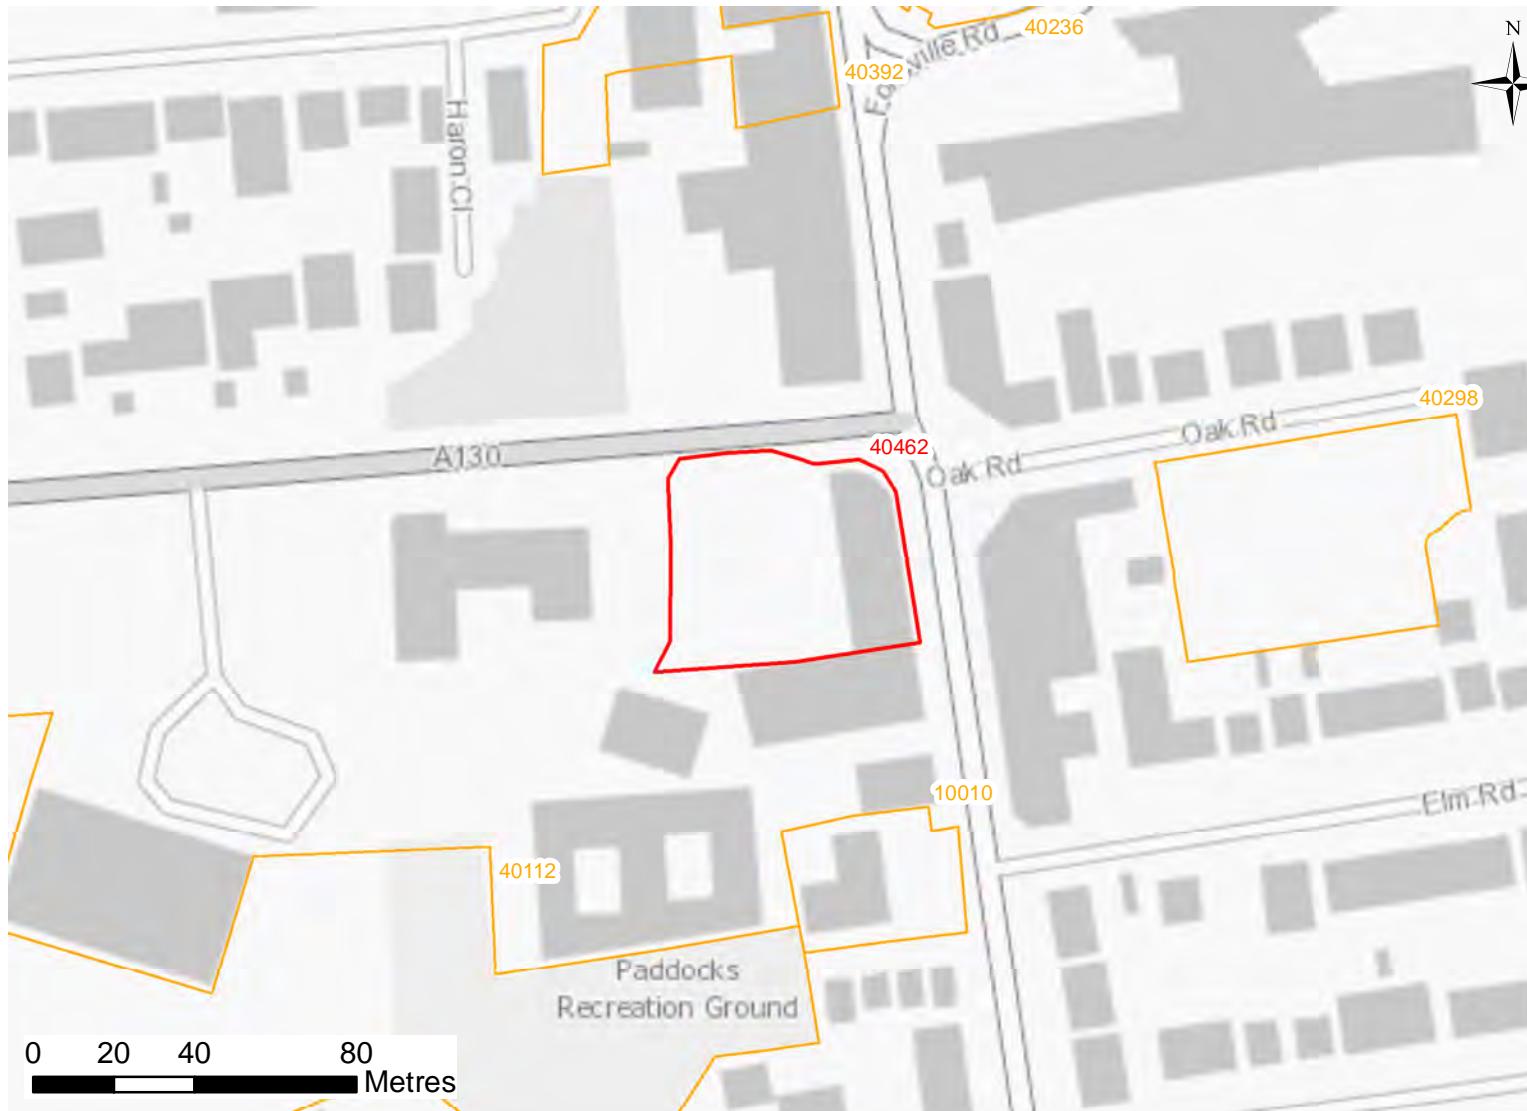

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 29

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island south

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 348m

PROXIMITY TO NEAREST WATERCOURSE: 192m

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 and 90 records in Postcode Area SS8 7 and SS8 0, respectively

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

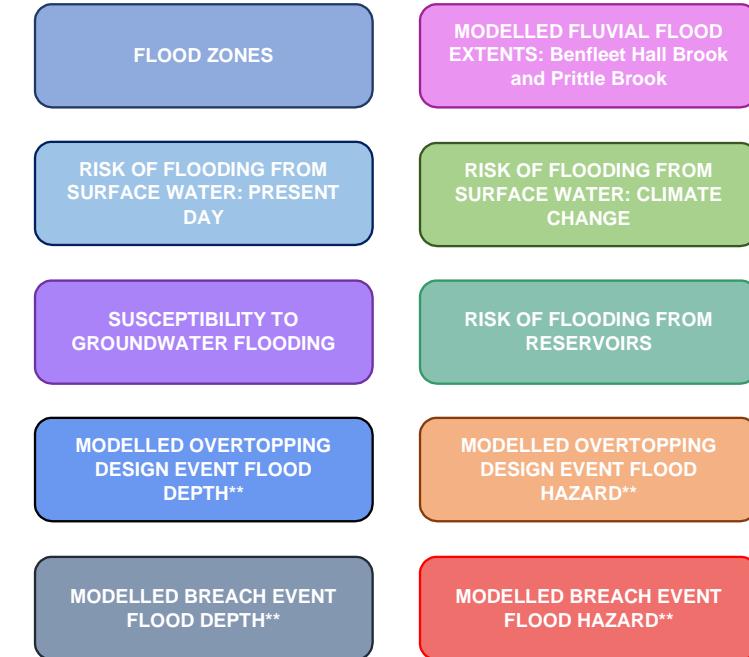

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 97%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS02, CAS03, CAS04, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40462	Allocation Number	C5 <th>Site Name</th> <td>Long Rd &amp; Furtherwick Rd Cluster</td>	Site Name	Long Rd & Furtherwick Rd Cluster
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The south west corner of the site is 'Significant' hazard (Danger for Most) with the remainder of the site as 'Low' to 'Moderate' hazard (Caution to Danger for Some). The maximum flood depth during this event is between 0 and 0.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.6m AOD. Ground levels are approximately 2.3m AOD across the site with levels of approximately 2m AOD in the south west of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>29 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>• The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.6m AOD.</li> <li>• The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>• Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>• Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>• Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>• As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 40112 ALLOCATION NUMBER: C7 CLUSTER: Canvey TC SITE AREA: 1.559 ha

SITE NAME: Land above The Paddocks

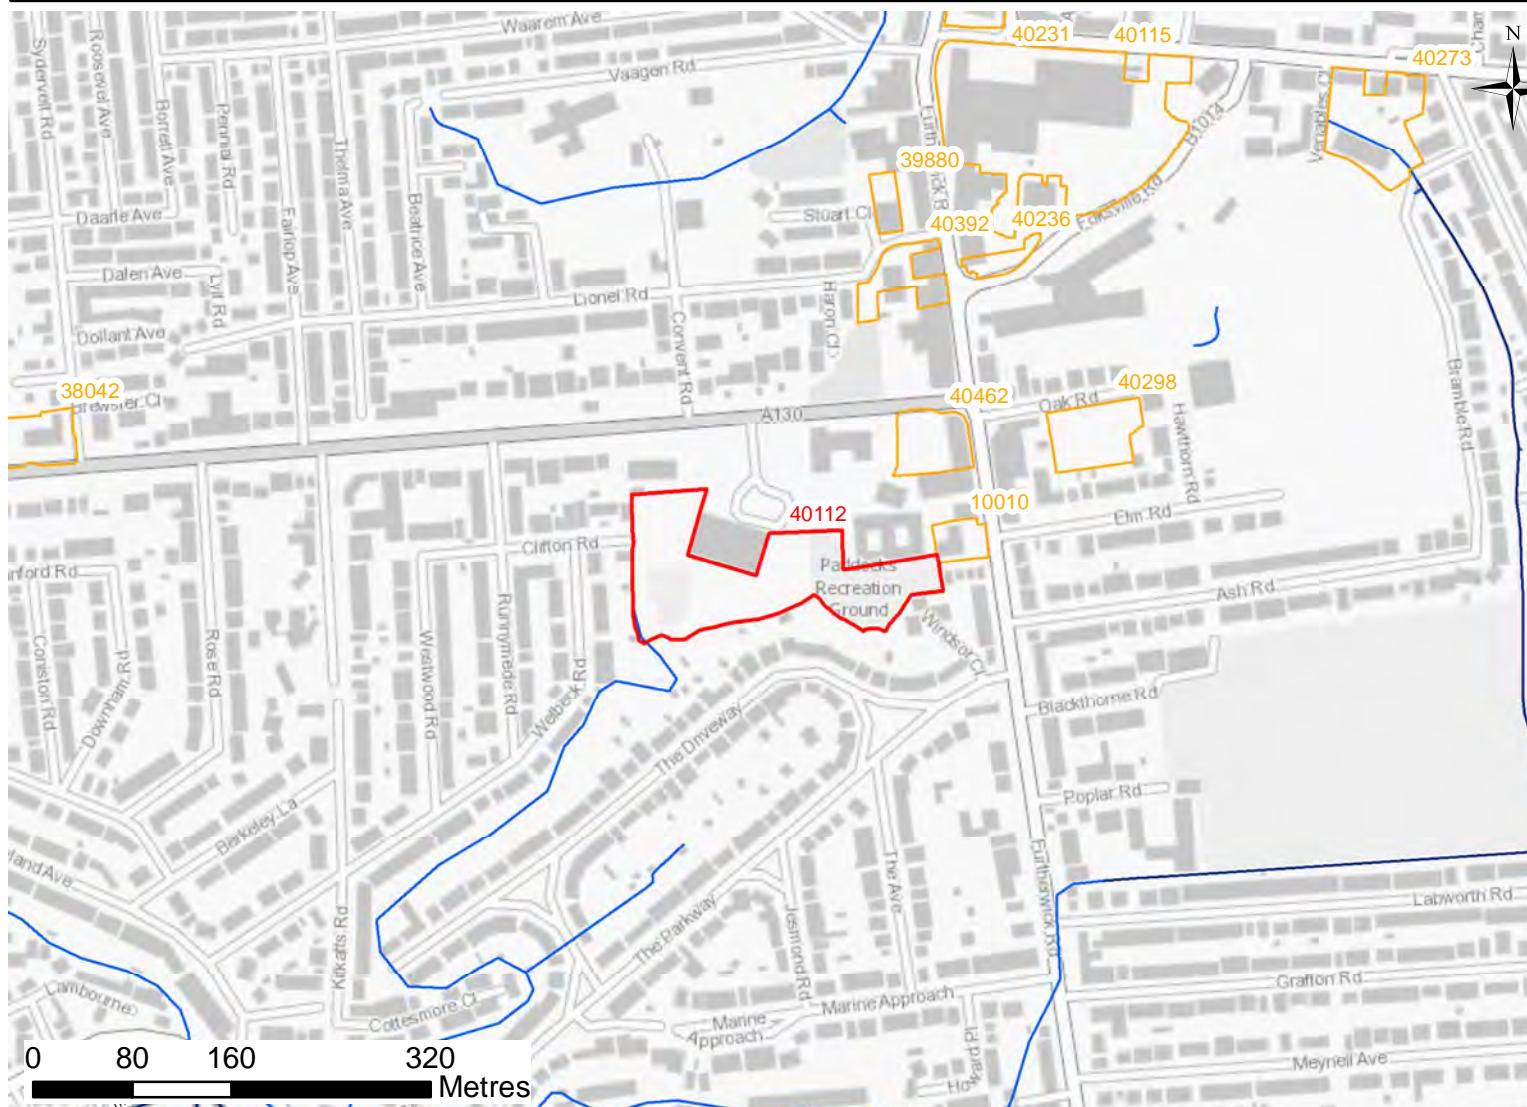

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 124

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island south

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 266m

PROXIMITY TO NEAREST WATERCOURSE: Located on edge of site boundary

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 and 90 records in Postcode Area SS8 7 and SS8 0, respectively

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	13%	1% AEP:	3%	3.33%:	4%
-----------	-----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	31%	1% AEP + 40% Climate Change:	7%	3.33% AEP + 40% Climate Change:	8%
--------------------------------	-----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

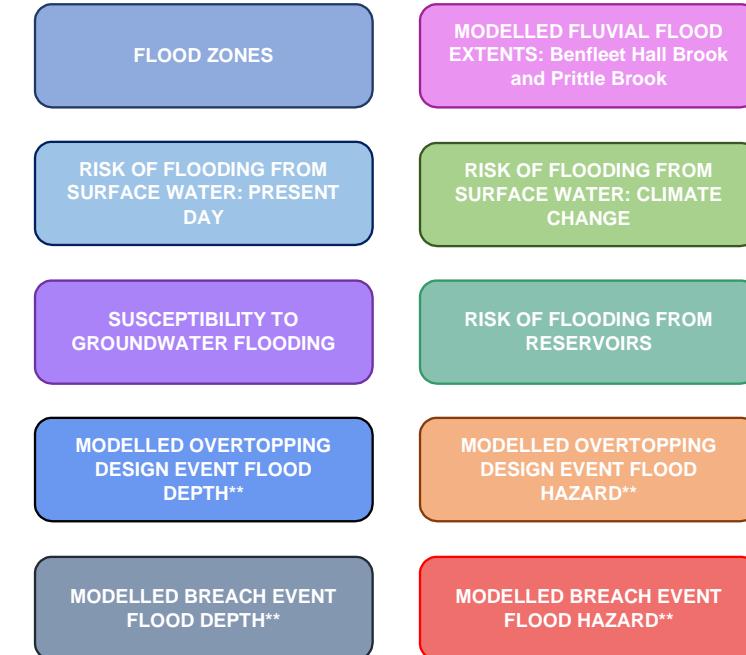

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS02, CAS03, CAS04, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40112	Allocation Number	C7	Site Name	L/a The Paddocks
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. A tributary of Thorneycreek Fleet (Ordinary Watercourse) flows along the south west boundary of the site and flows in a south westerly direction before flowing into the Thames Estuary (as shown on the OS Watercourse layer). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (99%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The entire site is at 'Significant' hazard (Danger for Most). The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.5m AOD. Ground levels are approximately 1.6m AOD to 1.8m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The modelled surface water risk mapping indicates the site is at low to high risk of flooding from surface water, predominantly in the south of the site with a flow path to the watercourse along the south west boundary. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>124 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The unnamed Ordinary Watercourse which flows through the site may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).</li> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.6m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. Development should be sequentially located away from the surface water flow path where possible.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40298 ALLOCATION NUMBER: C8(a) CLUSTER: Canvey TC SITE AREA: 0.407 ha

SITE NAME: Oak Road Car Park

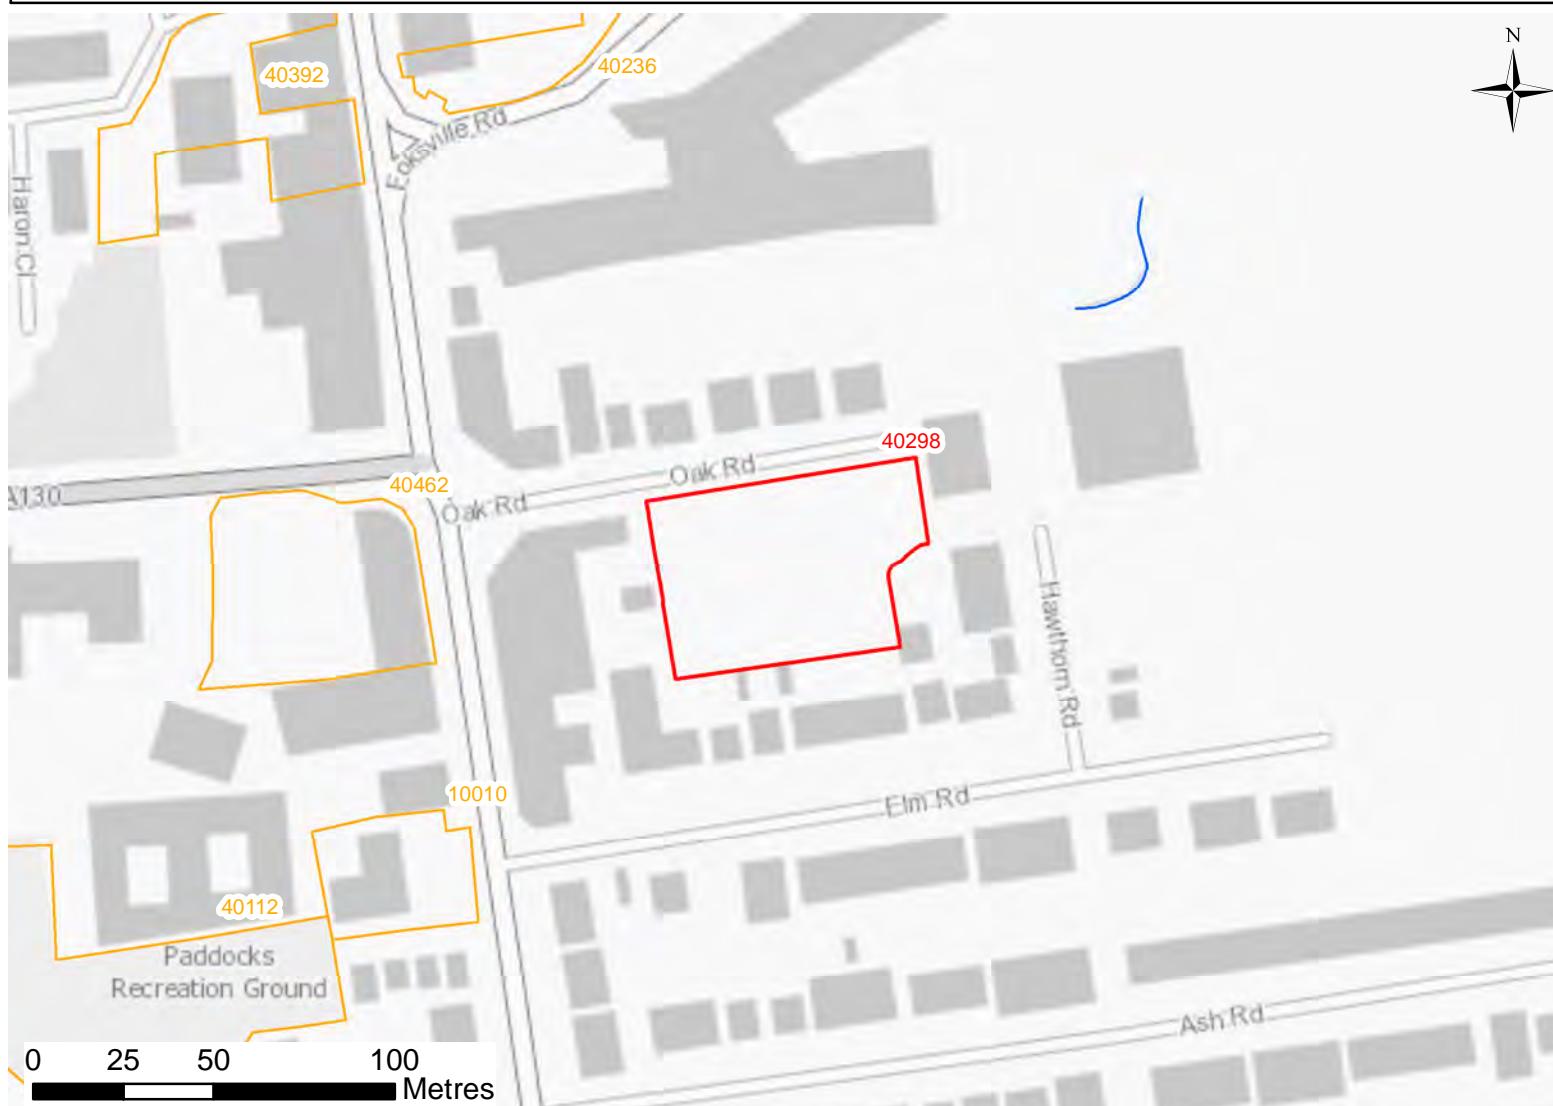

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 44

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island south

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 281m

PROXIMITY TO NEAREST WATERCOURSE: 60m

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 records in Postcode Area SS8 7

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

- |  |  |
|--|--|
| FLOOD ZONES                                      | MODELED FLUVIAL FLOOD EXTENTS: Benfleet Hall Brook and Prittle Brook |
| RISK OF FLOODING FROM SURFACE WATER: PRESENT DAY | RISK OF FLOODING FROM SURFACE WATER: CLIMATE CHANGE                  |
| SUSCEPTIBILITY TO GROUNDWATER FLOODING           | RISK OF FLOODING FROM RESERVOIRS                                     |
| MODELED OVERTOPPING DESIGN EVENT FLOOD DEPTH**   | MODELED OVERTOPPING DESIGN EVENT FLOOD HAZARD**                      |
| MODELED BREACH EVENT FLOOD DEPTH**               | MODELED BREACH EVENT FLOOD HAZARD**                                  |

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS03, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40298	Allocation Number	C8(a)	Site Name	Oak Road Car Park
<b>Flood Risk Summary</b>					
The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.					
Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Significant' hazard (Danger for Most) with a small area to the north as 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.6m AOD. Ground levels are approximately 2m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.					
The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.					
The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.					
<b>Site Specific Recommendations</b>					
44 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40273 ALLOCATION NUMBER: C8(b) CLUSTER: Canvey TC SITE AREA: 0.533 ha

SITE NAME: Venables Close Cluster

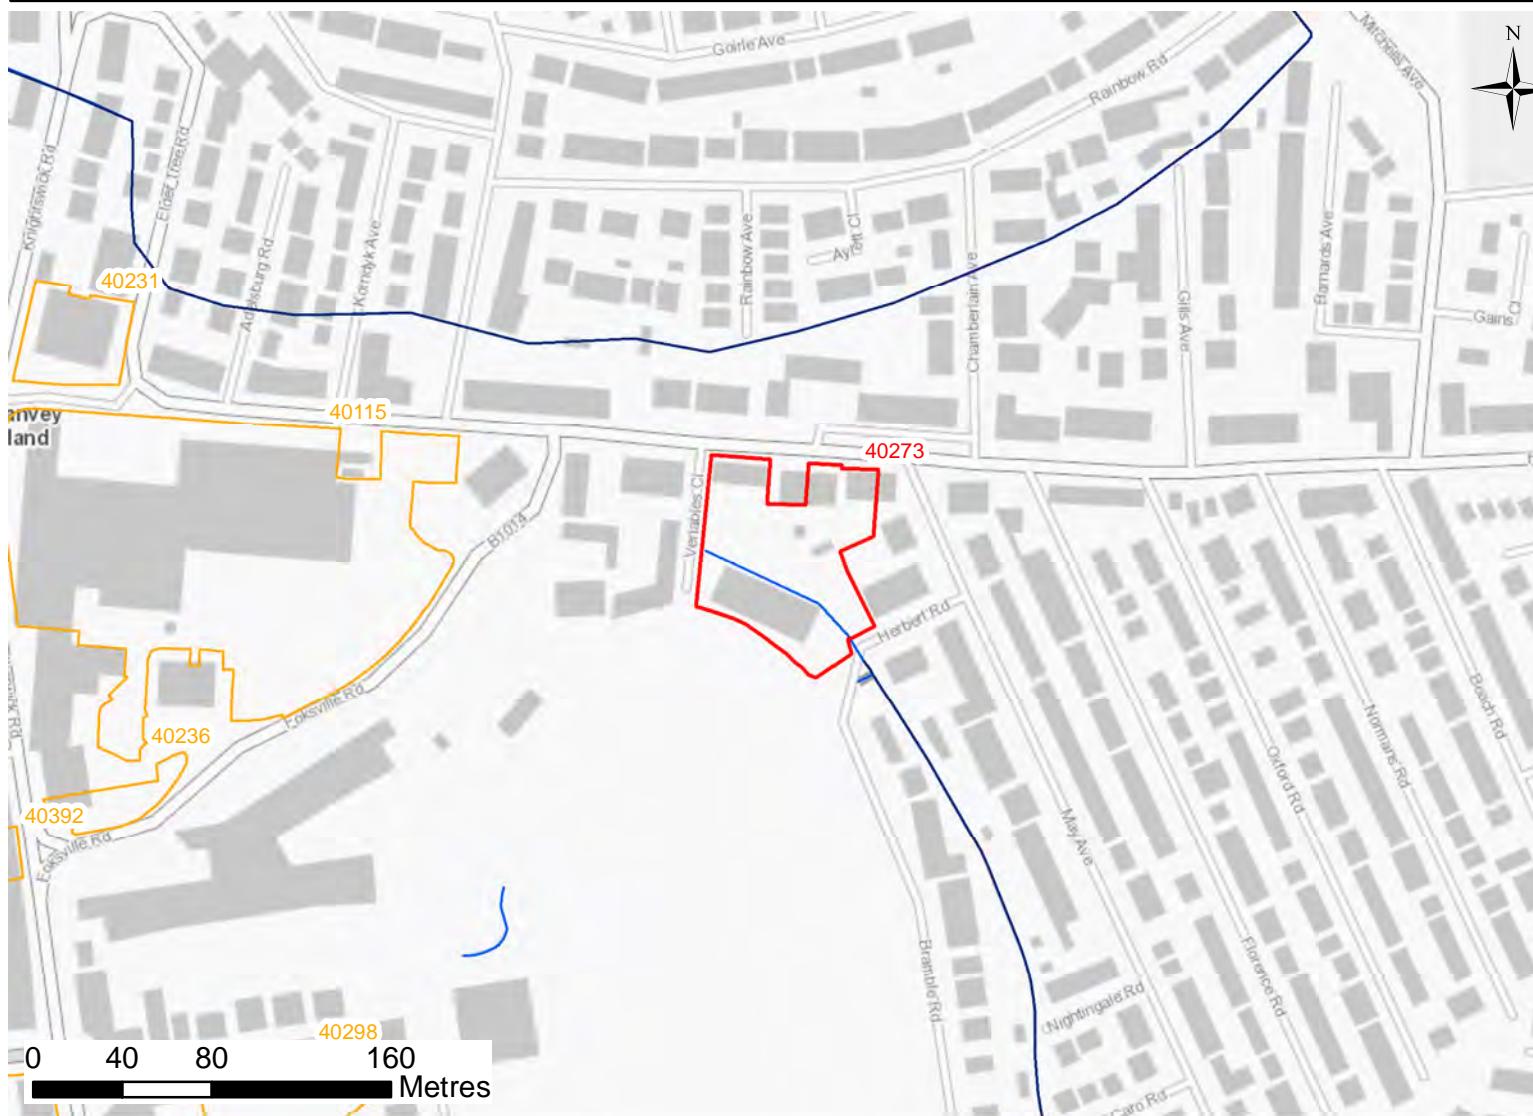

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 55

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island south

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 6m

PROXIMITY TO NEAREST WATERCOURSE: Located within site boundary

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 records in Postcode Area SS8 7

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	9%	1% AEP:	2%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	24%	1% AEP + 40% Climate Change:	7%	3.33% AEP + 40% Climate Change:	2%
--------------------------------	-----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

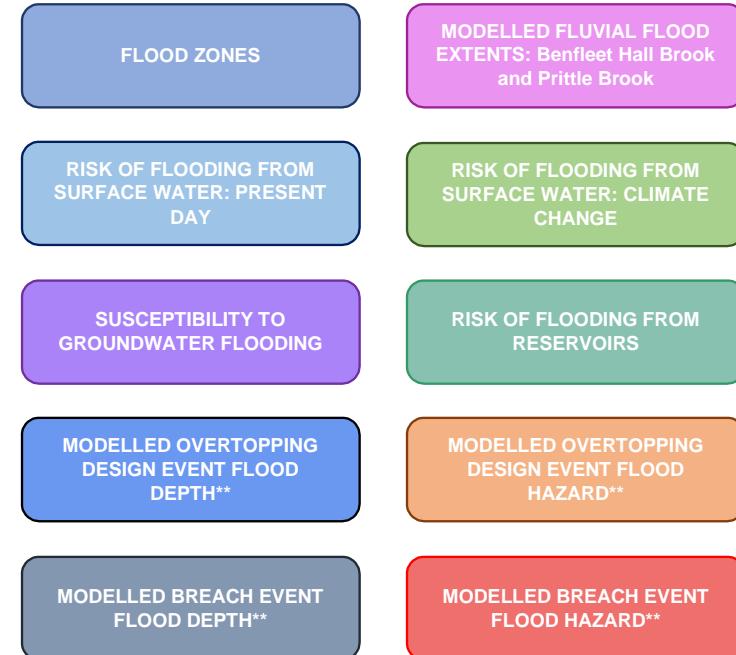

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: <1 hour FROM BREACH LOCATION(S): CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):


WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40273	Allocation Number	C8(b)	Site Name	Venables Close Cluster
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. An unnamed Ordinary Watercourse which is a tributary of Leigh Beck flows south through the centre of the site (as shown on the OS Watercourse layer). Leigh Beck is located approximately 6m south of the site and flows south into the Thames Estuary. This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (92%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Significant' hazard (Danger for Most) with the north of the site as 'Low' to 'Moderate' hazard (Caution to Danger for Some). The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS06 is approximately 2.7m AOD. Ground levels are approximately 1.4m AOD in the south of the site and 2.4m AOD in the north of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the site is at low to medium risk of flooding from surface water which is associated with the Ordinary Watercourse through the site. When taking climate change into account, this risk increases with a small area of high risk (2%) in the centre of the site. The access route to the north on the High Street is at low to medium risk of surface water flooding.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>55 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The unnamed Ordinary Watercourse which flows through the site may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).</li> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 and CAS06 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing. Development should be sequentially located away from the surface water flow path where possible.</li> </ul>					

- Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.
- As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.

SITE REFERENCE: 10010 ALLOCATION NUMBER: C8(c) CLUSTER: Canvey TC SITE AREA: 0.13 ha

SITE NAME: Canvey Job Centre

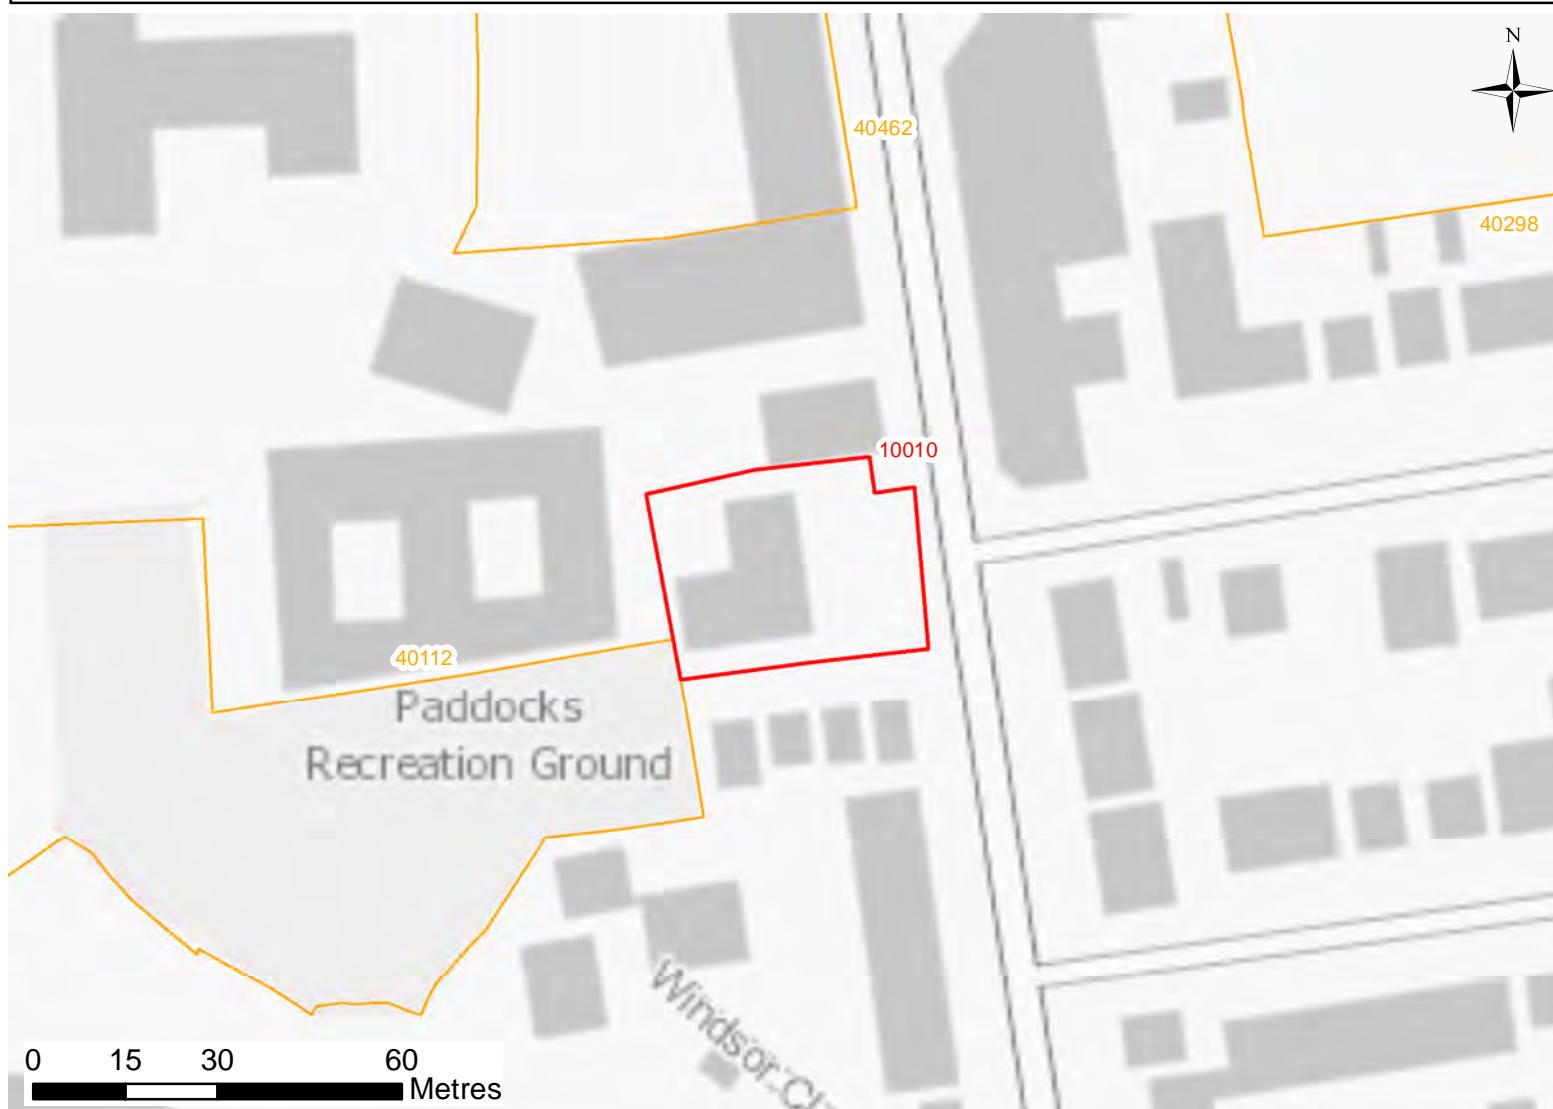

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 13

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island south

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 276m

PROXIMITY TO NEAREST WATERCOURSE: 220m

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

134 records in Postcode Area SS8 7

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING


0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

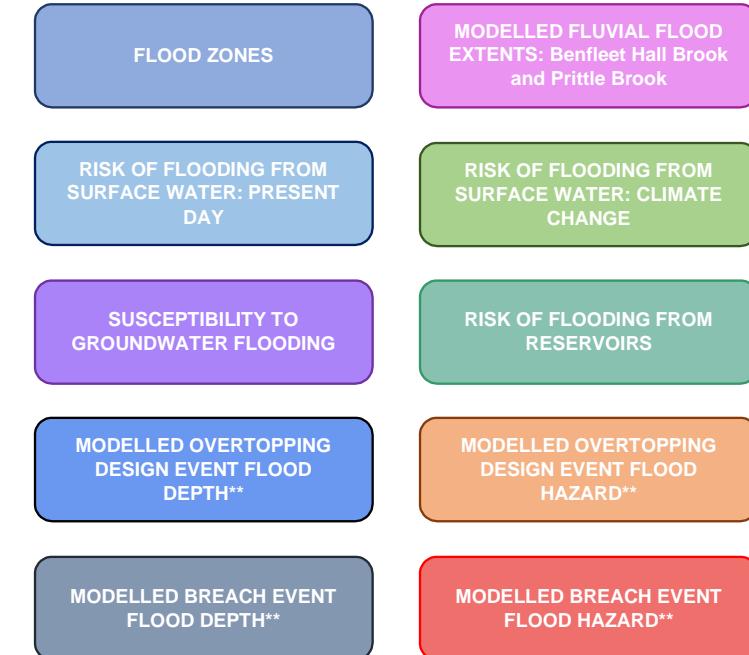

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS08

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%	WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%
----------------------------------	---

Site Reference	10010	Allocation Number	C8(c)	Site Name	Canvey Job Centre
<b>Flood Risk Summary</b>					
The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.					
Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Low' hazard (Caution) with the edges of the site (east and west) as 'Moderate' hazard (Danger to Some). The maximum flood depth during this event is between 0 and 0.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.6m AOD. Ground levels are approximately 2.3m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.					
The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding.					
The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.					
<b>Site Specific Recommendations</b>					
13 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40276 ALLOCATION NUMBER: C15 CLUSTER: Canvey SITE AREA: 2.648 ha

SITE NAME: Land at The Point

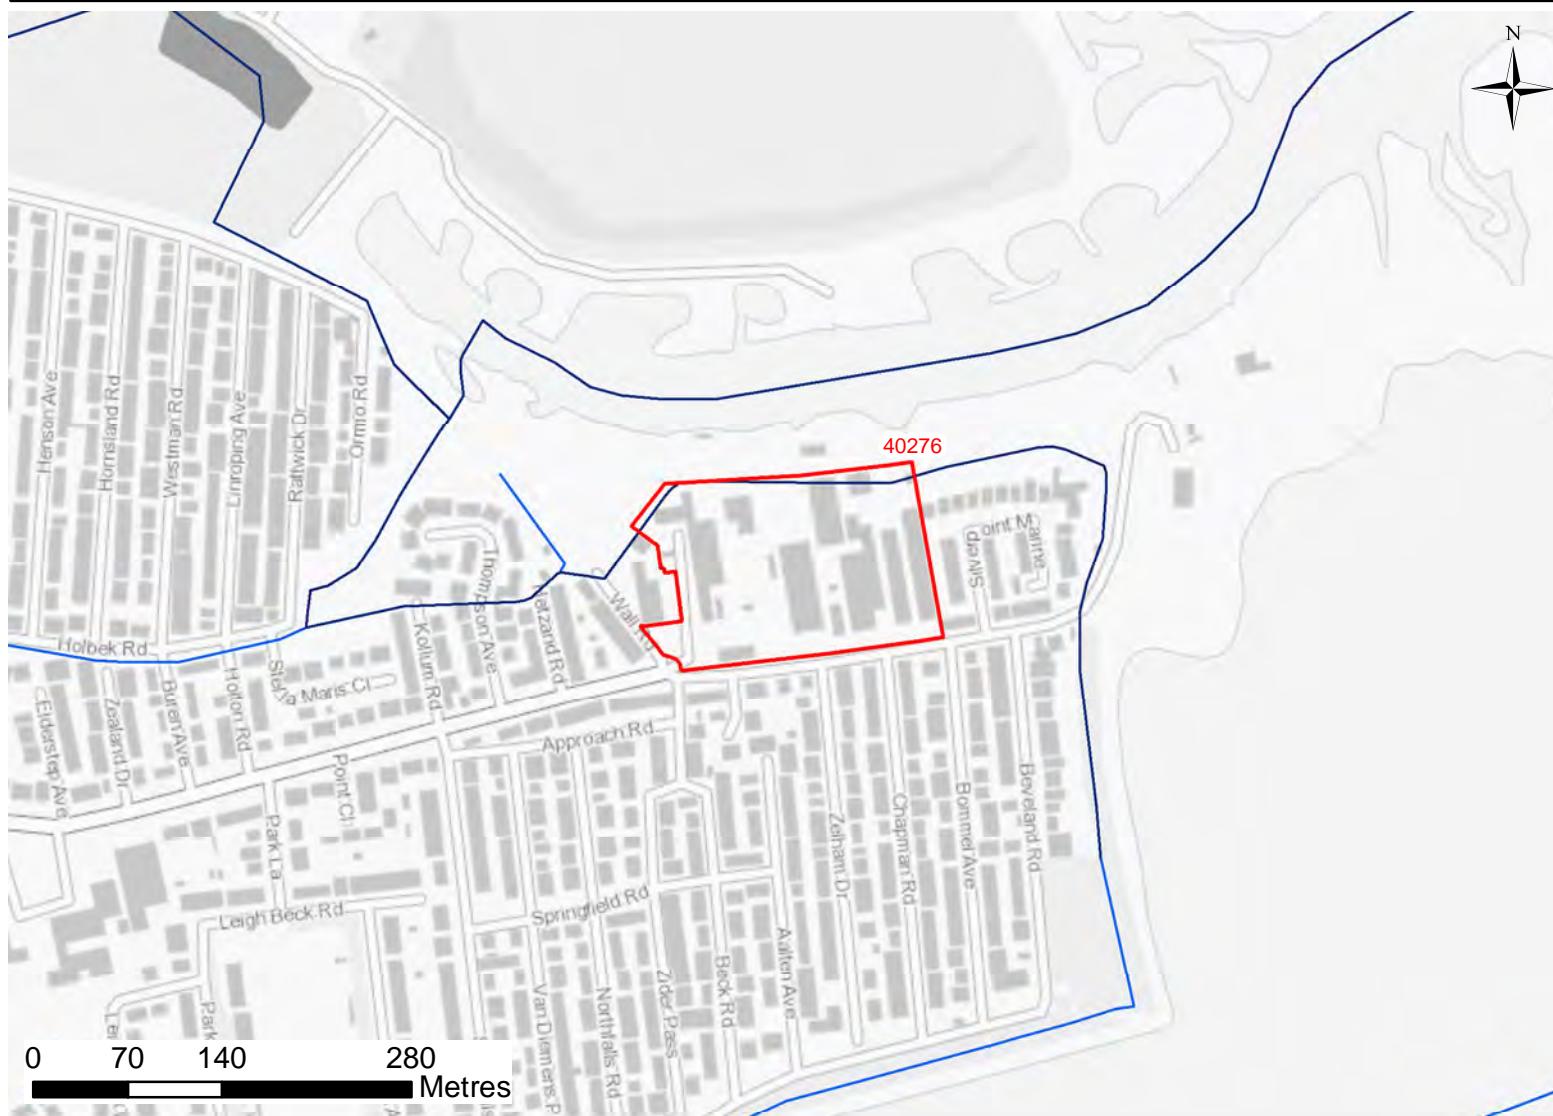

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

**PROPOSED UNITS:** 172

**VULNERABILITY CLASSIFICATION:** More Vulnerable

**FLOOD ZONES AND HISTORIC FLOODING**

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

**FLOOD WARNING AREA:** Canvey Island south

**RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED:** 1953 Coast Flood Outline Essex

**PROXIMITY TO MAIN RIVER:** Located on edge of site boundary **PROXIMITY TO NEAREST WATERCOURSE:** 56m

**ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA**

134 records in Postcode Area SS8 7

**FLUVIAL FLOODING**

**% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE):** 0%

**SURFACE WATER FLOODING**


0.1% AEP:	7%	1% AEP:	3%	3.33%:	3%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	9%	1% AEP + 40% Climate Change:	4%	3.33% AEP + 40% Climate Change:	6%
--------------------------------	----	------------------------------	----	---------------------------------	----

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

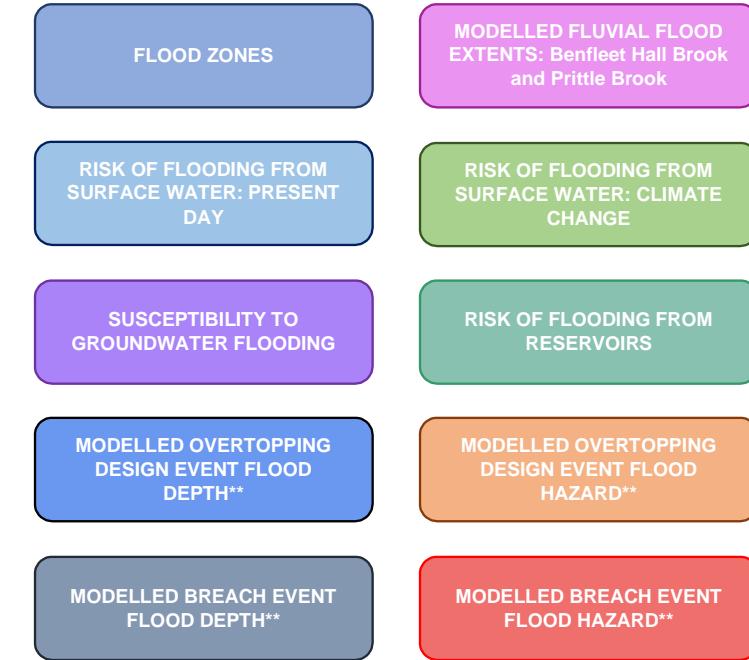

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

**BEDROCK GEOLOGY:** London Clay Formation

**SUPERFICIAL GEOLOGY:** Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK OF FLOODING:** 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK FROM FLOODING:** 97%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

**FASTEST TIME TO INUNDATION:** <1 hour

**FROM BREACH LOCATION(S):** CAS05

### RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

#### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%
-------------------------------	----

WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
--	----


Site Reference	40276	Allocation Number	C15 <th>Site Name</th> <td>Land at The Point</td>	Site Name	Land at The Point
<b>Flood Risk Summary</b>					
<p>The site is located in the south east of Canvey Island. An unnamed tributary (Main River) of Smallgains Creek flows west along the northern boundary of the site (as shown on the Environment Agency's Statutory Main River Map), before flowing east out to the Thames Estuary. This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the majority of the site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is at 'Significant' hazard (Danger for Most) with a small area to the north which is not at risk of flooding. The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 3.1m AOD. Ground levels are approximately 2m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The site is located within the Leigh Beck Critical Drainage Area. The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding. There are some small areas of low to high surface water flood risk towards the site boundary which increases when taking climate change into account. The access route to the west on Point Road is at medium to high risk of surface water flooding.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding.</p> <p>The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>172 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>• A 19m wide undeveloped buffer strip should be retained from the tidal flood defences to the north of the site at Smallgains Marina. New development within 19m of the tidal flood defences will require consent from the Environment Agency (guidance on Environment Agency Flood Risk Activity Permits is available online <a href="https://www.gov.uk/guidance/flood-risk-activities-environmental-permits">https://www.gov.uk/guidance/flood-risk-activities-environmental-permits</a>).</li> <li>• The unnamed Environment Agency Main River which flows through the site may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide undeveloped buffer strip should be retained alongside the watercourse and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of a Main River will require consent from the Environment Agency.</li> <li>• The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 3.3m AOD.</li> <li>• The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>• Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					

**Surface Water**

- Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.
- Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.
- As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.

SITE REFERENCE: 40082	ALLOCATION NUMBER: C16(a)	CLUSTER: Canvey	SITE AREA: 0.106 ha
-----------------------	---------------------------	-----------------	---------------------

SITE NAME: Formal Admiral Jellicoe, High Street

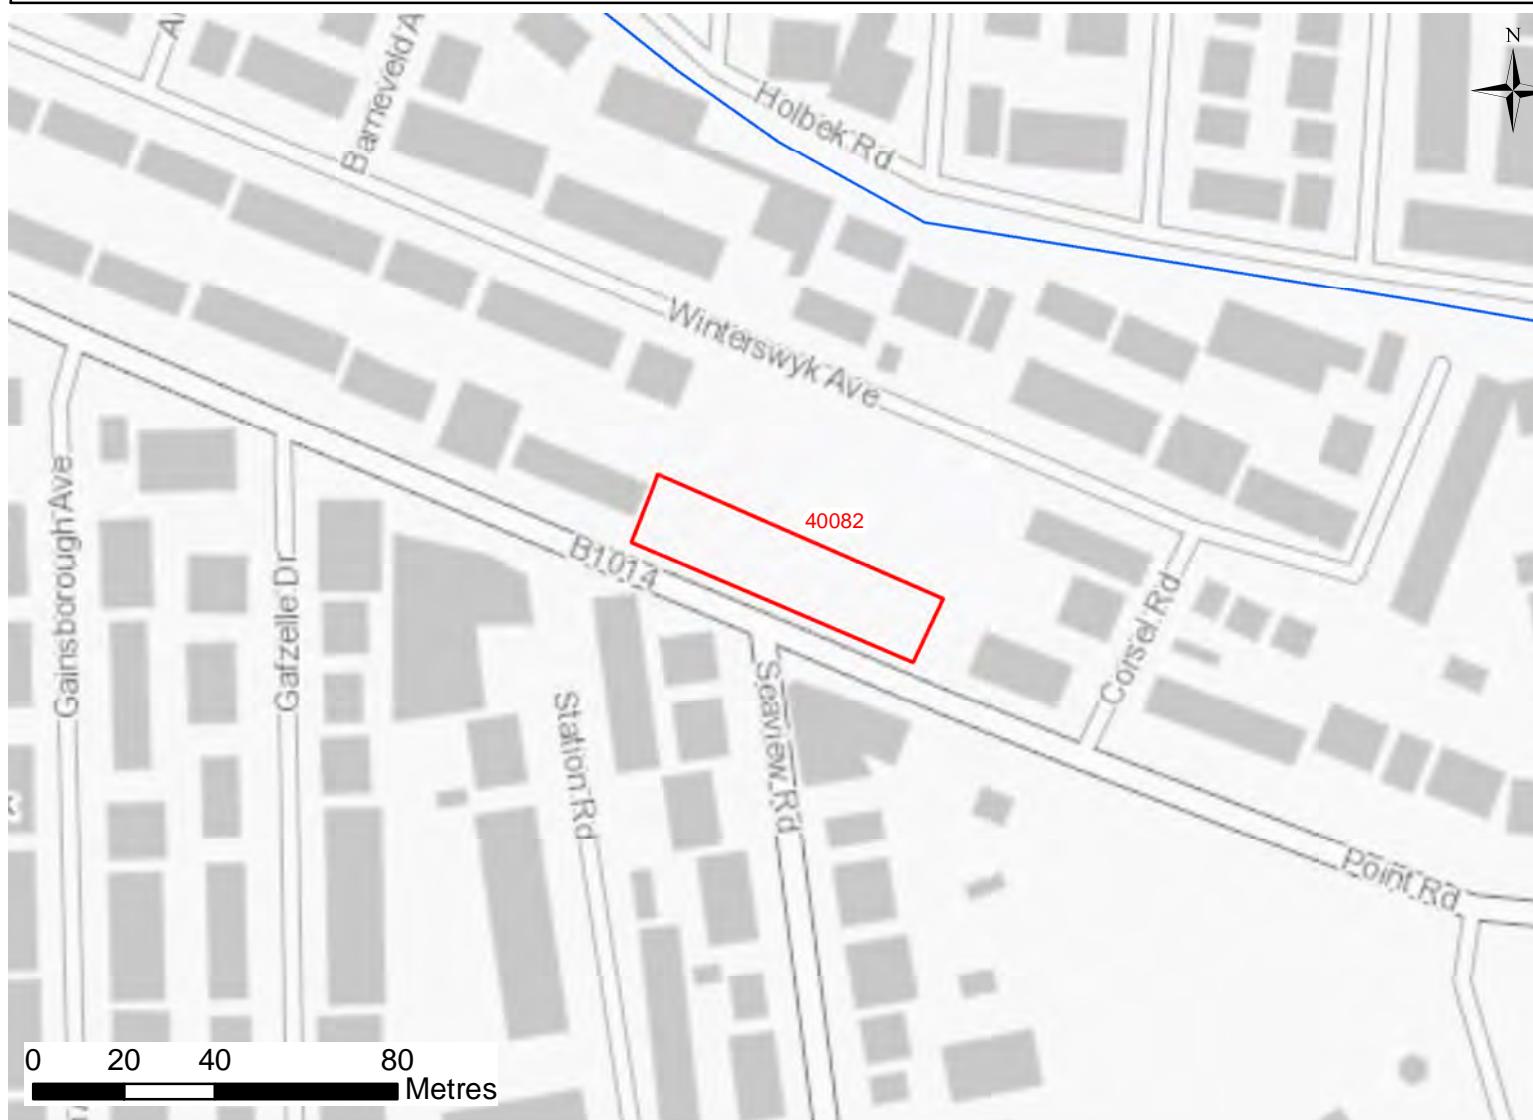

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.


PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

<b>PROPOSED UNITS:</b> 7					
<b>VULNERABILITY CLASSIFICATION:</b> More Vulnerable					
<b>FLOOD ZONES AND HISTORIC FLOODING</b>					
Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%		
Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%		
<b>FLOOD WARNING AREA:</b> Canvey Island south					
<b>RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED:</b> 1953 Coast Flood Outline Essex					
<b>PROXIMITY TO MAIN RIVER:</b> 249m		<b>PROXIMITY TO NEAREST WATERCOURSE:</b> 74m			
<b>ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA</b>					
101 and 134 records in Postcode Area SS8 8 and SS8 7, respectively					
<b>FLUVIAL FLOODING</b>					
<b>% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE):</b> 0%					
<b>SURFACE WATER FLOODING</b>					
0.1% AEP:	0%	1% AEP:	0%		
0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%		
3.33% AEP:	0%	3.33% AEP + 40% Climate Change:	0%		

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

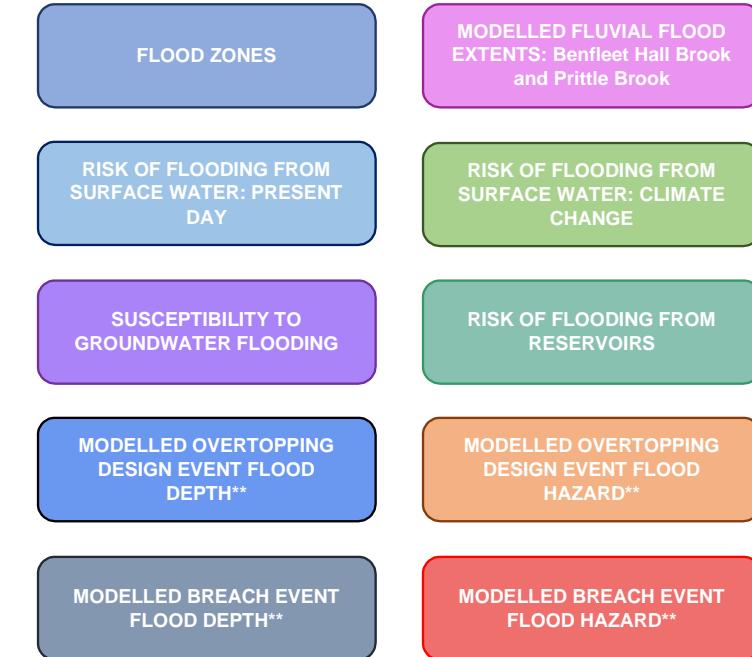

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

**BEDROCK GEOLOGY:** London Clay Formation

**SUPERFICIAL GEOLOGY:** Tidal Flat Deposits

### BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

### TIDAL FLOODING

#### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK OF FLOODING:** 0%

#### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK FROM FLOODING:** 100%

#### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

**FASTEST TIME TO INUNDATION:** <1 hour **FROM BREACH LOCATION(S):** CAS05

#### RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

##### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):


**WHEN RIVER LEVELS ARE NORMAL:** 0%

**WHEN THERE IS ALSO FLOODING FROM RIVERS:** 0%

Site Reference	40082	Allocation Number	C16(a) <th>Site Name</th> <td>Former Admiral Jellicoe, High Street</td>	Site Name	Former Admiral Jellicoe, High Street
<b>Flood Risk Summary</b>					
<p>The site is located in the south east of Canvey Island. An unnamed tributary of Smallgains Creek lies to the north of the site at a distance of approximately 74m (as shown on the OS Watercourse layer). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The entire site is at 'Significant' hazard (Danger for Most). The maximum flood depth on the site during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 3.0m AOD. Ground levels are approximately 2.3m AOD across most of the site with levels of approximately 1.8m AOD in the centre of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The site is located within the Leigh Beck Critical Drainage Area. The modelled surface water risk mapping indicates the site is at very low risk of flooding from surface water. The access route to the north on the High Street is at low to medium risk of surface water flooding.</p>					
<p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding.</p>					
<p>The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>7 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 3.1m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 40125 ALLOCATION NUMBER: C16(b) CLUSTER: Canvey SITE AREA: 0.404 ha

SITE NAME: Land to the rear of North Avenue

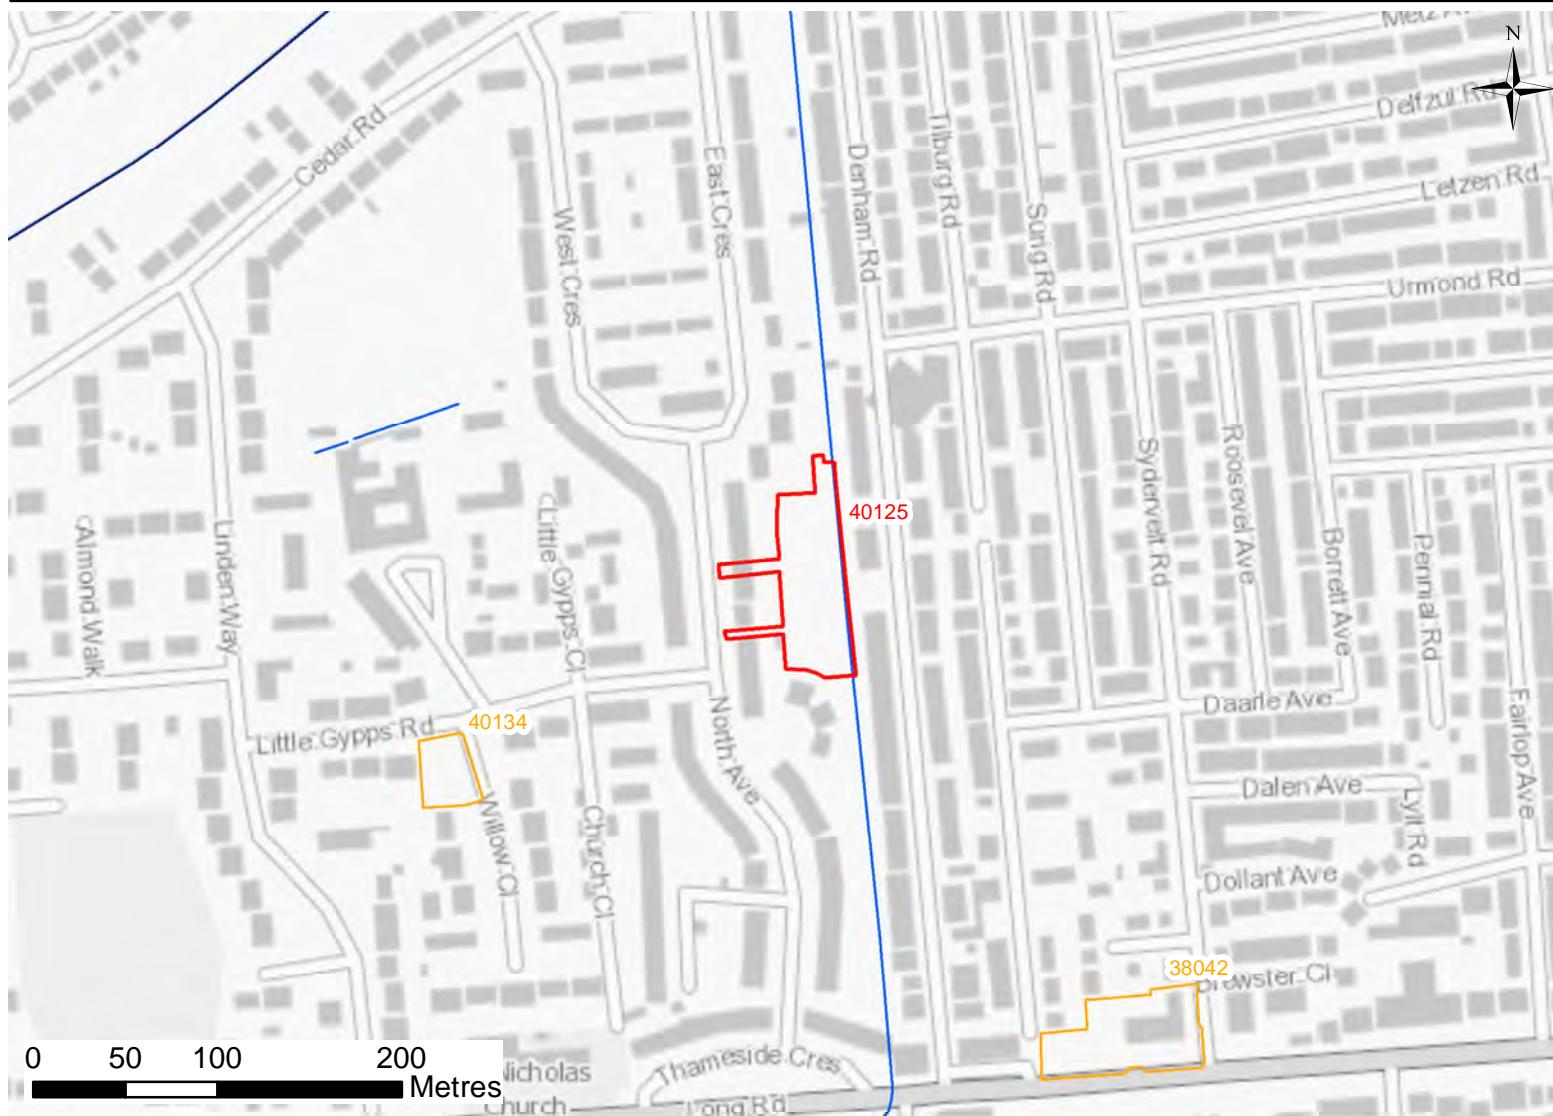

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

PROPOSED UNITS: 21

VULNERABILITY CLASSIFICATION: More Vulnerable

FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 353m

PROXIMITY TO NEAREST WATERCOURSE: Located on edge of site boundary

ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

228 records in Postcode Area SS8 9

FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

SURFACE WATER FLOODING

0.1% AEP:	4%	1% AEP:	0%	3.33%:	3%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	9%	1% AEP + 40% Climate Change:	1%	3.33% AEP + 40% Climate Change:	6%
--------------------------------	----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

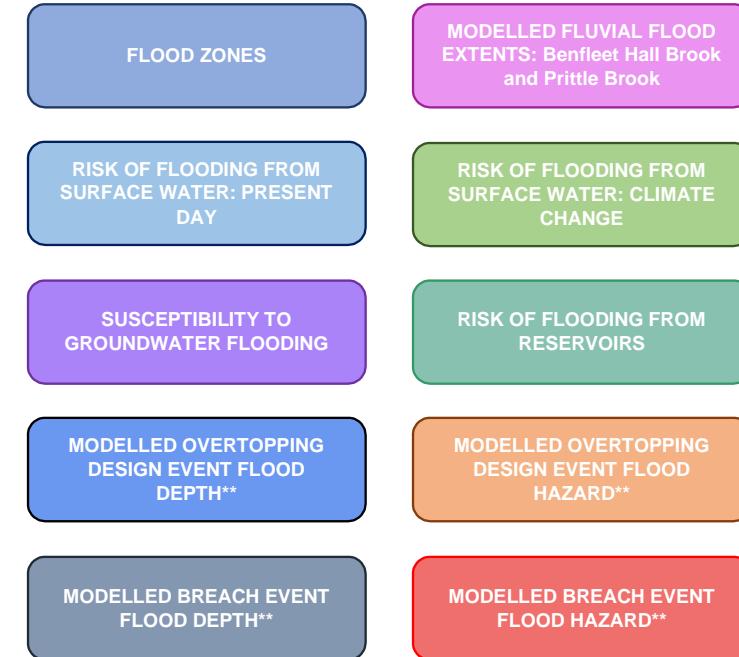

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS02, CAS03, CAS04, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):


WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40125	Allocation Number	C16(b) <th>Site Name</th> <td>Land to the rear of North Avenue</td>	Site Name	Land to the rear of North Avenue
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. An unnamed Ordinary Watercourse flows south along the eastern boundary of the site (as shown on the OS Watercourse layer), before flowing south into Thorneycreek Fleet and out to the Thames Estuary. This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. 87% of the site is shown to be within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The west of the site is 'Significant' hazard (Danger for Most) with the east of the site at 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS03 is approximately 2.2m AOD. Ground levels are approximately 1.6m AOD to 1.9m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding with a small area to the south of the site boundary at low to high risk of surface water flooding which increases slightly with climate change. The map indicates the local road network may be susceptible to low to medium risk surface water ponding.</p>					
<p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>21 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The unnamed Ordinary Watercourse which flows through the site may be culverted and should therefore be investigated further as part of a site specific Flood Risk Assessment. An 8m wide buffer strip should be retained alongside Ordinary Watercourses and opportunities should be explored for riverside restoration and deculverting (where applicable). New development within 8m of an Ordinary Watercourse will require consent from Essex County Council (as LLFA).</li> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS03 is approximately 2.3m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> </ul>					

- Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.

SITE REFERENCE: 40231 ALLOCATION NUMBER: C16(c) CLUSTER: Canvey TC SITE AREA: 0.19 ha

SITE NAME: Essex Coachworks, 218 High Street

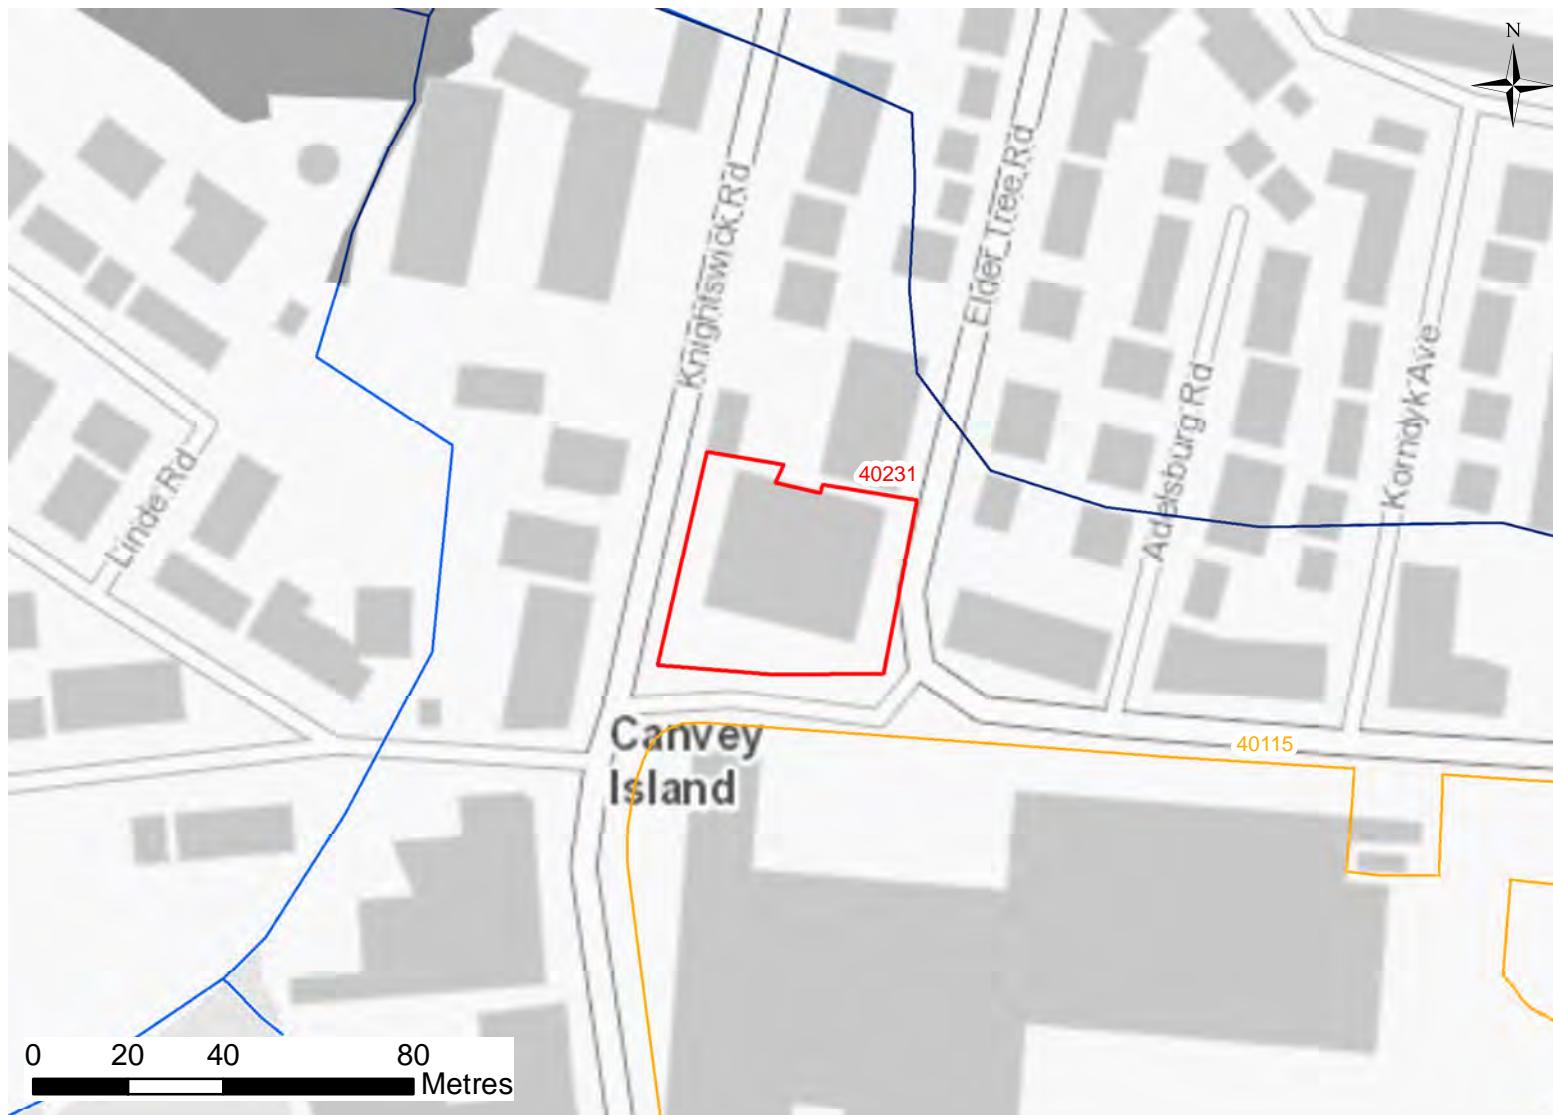

PROPOSED UNITS: 19

VULNERABILITY CLASSIFICATION: More Vulnerable

#### FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 47m

PROXIMITY TO NEAREST WATERCOURSE: 16m

#### ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

101 and 134 records in Postcode Area SS8 8 and SS8 7, respectively

#### FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

#### SURFACE WATER FLOODING

0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----

#### Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

#### Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

- |  |  |
|--|--|
| FLOOD ZONES                                      | MODELED FLUVIAL FLOOD EXTENTS: Benfleet Hall Brook and Prittle Brook |
| RISK OF FLOODING FROM SURFACE WATER: PRESENT DAY | RISK OF FLOODING FROM SURFACE WATER: CLIMATE CHANGE                  |
| SUSCEPTIBILITY TO GROUNDWATER FLOODING           | RISK OF FLOODING FROM RESERVOIRS                                     |
| MODELED OVERTOPPING DESIGN EVENT FLOOD DEPTH**   | MODELED OVERTOPPING DESIGN EVENT FLOOD HAZARD**                      |
| MODELED BREACH EVENT FLOOD DEPTH**               | MODELED BREACH EVENT FLOOD HAZARD**                                  |

#### EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

#### GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

#### BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

#### TIDAL FLOODING

#### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

#### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

#### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: <1 hour FROM BREACH LOCATION(S): CAS06

#### RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


#### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%	WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%
----------------------------------	---

Site Reference	40231	Allocation Number	C16(c)	Site Name	Essex Coachworks, 218 High Street
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. An unnamed watercourse lies to the north of the site at a distance of approximately 16m which flows west into Canvey Lake site (as shown on the Environment Agency's Statutory Main River Map). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Significant' hazard (Danger for Most) with a small area to the south east as 'Low' to 'Moderate' hazard (Caution to Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS06 is approximately 2.6m AOD. Ground levels are approximately 2.5m AOD to the south of the site and 1.8m AOD to the north of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>19 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS06 is approximately 2.7m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE REFERENCE: 38042 ALLOCATION NUMBER: C16(d) CLUSTER: Canvey SITE AREA: 0.322 ha

SITE NAME: Former Council Offices, Long Road

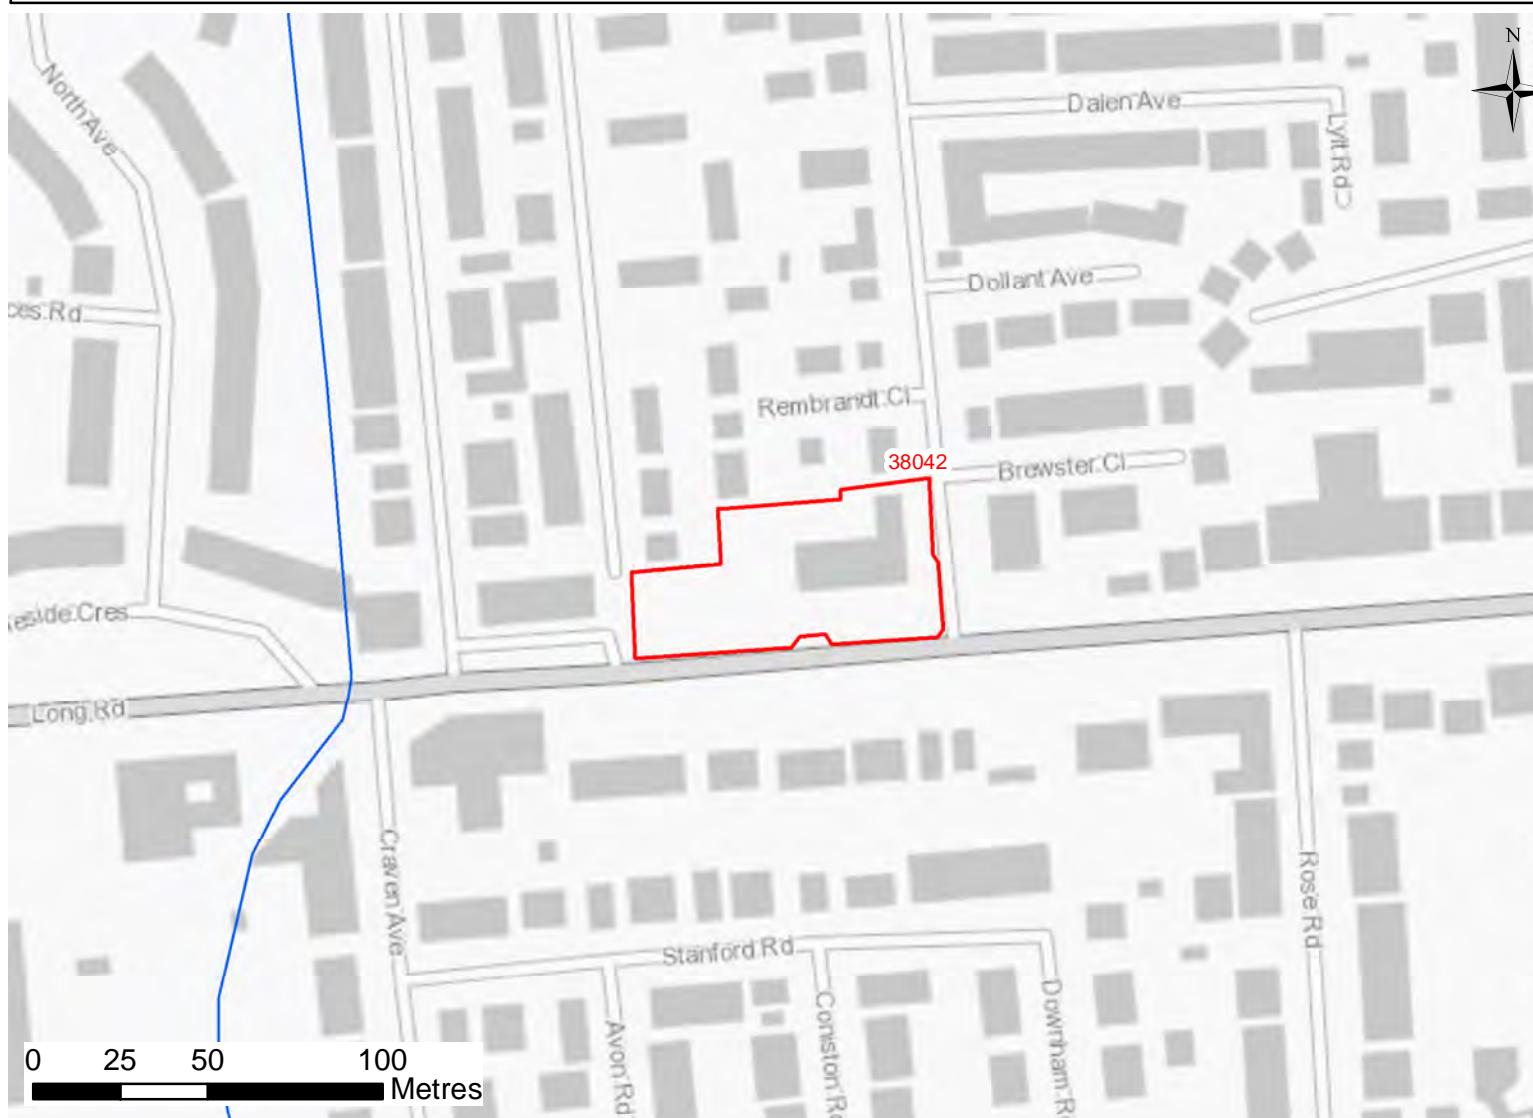

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

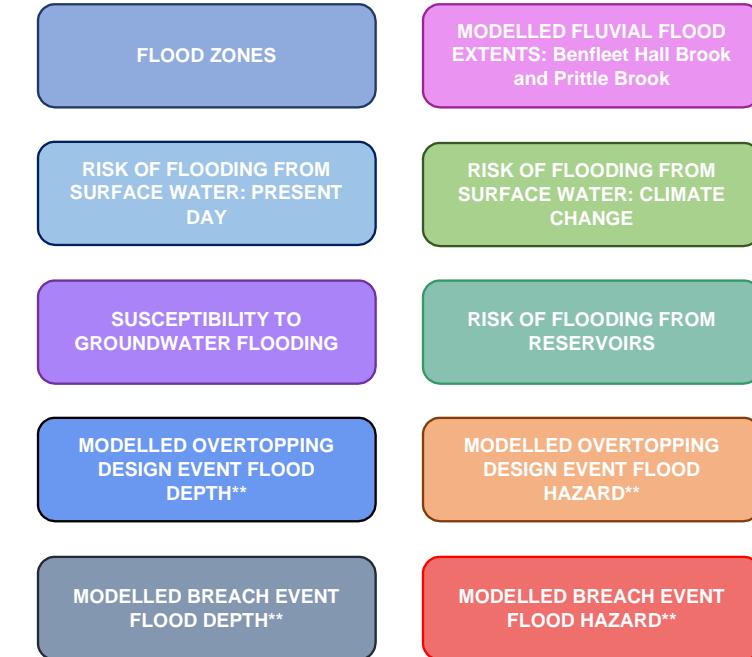

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS02, CAS03, CAS04, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%	WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%
----------------------------------	---

PROPOSED UNITS: 32

VULNERABILITY CLASSIFICATION: More Vulnerable

## FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP): 0%	Flood Zone 2 (0.1% AEP): 0%	Flood Zone 3a (1% AEP): 100%	Flood Zone 3b (defined in SFRA report): 0%
------------------------------	-----------------------------	------------------------------	--

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 503m

PROXIMITY TO NEAREST WATERCOURSE: 81m

## ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

228 and 90 records in Postcode Area SS8 9 and SS8 0, respectively

## FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

## SURFACE WATER FLOODING

0.1% AEP: 0%	1% AEP: 0%	3.33%: 0%
--------------	------------	-----------

0.1% AEP + 40% Climate Change: 1%	1% AEP + 40% Climate Change: 0%	3.33% AEP + 40% Climate Change: 0%
-----------------------------------	---------------------------------	------------------------------------

Site Reference	38042	Allocation Number	C16(d) <th>Site Name</th> <td>Former Council Offices, Long Rd</td>	Site Name	Former Council Offices, Long Rd
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. An unnamed watercourse lies to the west of the site at a distance of approximately 81m and flows south, before flowing south into Thorneycreek Fleet and out to the Thames Estuary (as shown on the OS Watercourse layer). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The west of the site is 'Significant' hazard (Danger for Most) with the rest of the site as 'Low' to 'Moderate' hazard (Caution to Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS03 is approximately 2.3m AOD. Ground levels are approximately 1.8m AOD to 2.0m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p> <p>The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water. The access route along Long Road is also at very low risk of flooding from surface water.</p> <p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>32 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>• The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS03 is approximately 2.3m AOD.</li> <li>• The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>• Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>• Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>• Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40134 ALLOCATION NUMBER: C16(e) CLUSTER: Canvey SITE AREA: 0.107 ha

SITE NAME: Corner of Little Gypps Road and Willow Close



Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

FLOOD ZONES

MODELED FLUVIAL FLOOD EXTENTS: Benfleet Hall Brook and Prittle Brook

RISK OF FLOODING FROM SURFACE WATER: PRESENT DAY

RISK OF FLOODING FROM SURFACE WATER: CLIMATE CHANGE

SUSCEPTIBILITY TO GROUNDWATER FLOODING

RISK OF FLOODING FROM RESERVOIRS

MODELED OVERTOPPING DESIGN EVENT FLOOD DEPTH\*\*

MODELED OVERTOPPING DESIGN EVENT FLOOD HAZARD\*\*

MODELED BREACH EVENT FLOOD DEPTH\*\*

MODELED BREACH EVENT FLOOD HAZARD\*\*

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

PROPOSED UNITS: 7

VULNERABILITY CLASSIFICATION: More Vulnerable

## FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 348m

PROXIMITY TO NEAREST WATERCOURSE: 166m

## ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

228 records in Postcode Area SS8 9

## FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

## SURFACE WATER FLOODING

0.1% AEP:	1%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	3%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS02, CAS03, CAS04, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


% OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%	WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%
----------------------------------	---

Site Reference	40134	Allocation Number	C16(e)	Site Name	Corner of Little Gypps Rd & Willow Cl
<b>Flood Risk Summary</b>					
The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.					
Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The centre of the site is 'Significant' hazard (Danger for Most) with the south west of the site as 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS03 is approximately 2.3m AOD. Ground levels are approximately 1.8m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.					
The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding with a small area on the eastern boundary at low risk. The map indicates the local road network may be susceptible to low risk surface water ponding.					
The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.					
<b>Site Specific Recommendations</b>					
7 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS03 is approximately 2.3m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40130	ALLOCATION NUMBER: C16(f)	CLUSTER: Canvey	SITE AREA: 0.189 ha
-----------------------	---------------------------	-----------------	---------------------

SITE NAME: Ozonia Gardens, Eastern Esplanade

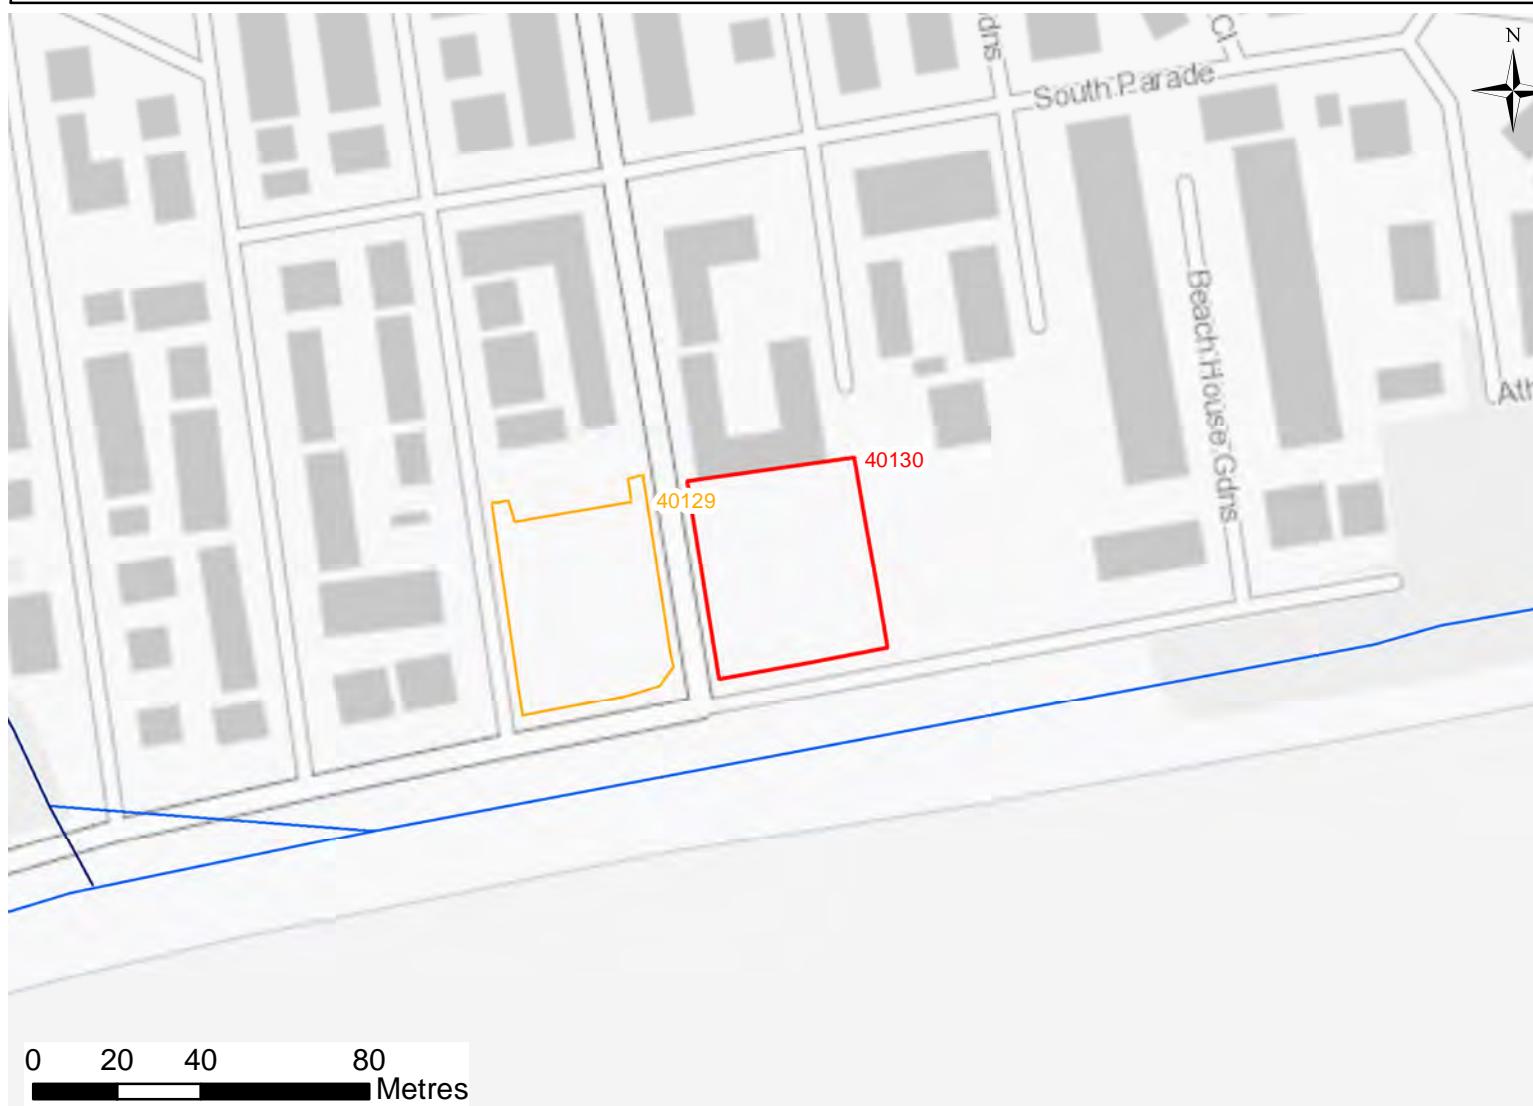

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

**PROPOSED UNITS:** 12

**VULNERABILITY CLASSIFICATION:** More Vulnerable

**FLOOD ZONES AND HISTORIC FLOODING**

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

**FLOOD WARNING AREA:** Canvey Island south

**RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED:** 1953 Coast Flood Outline Essex

**PROXIMITY TO MAIN RIVER:** 157m

**PROXIMITY TO NEAREST WATERCOURSE:** 20m

**ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA**

134 records in Postcode Area SS8 7

**FLUVIAL FLOODING**

**% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE):** 0%

**SURFACE WATER FLOODING**


0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	4%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----

## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

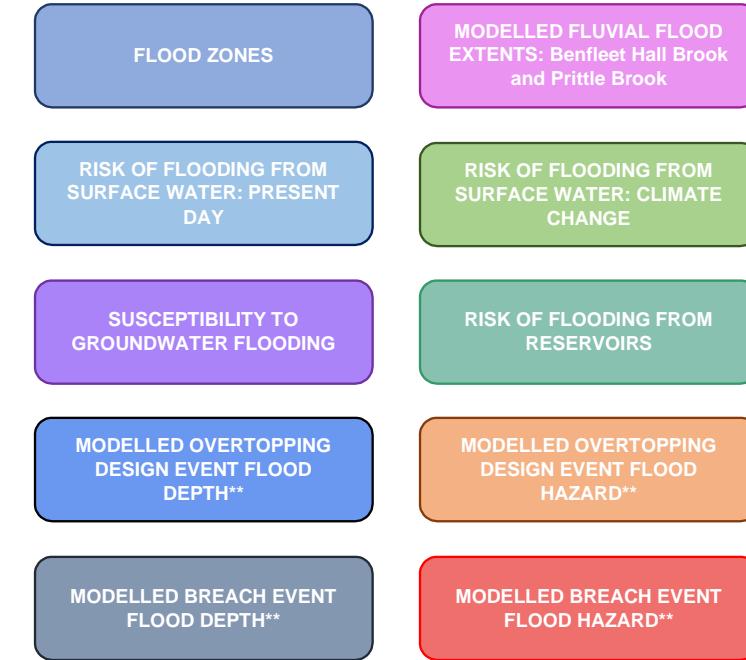

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

**BEDROCK GEOLOGY:** London Clay Formation

**SUPERFICIAL GEOLOGY:** Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK OF FLOODING:** 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK FROM FLOODING:** 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

**FASTEST TIME TO INUNDATION:** <1 hour **FROM BREACH LOCATION(S):** CAS05

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL:	0%	WHEN THERE IS ALSO FLOODING FROM RIVERS:	0%
-------------------------------	----	--	----

Site Reference	40130	Allocation Number	C16(f)	Site Name	Ozonia Gardens, Eastern Esplanade
<b>Flood Risk Summary</b>					
<p>The site is located in the south east of Canvey Island. An unnamed watercourse lies to the south of the site at a distance of approximately 20m which flows to the west and into the Thames Estuary (as shown on the OS Watercourse layer). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Extreme' hazard (Danger for All) with a small area to the north as 'Significant' hazard (Danger for Most). The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 3.0m AOD. Ground levels are approximately 1.6m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The modelled surface water risk mapping indicates the majority of the site is at very low risk of surface water flooding with only a small area in the south west corner at low risk when taking climate change into account (4%). The access route to the west along the Esplanade is at high risk of surface water flooding and Seaview Road to the north is at low risk of surface water flooding.</p>					
<p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>12 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 3.2m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 40129	ALLOCATION NUMBER: C16(g)	CLUSTER: Canvey	SITE AREA: 0.171 ha
-----------------------	---------------------------	-----------------	---------------------

SITE NAME: Land between Station Road and Seaview Road

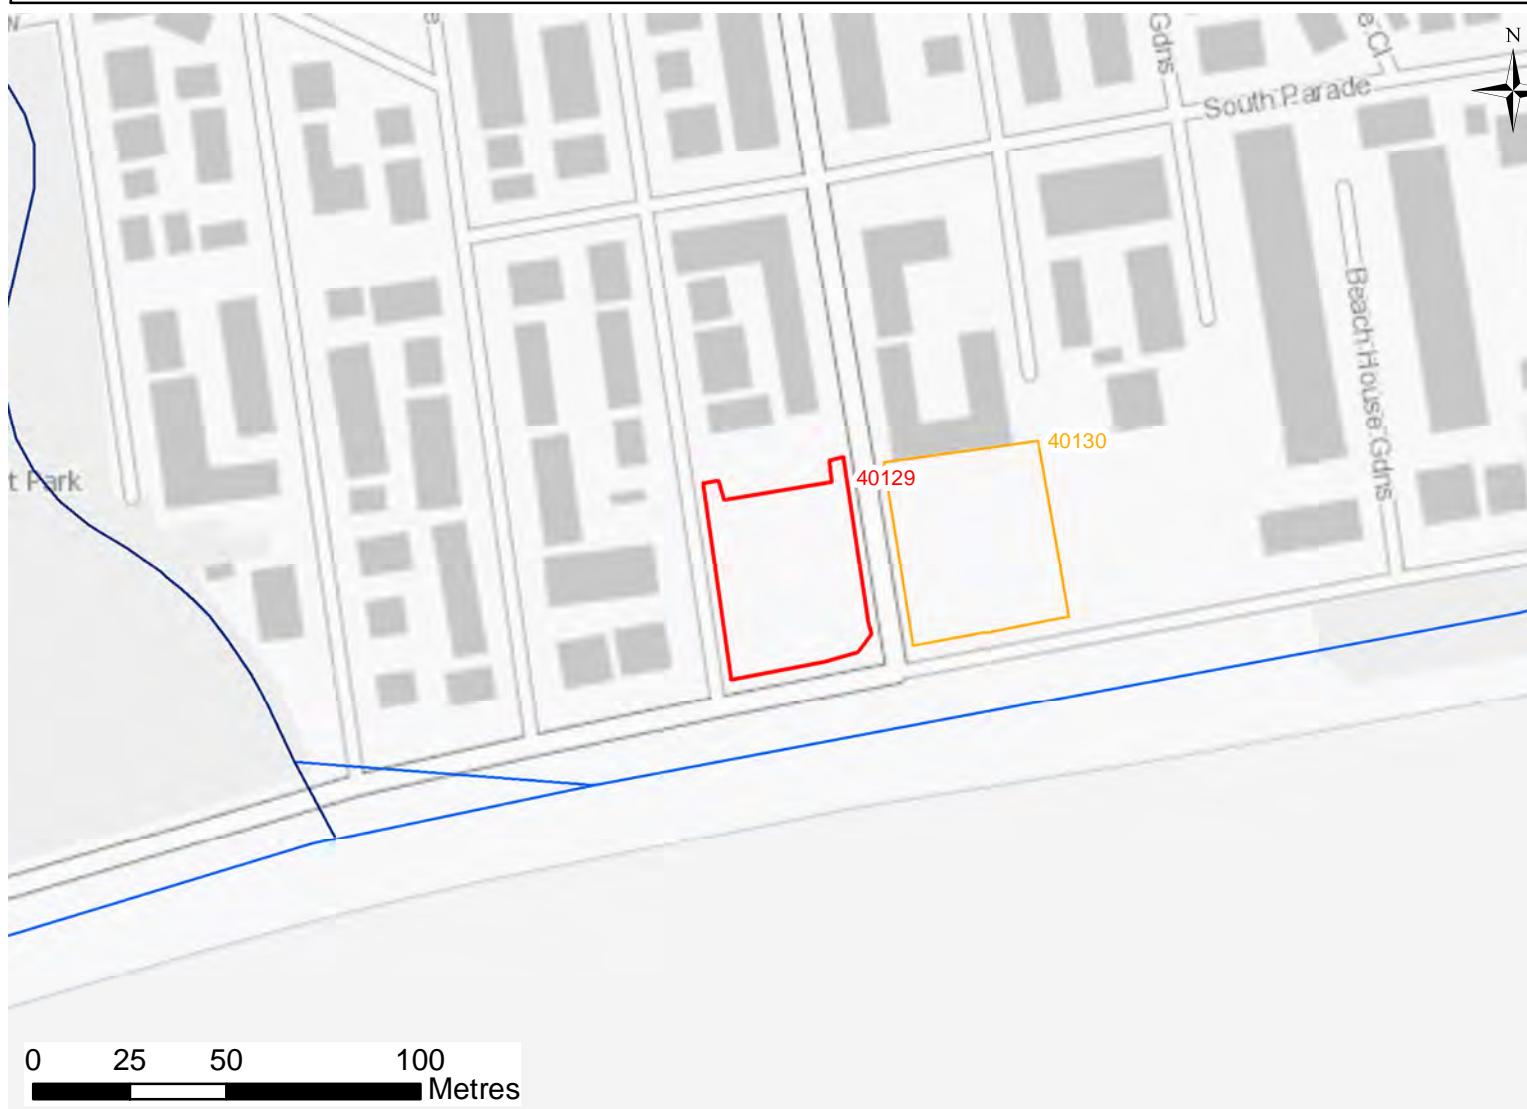

Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

**PROPOSED UNITS:** 11

**VULNERABILITY CLASSIFICATION:** More Vulnerable

**FLOOD ZONES AND HISTORIC FLOODING**

Flood Zone 1 (<0.1% AEP): 0%	Flood Zone 2 (0.1% AEP): 0%	Flood Zone 3a (1% AEP): 100%	Flood Zone 3b (defined in SFRA report): 0%
------------------------------	-----------------------------	------------------------------	--

**FLOOD WARNING AREA:** Canvey Island south

**RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED:** 1953 Coast Flood Outline Essex

**PROXIMITY TO MAIN RIVER:** 110m

**PROXIMITY TO NEAREST WATERCOURSE:** 20m

**ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA**

134 records in Postcode Area SS8 7

**FLUVIAL FLOODING**

**% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE):** 0%

**SURFACE WATER FLOODING**

0.1% AEP: 0%	1% AEP: 0%	3.33%: 0%
--------------	------------	-----------

0.1% AEP + 40% Climate Change: 0%	1% AEP + 40% Climate Change: 0%	3.33% AEP + 40% Climate Change: 0%
-----------------------------------	---------------------------------	------------------------------------


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

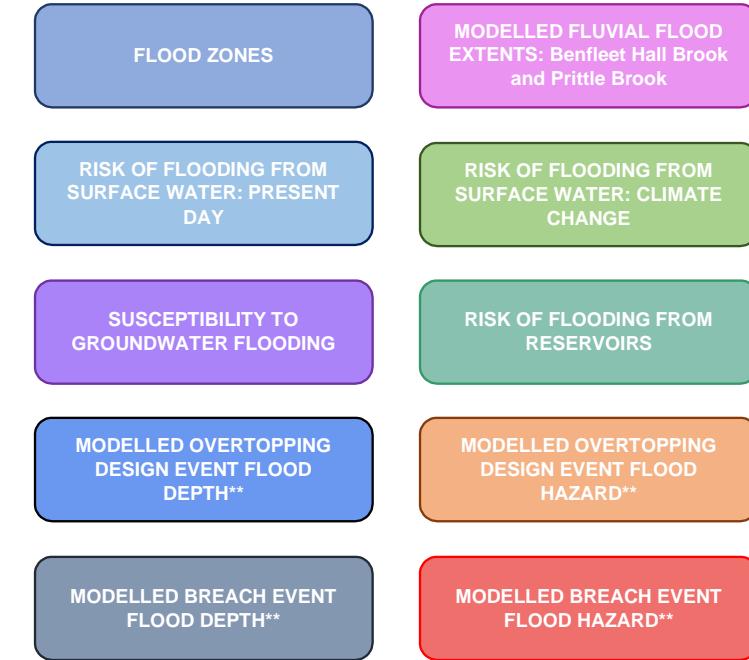

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

**BEDROCK GEOLOGY:** London Clay Formation

**SUPERFICIAL GEOLOGY:** Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK OF FLOODING:** 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK FROM FLOODING:** 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

**FASTEST TIME TO INUNDATION:** <1 hour **FROM BREACH LOCATION(S):** CAS05

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

<b>WHEN RIVER LEVELS ARE NORMAL:</b> 0%	<b>WHEN THERE IS ALSO FLOODING FROM RIVERS:</b> 0%
---	--

Site Reference	40129	Allocation Number	C16(g)	Site Name	Land between Station Rd & Seaview Rd
<b>Flood Risk Summary</b>					
<p>The site is located in the south east of Canvey Island. An unnamed watercourse lies to the south of the site at a distance of approximately 20m which flows to the west and into the Thames Estuary (as shown on the OS Watercourse layer). This watercourse may be culverted. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Extreme' hazard (Danger for All) with a small area to the north as 'Significant' hazard (Danger for Most). The maximum flood depth during this event is between 1 and 1.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 3.0m AOD. Ground levels are approximately 1.7m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the west along the Esplanade is at high risk of surface water flooding and Seaview Road to the north is at low risk of surface water flooding. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>11 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>• The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 3.2m AOD.</li> <li>• The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>• Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>• Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>• Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> </ul>					

SITE REFERENCE: 39880 ALLOCATION NUMBER: C1 CLUSTER: Canvey TC SITE AREA: 0.1 ha

SITE NAME: Matrix House, 12-16 Lionel Road



Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

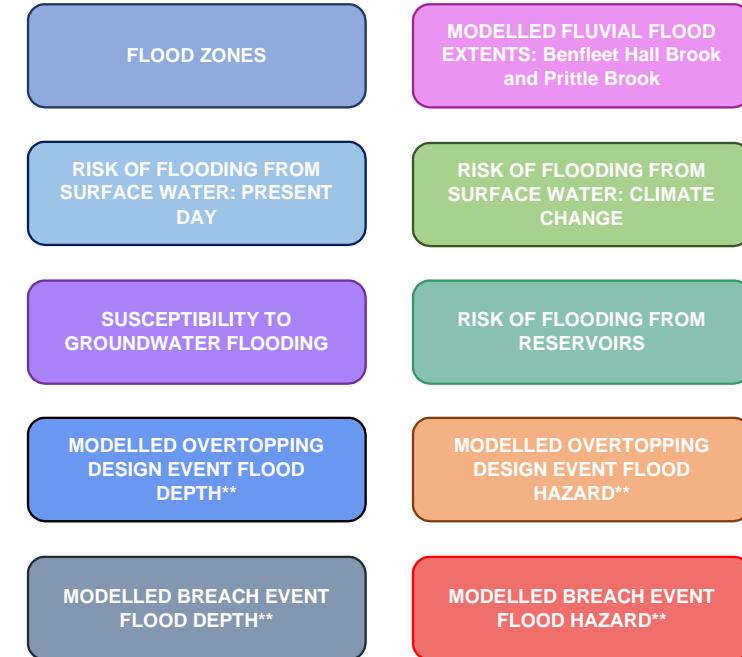

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

BEDROCK GEOLOGY: London Clay Formation

SUPERFICIAL GEOLOGY: Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK OF FLOODING: 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

% OF SITE AT RISK FROM FLOODING: 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

FASTEST TIME TO INUNDATION: 1-4 hours FROM BREACH LOCATION(S): CAS03, CAS05, CAS06

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)

### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):

WHEN RIVER LEVELS ARE NORMAL: 0%	WHEN THERE IS ALSO FLOODING FROM RIVERS: 0%
----------------------------------	---

PROPOSED UNITS: 10

VULNERABILITY CLASSIFICATION: More Vulnerable

## FLOOD ZONES AND HISTORIC FLOODING

Flood Zone 1 (<0.1% AEP): 0%	Flood Zone 2 (0.1% AEP): 0%	Flood Zone 3a (1% AEP): 100%	Flood Zone 3b (defined in SFRA report): 0%
------------------------------	-----------------------------	------------------------------	--

FLOOD WARNING AREA: Canvey Island north

RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED: 1953 Coast Flood Outline Essex

PROXIMITY TO MAIN RIVER: 192m

PROXIMITY TO NEAREST WATERCOURSE: 46m

## ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA

228 and 134 records in Postcode Area SS8 9 and SS8 7, respectively

## FLUVIAL FLOODING

% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE): 0%

## SURFACE WATER FLOODING

0.1% AEP: 20%	1% AEP: 0%	3.33%: 0%
---------------	------------	-----------

0.1% AEP + 40% Climate Change: 17%	1% AEP + 40% Climate Change: 13%	3.33% AEP + 40% Climate Change: 0%
------------------------------------	----------------------------------	------------------------------------

Site Reference	39880	Allocation Number	C1	Site Name	Matrix House, 12-16 Lionel Rd
<b>Flood Risk Summary</b>					
<p>The site is located in the centre of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p> <p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The north of the site is 'Moderate' hazard (Danger to Some) and the south of the site is 'Low' hazard (Caution). The maximum flood depth during this event is between 0 and 0.5m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.4m AOD. Ground levels are approximately 2.2m AOD across the site. Access off Canvey Island is also at risk of flooding from a breach event. The site is located within the North Canvey Island Critical Drainage Area. The modelled surface water risk mapping indicates the majority of the site is at very low risk of flooding from surface water with an area in the north of the site (20%) at low risk. When considering climate change, this area to the north of the site (13%) is at medium risk. The access route to the south on Furtherwick Road is at high risk of surface water flooding and Central Wall Road to the north is at low risk of surface water flooding. The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>10 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b><u>Tidal and Fluvial</u></b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 and CAS06 is approximately 2.5m AOD.</li> <li>The site is located within the 'Canvey Island North' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b><u>Surface Water</u></b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> <li>Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.</li> <li>As the site is located within a Critical Drainage Area, guidance, as specified in the Level 2 SFRA report, must be considered.</li> </ul>					

SITE NAME: Kushi, Furtherwick Road



Contains Environment Agency Information © Environment Agency and database right 2025. Contains BGS Digital Data under licence British Geological Survey 2013/012 © UKRI. Contains OS data © Crown Copyright and database right 2020

\*Fluvial modelling marked with a singular asterisk in the legend identifies the design flood event.

\*\*For tidal modelling, the design event is the 0.5% AEP including a higher central climate change allowance. It should be noted that this is 'actual' risk for the overtopping and 'residual' risk for the breach.

\*\*\*Due to the number of breach scenarios modelled, individual time to inundation breach mapping has not been included within this proforma.

\*\*\*\* Results from two models: South Essex and Canvey Island. The Canvey Island model has superseded the South Essex model across the Canvey Island area.

PLEASE REFER TO THE SFRA REPORT FOR FURTHER DETAIL ON MODELLING DISPLAYED WITHIN THIS PROFORMA

**PROPOSED UNITS:** 8

**VULNERABILITY CLASSIFICATION:** More Vulnerable

**FLOOD ZONES AND HISTORIC FLOODING**

Flood Zone 1 (<0.1% AEP):	0%	Flood Zone 2 (0.1% AEP):	0%	Flood Zone 3a (1% AEP):	100%	Flood Zone 3b (defined in SFRA report):	0%
------------------------------	----	-----------------------------	----	----------------------------	------	--	----

**FLOOD WARNING AREA:** Canvey Island south

**RECORDED FLOOD OUTLINES IN WHICH THE SITE IS LOCATED:** 1953 Coast Flood Outline Essex

**PROXIMITY TO MAIN RIVER:** 355m

**PROXIMITY TO NEAREST WATERCOURSE:** 279m

**ANGLIAN WATER DG5 RECORDED FLOOD INCIDENTS BASED ON POSTCODE AREA**

134 records in Postcode Area SS8 7

**FLUVIAL FLOODING**

**% OF SITE AT RISK OF FLOODING IN THE DESIGN EVENT (1% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE):** 0%

**SURFACE WATER FLOODING**

0.1% AEP:	0%	1% AEP:	0%	3.33%:	0%
-----------	----	---------	----	--------	----

0.1% AEP + 40% Climate Change:	0%	1% AEP + 40% Climate Change:	0%	3.33% AEP + 40% Climate Change:	0%
--------------------------------	----	------------------------------	----	---------------------------------	----


## Legend

- Castle Point Borough Council
- Site of Interest
- Other Allocation Sites
- EA Main River
- Watercourse
- Reduction in Risk of Flooding from Rivers and Sea due to Defences

## Flood Zones

- Flood Zone 3b
- Flood Zone 3a
- Flood Zone 2

THESE MAPS ARE INTERACTIVE AND REQUIRE THE USE OF ADOBE ACROBAT TO BE ABLE TO CLICK ON THE INDIVIDUAL TABS TO LOAD THE LAYERS. PLEASE USE THE BUTTONS BELOW TO DISPLAY / HIDE DIFFERENT SOURCES OF FLOOD RISK TO THE SITE.

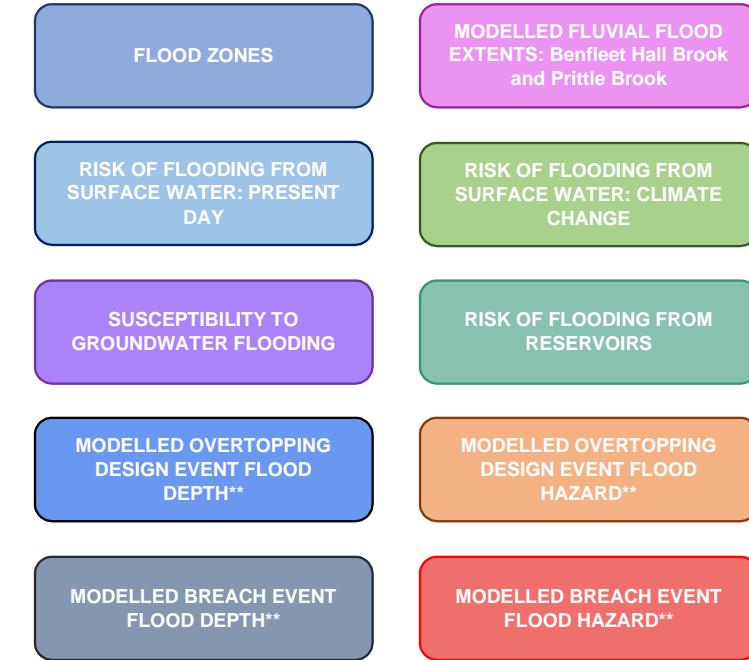

## EXCEPTION TEST?

Exception Test required.

Site is fully located within Flood Zone 3a. Proposed development has a vulnerability classification of More Vulnerable.

## GROUNDWATER FLOODING

**BEDROCK GEOLOGY:** London Clay Formation

**SUPERFICIAL GEOLOGY:** Tidal Flat Deposits

## BGS SUSCEPTIBILITY TO GROUNDWATER FLOODING

This site is not indicated to be prone to groundwater flooding.

## TIDAL FLOODING

### OVERTOPPING DESIGN EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK OF FLOODING:** 0%

### BREACH EVENT (0.5% AEP + HIGHER CENTRAL CLIMATE CHANGE ALLOWANCE)

**% OF SITE AT RISK FROM FLOODING:** 100%

### BREACH FASTEST TIME TO INUNDATION (0.1% AEP + UPPER END CLIMATE CHANGE ALLOWANCE)\*\*\*

**FASTEST TIME TO INUNDATION:** <1 hour **FROM BREACH LOCATION(S):** CAS05

## RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH)


### % OF SITE AT RISK OF FLOODING FROM RESERVOIRS (IN THE EVENT OF A BREACH):


<b>WHEN RIVER LEVELS ARE NORMAL:</b> 0%	<b>WHEN THERE IS ALSO FLOODING FROM RIVERS:</b> 0%
---	--

<b>Site Reference</b>	40255	<b>Allocation Number</b>	C10(c)	<b>Site Name</b>	Kushi, Furtherwick Rd
<b>Flood Risk Summary</b>					
<p>The site is located in the east of Canvey Island. The site, and the whole of Canvey Island, is defined as Flood Zone 3a 'High Probability of Flooding' from the Thames Estuary. However, Canvey Island is surrounded by tidal flood defences which provide a high level of protection, and therefore the majority of the island, and therefore the site (100%), is also shown to be defined as within the 'Reduction in Risk of Flooding from Rivers and Sea due to Defences' area. During the design event (0.5% AEP) for the year 2125, the site and Canvey Island is shown to be protected from flooding from the Thames. The site is therefore at residual risk of flooding from the sea, in the event of a breach or failure of flood defences. Historic flood records indicate that the site experienced flooding in the 1953 Essex flood event, before the tidal flood defences were in place.</p>					
<p>Tidal breach modelling has been undertaken to assess the residual risk of flooding from the Thames Estuary. This shows that the entire site is at risk of flooding in the event of a breach or failure of flood defences during the 0.5% AEP for the year 2125. The majority of the site is 'Significant' hazard (Danger for Most) with a small area in the centre of the site of 'Moderate' hazard (Danger for Some). The maximum flood depth during this event is between 0.5 and 1m. The maximum water level on the site during this event from breach location CAS05 is approximately 2.8m AOD. Ground levels are approximately 2.3m AOD to the north of the site and 2m AOD to the south of the site. Access off Canvey Island is also at risk of flooding from a breach event.</p>					
<p>The modelled surface water risk mapping indicates the site is at very low risk of surface water flooding. The access route to the north on the High Street is at low to medium risk of surface water flooding.</p>					
<p>The BGS Susceptibility to Groundwater Flooding dataset indicates this area is not considered to be prone to groundwater flooding. The site does not lie within the at risk of flooding from reservoirs in the event of a breach or failure when both river levels are normal or when there is also flooding from rivers area.</p>					
<b>Site Specific Recommendations</b>					
<p>8 residential units are proposed for the site. More Vulnerable development (e.g. residential) is only permitted in Flood Zone 3a where it can be demonstrated that the Exception Test is satisfied i.e. (1) that the proposed development will provide wider sustainability benefits to the community that outweigh flood risk, and (2) that it will be safe for its lifetime, without increasing flood risk elsewhere and where possible reduce flood risk overall. A site-specific FRA will be required. The following recommendations are made for this site:</p>					
<p><b>Tidal and Fluvial</b></p> <ul style="list-style-type: none"> <li>The site is at residual risk of flooding from the Thames Estuary in the event of a breach in flood risk management infrastructure. Therefore an internally accessible place of safety should be defined within the proposed development above the extreme flood level (0.1% AEP including climate change), capable of accommodating the likely number of occupants. The maximum water level on the site during the extreme flood event from breach location CAS05 is approximately 3.0m AOD.</li> <li>The site is located within the 'Canvey Island South' Flood Warning Area. Safe access/egress is available during the design event but is not available during a breach event. Developers need to sign up to Flood Warnings and prepare Emergency Plans for occupants of the site to set out the response in the event of a flood warning with respect to safe access routes and places of safety.</li> <li>Modelling of the design event (0.5% AEP including higher central climate change allowance) shows that Canvey Island is not at risk of flooding through overtopping, so there are no specific requirements on Finished Floor Levels for residential accommodation in relation to the risk of flooding from the sea.</li> </ul>					
<p><b>Surface Water</b></p> <ul style="list-style-type: none"> <li>Development proposals for the site should seek to restrict surface water runoff rates to greenfield rates; demonstrate sustainable approaches to the management of surface water in accordance with the drainage hierarchy; make use of SuDS (including green/blue roofs, permeable paving, downpipe planters, attenuating tree pits, rain gardens and other innovative technologies); and incorporate soft landscaping, planting and permeable surfacing.</li> </ul>					

- Finished Floor Levels of any new buildings should be raised by a minimum of 300mm above the surrounding ground level to address the surface water flood risk and the residual risk of exceedance events or blockages to the surface water system occurring.

# Appendix B Surface Water Mapping

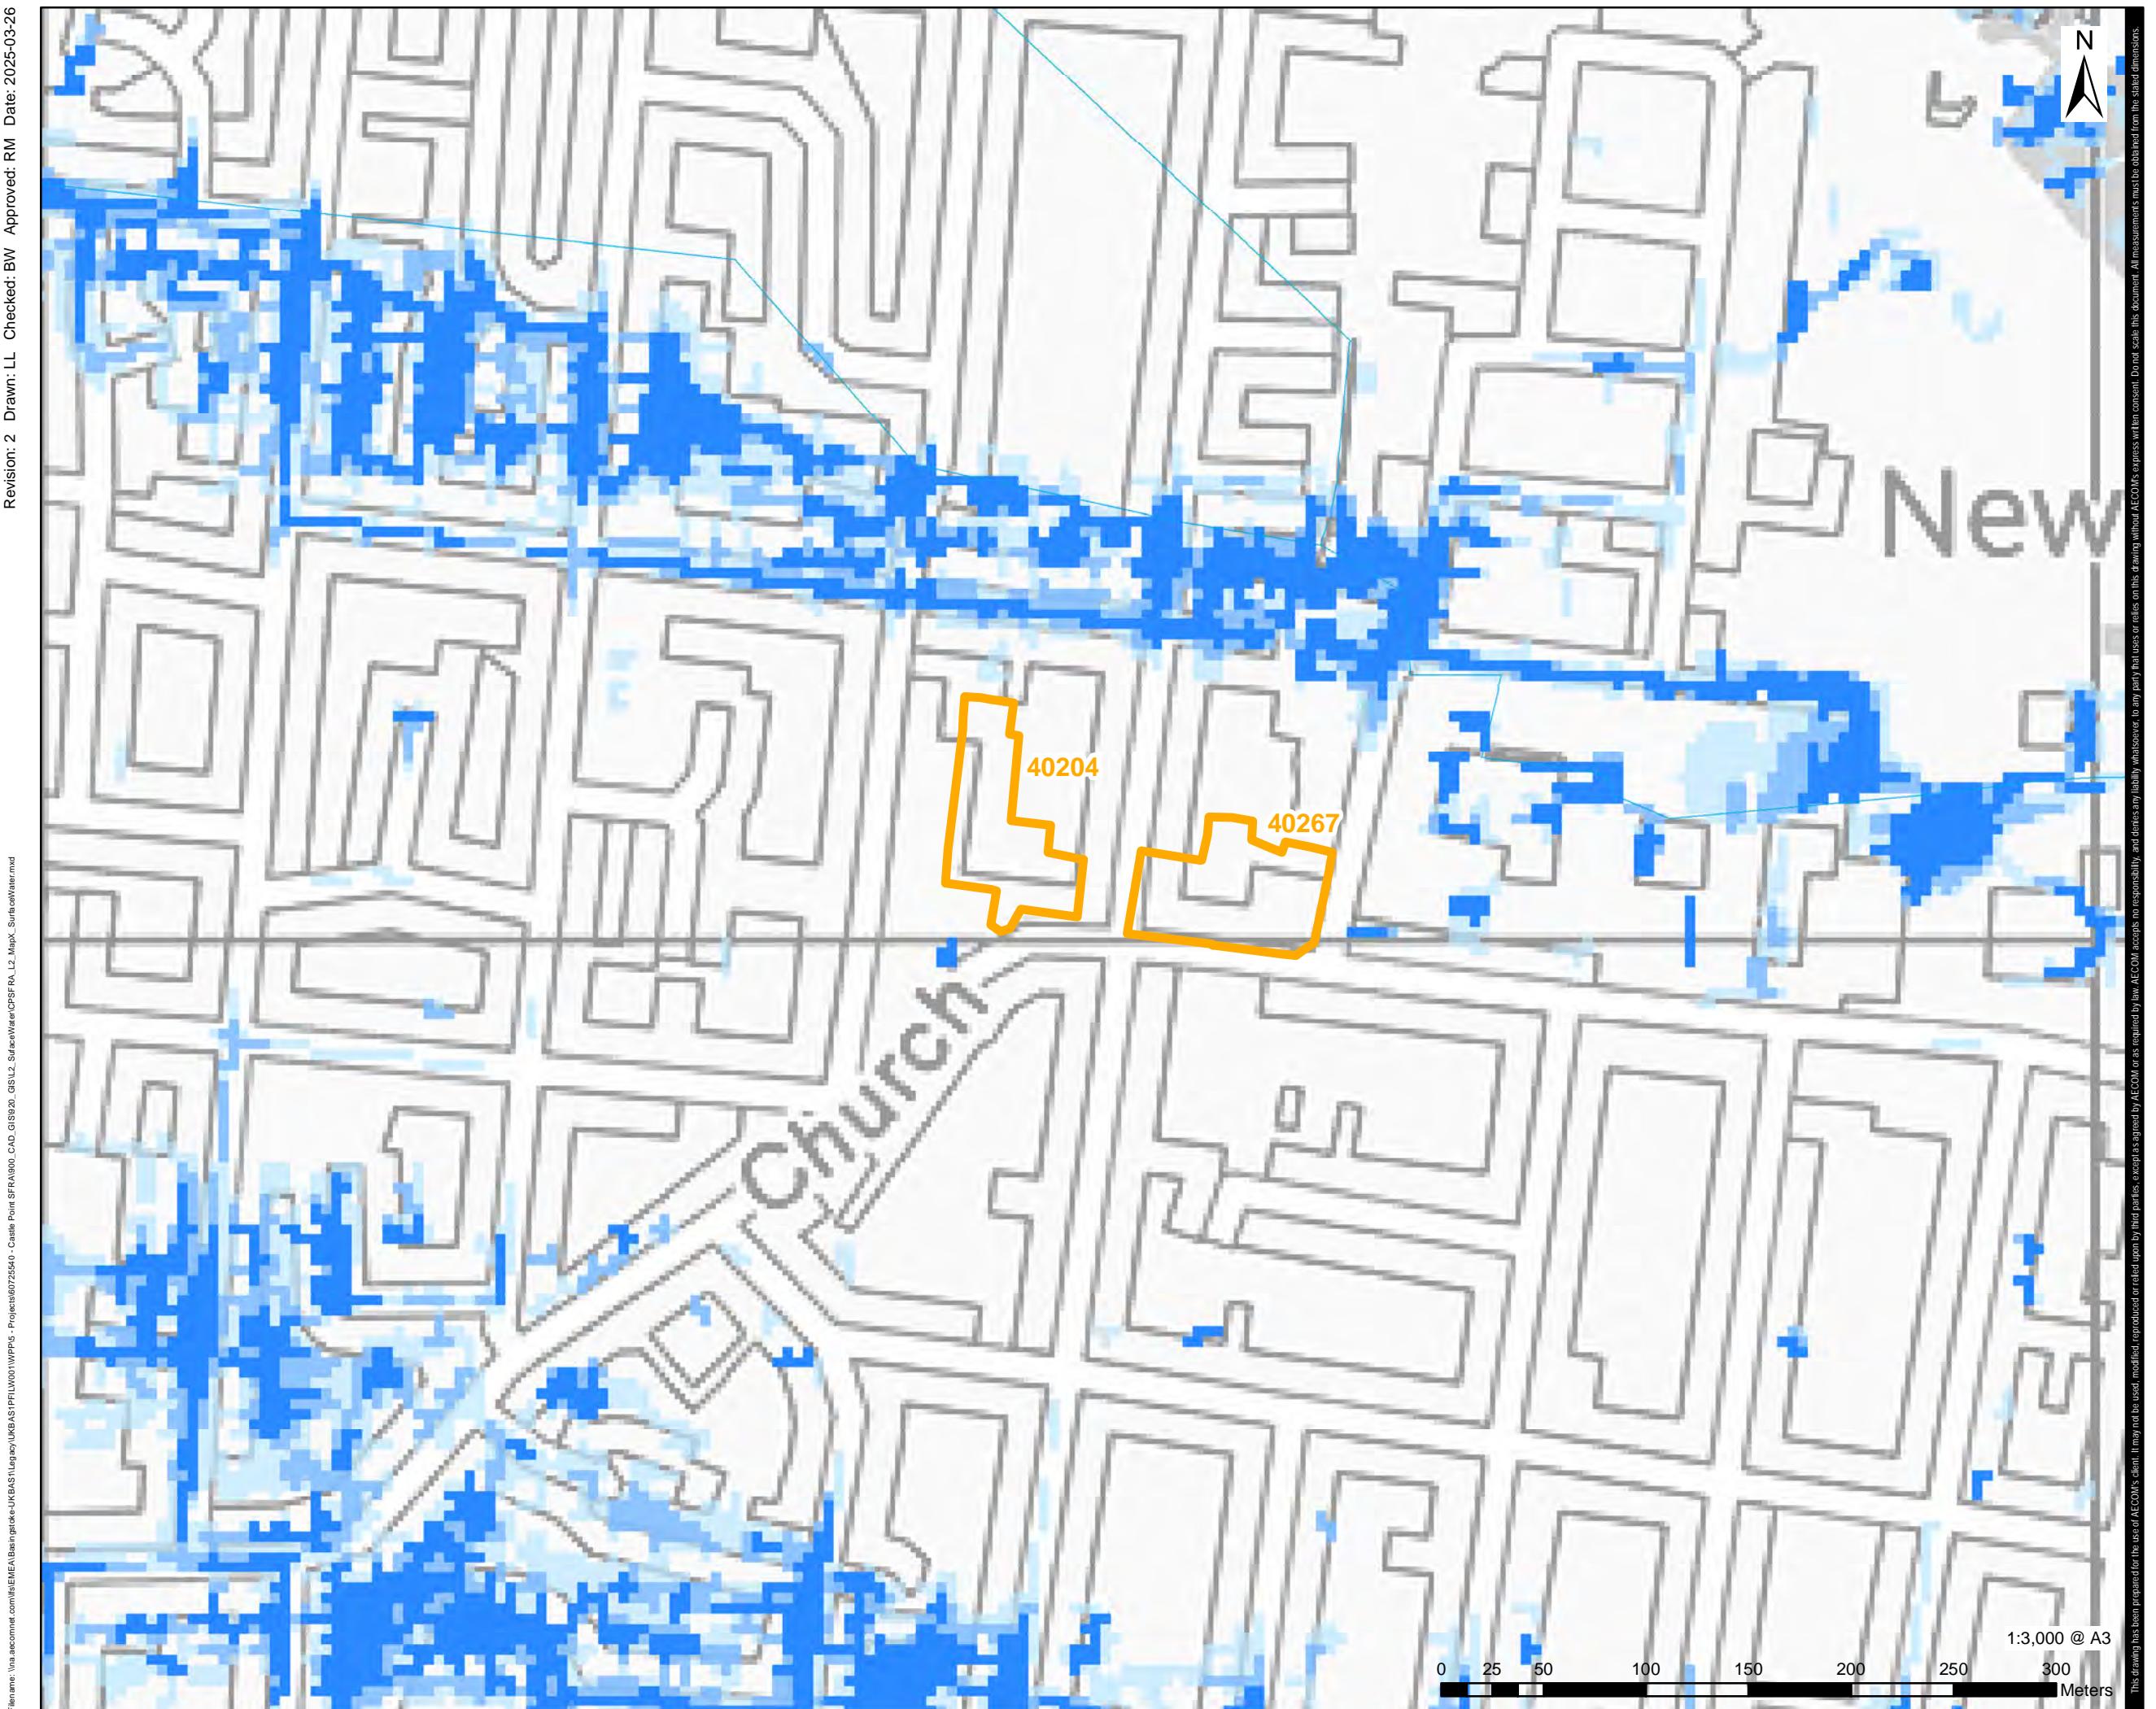

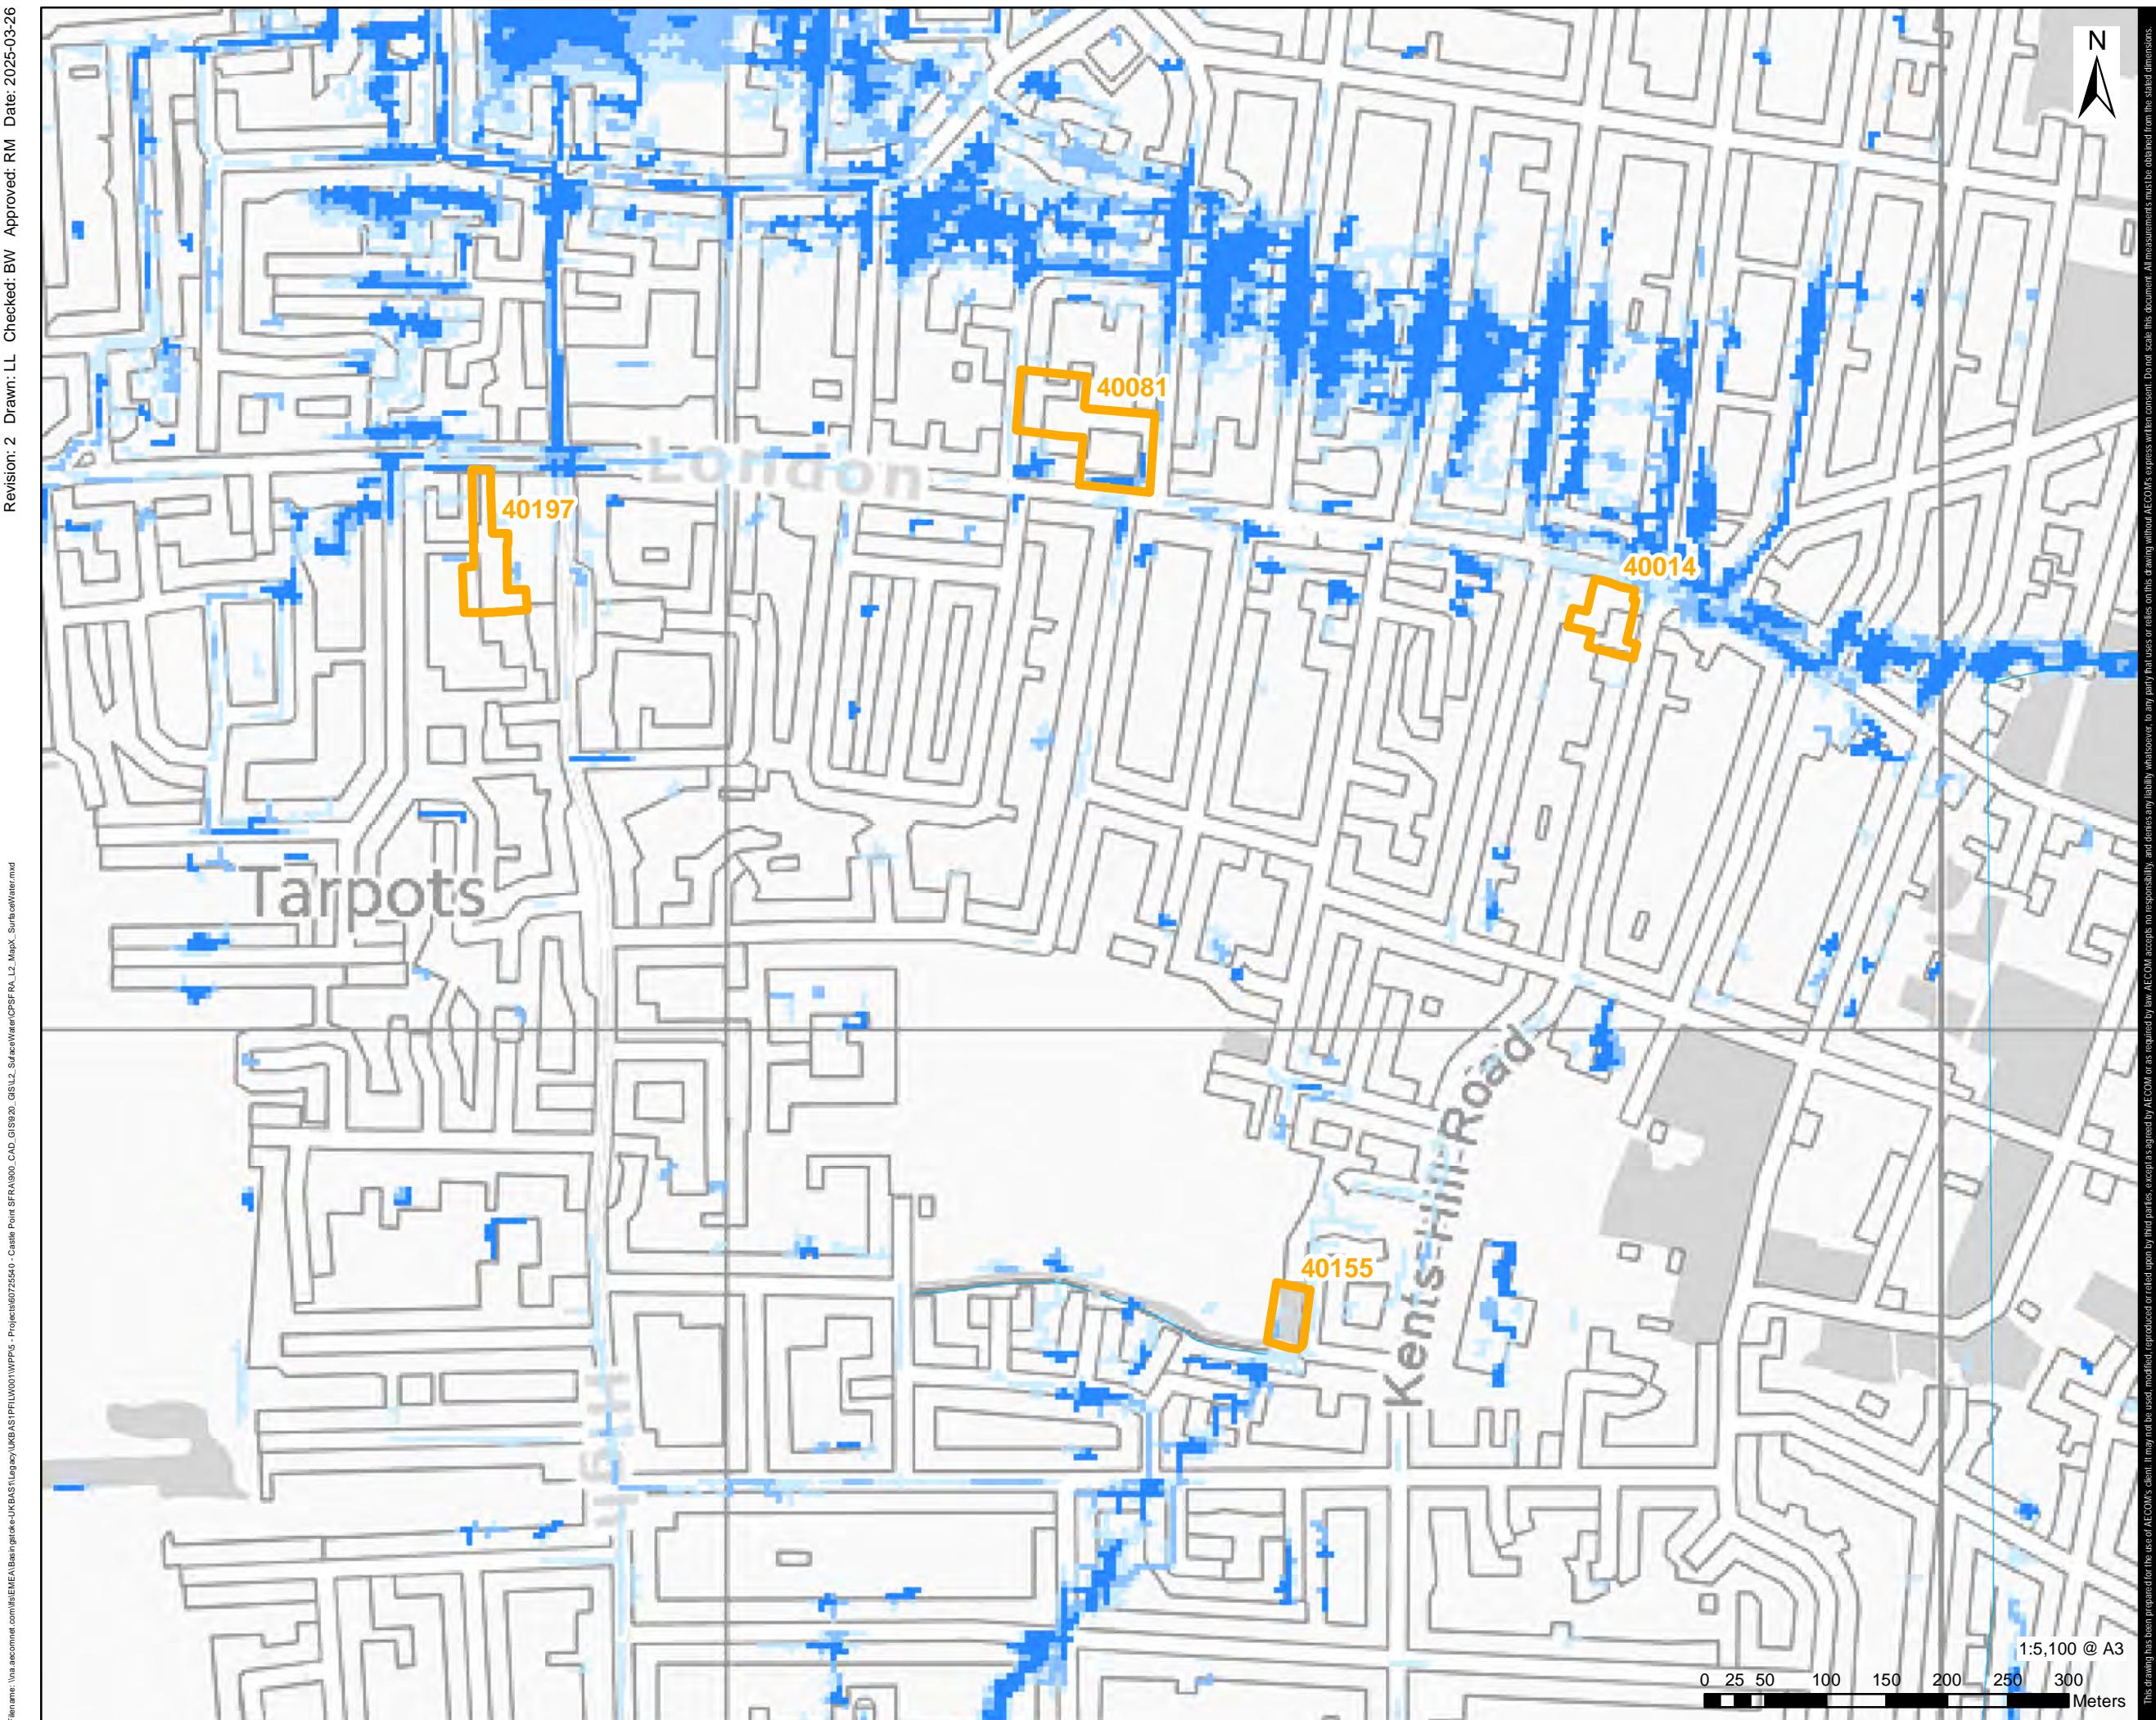

AECOM

## PROJECT

Castle Point Borough Council  
Level 2 Strategic Flood Risk Assessment

## CLIENT

Castle Point Borough Council


## CONSULTANT

AECOM Limited  
Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
www.aecom.com

## LEGEND

- Castle Point Borough Council
- EA Main River
- Watercourse
- Modelled Surface Water Flood Risk Extents
  - 3.3% AEP
  - 1% AEP
  - 0.1% AEP

## EXTENT INDICATOR



## NOTES

- This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events. Refer to the Level 1 SFRA report for details on the surface water modelling methodology, assumptions and limitations.
- This map displays results from the South Essex model.
- This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2023)

## ISSUE PURPOSE

SFRA

## PROJECT NUMBER


60725540

## MAP TITLE

Modelled Surface Water Flood Risk -  
Present Day Area B

## MAP NUMBER

Appendix B Map 1B

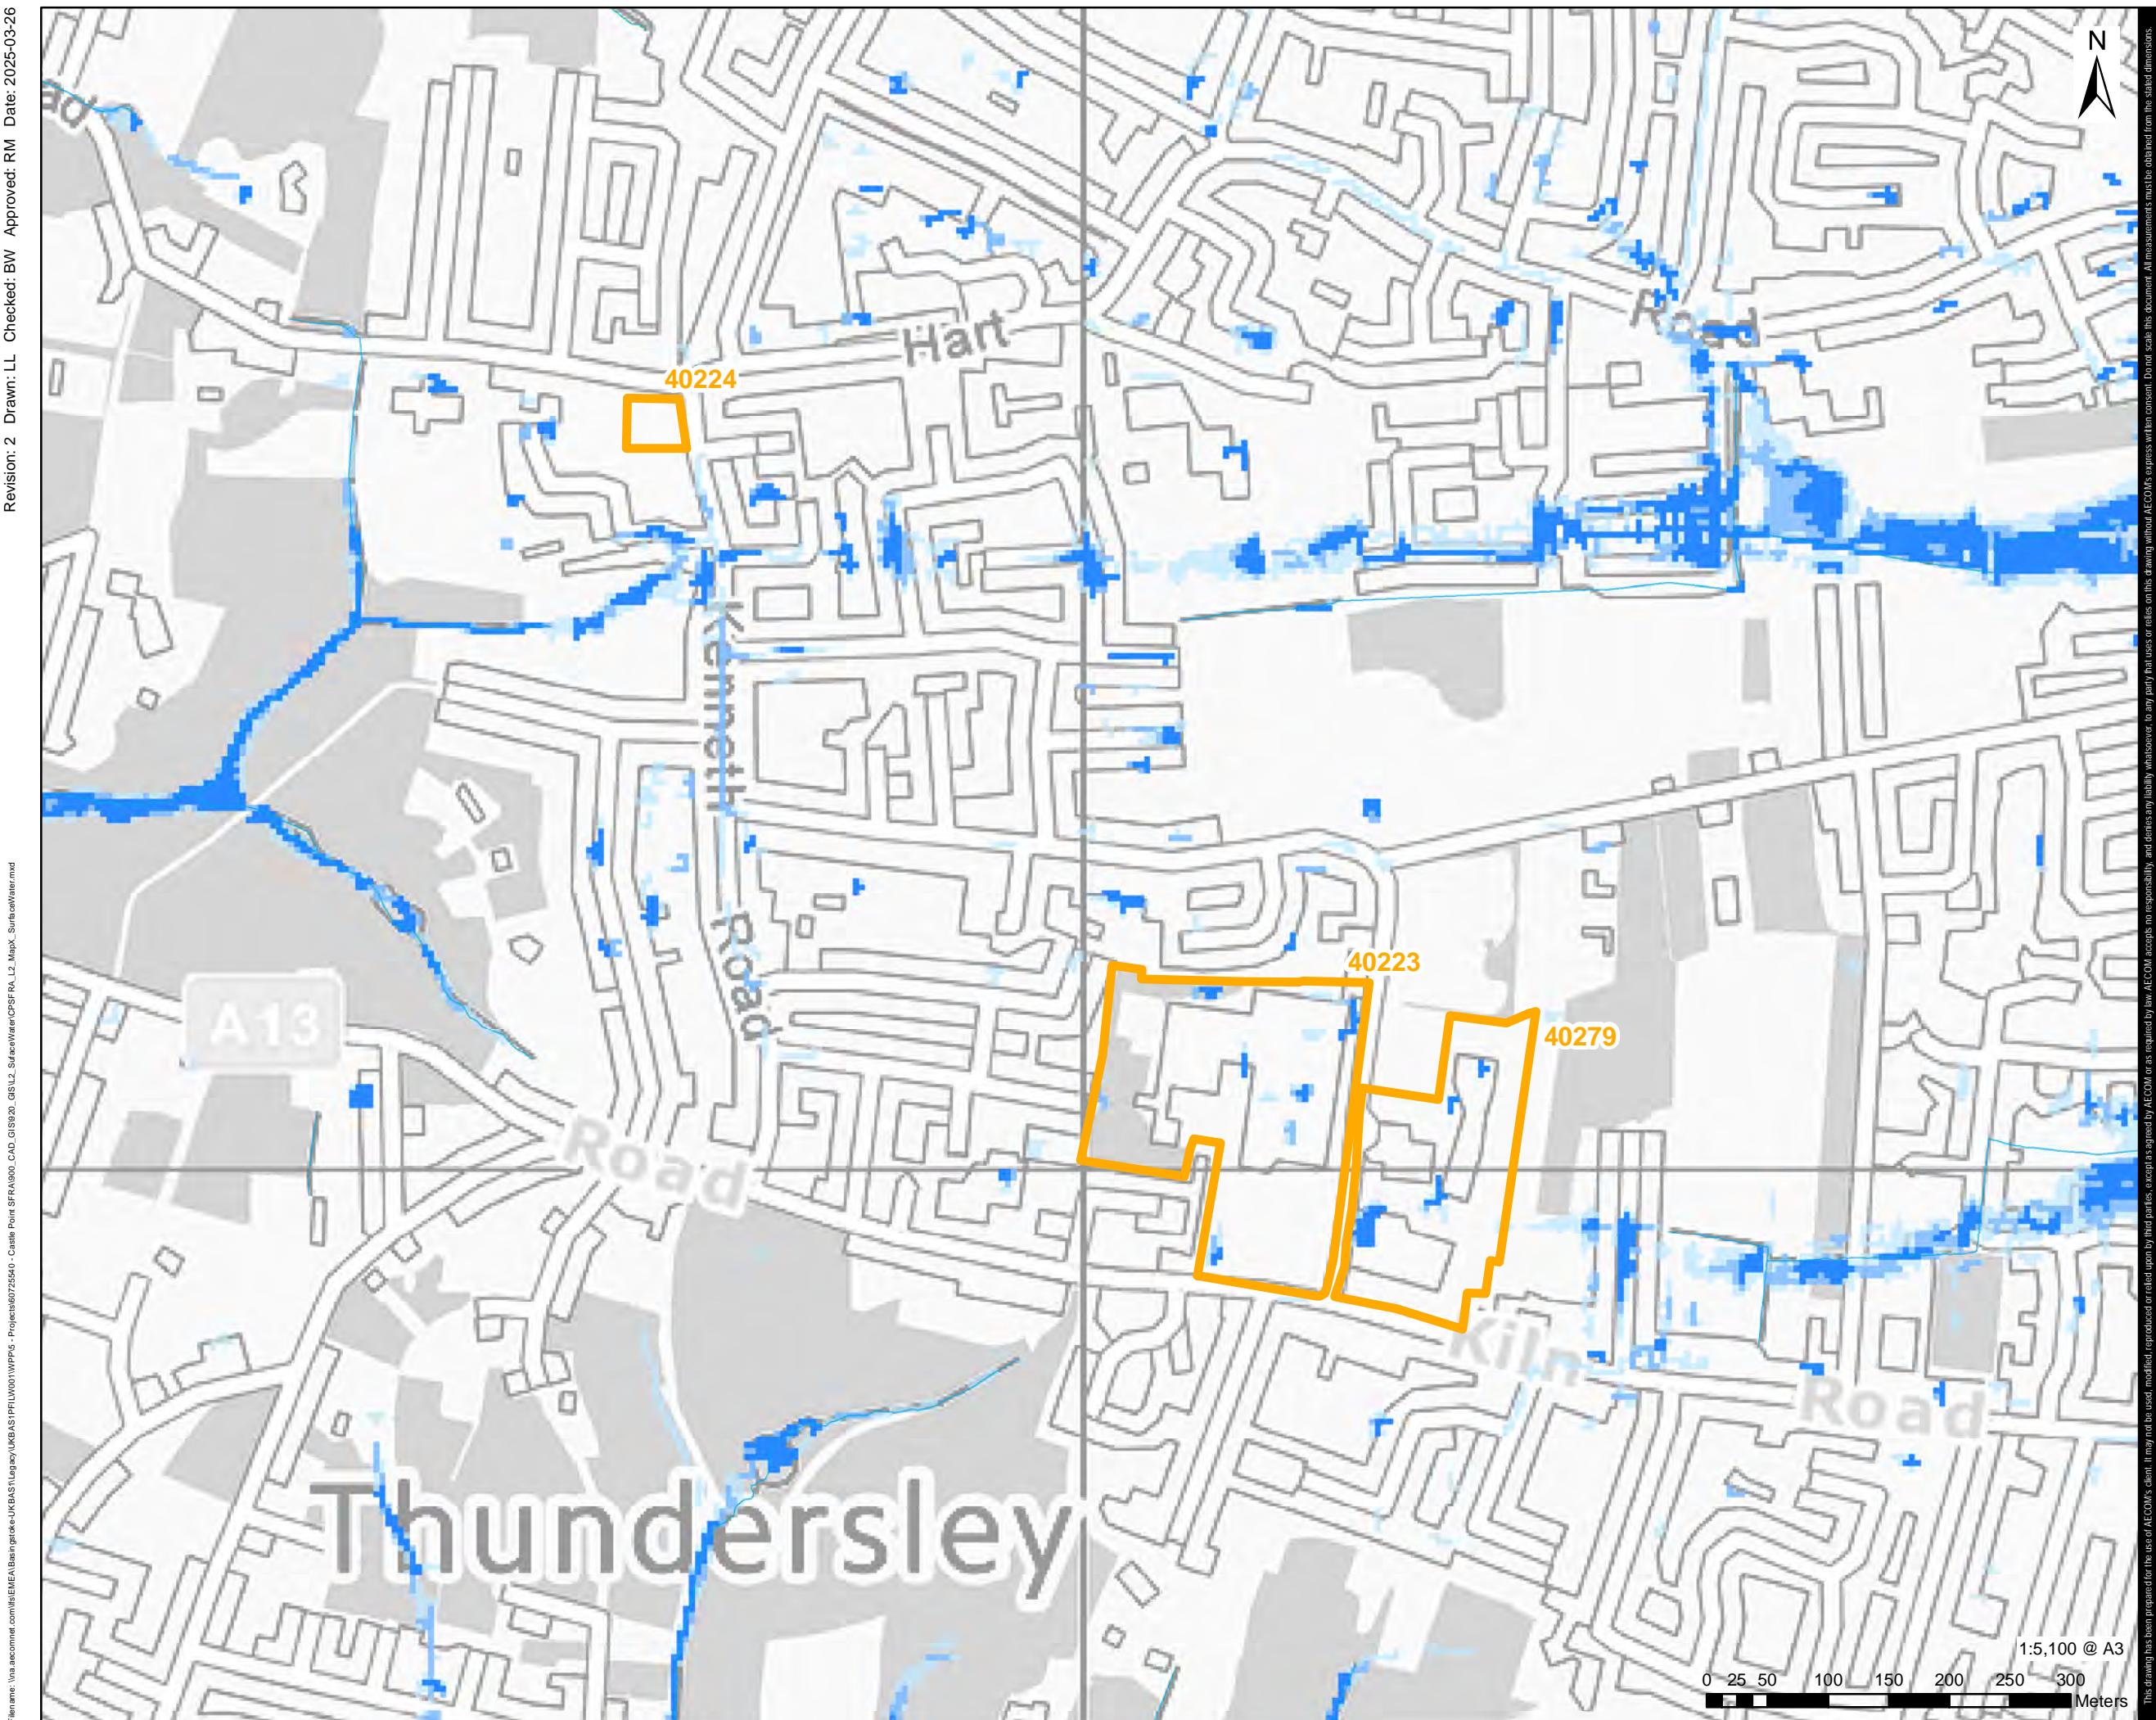

AECOM

## PROJECT

Castle Point Borough Council  
Level 2 Strategic Flood Risk Assessment  
CLIENT


Castle Point Borough Council  
CONSULTANT

AECOM Limited  
Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
www.aecom.com

## LEGEND

- Castle Point Borough Council
- EA Main River
- Watercourse
- Modelled Surface Water Flood Risk Extents
  - 3.3% AEP
  - 1% AEP
  - 0.1% AEP

## EXTENT INDICATOR



## NOTES

- This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events. Refer to the Level 1 SFRRA report for details on the surface water modelling methodology, assumptions and limitations.
- This map displays results from the South Essex model.
- This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2023)

## ISSUE PURPOSE

SFRRA

## PROJECT NUMBER


60725540


## MAP TITLE

Modelled Surface Water Flood Risk -  
Present Day Area C

## MAP NUMBER


Appendix B Map 1C

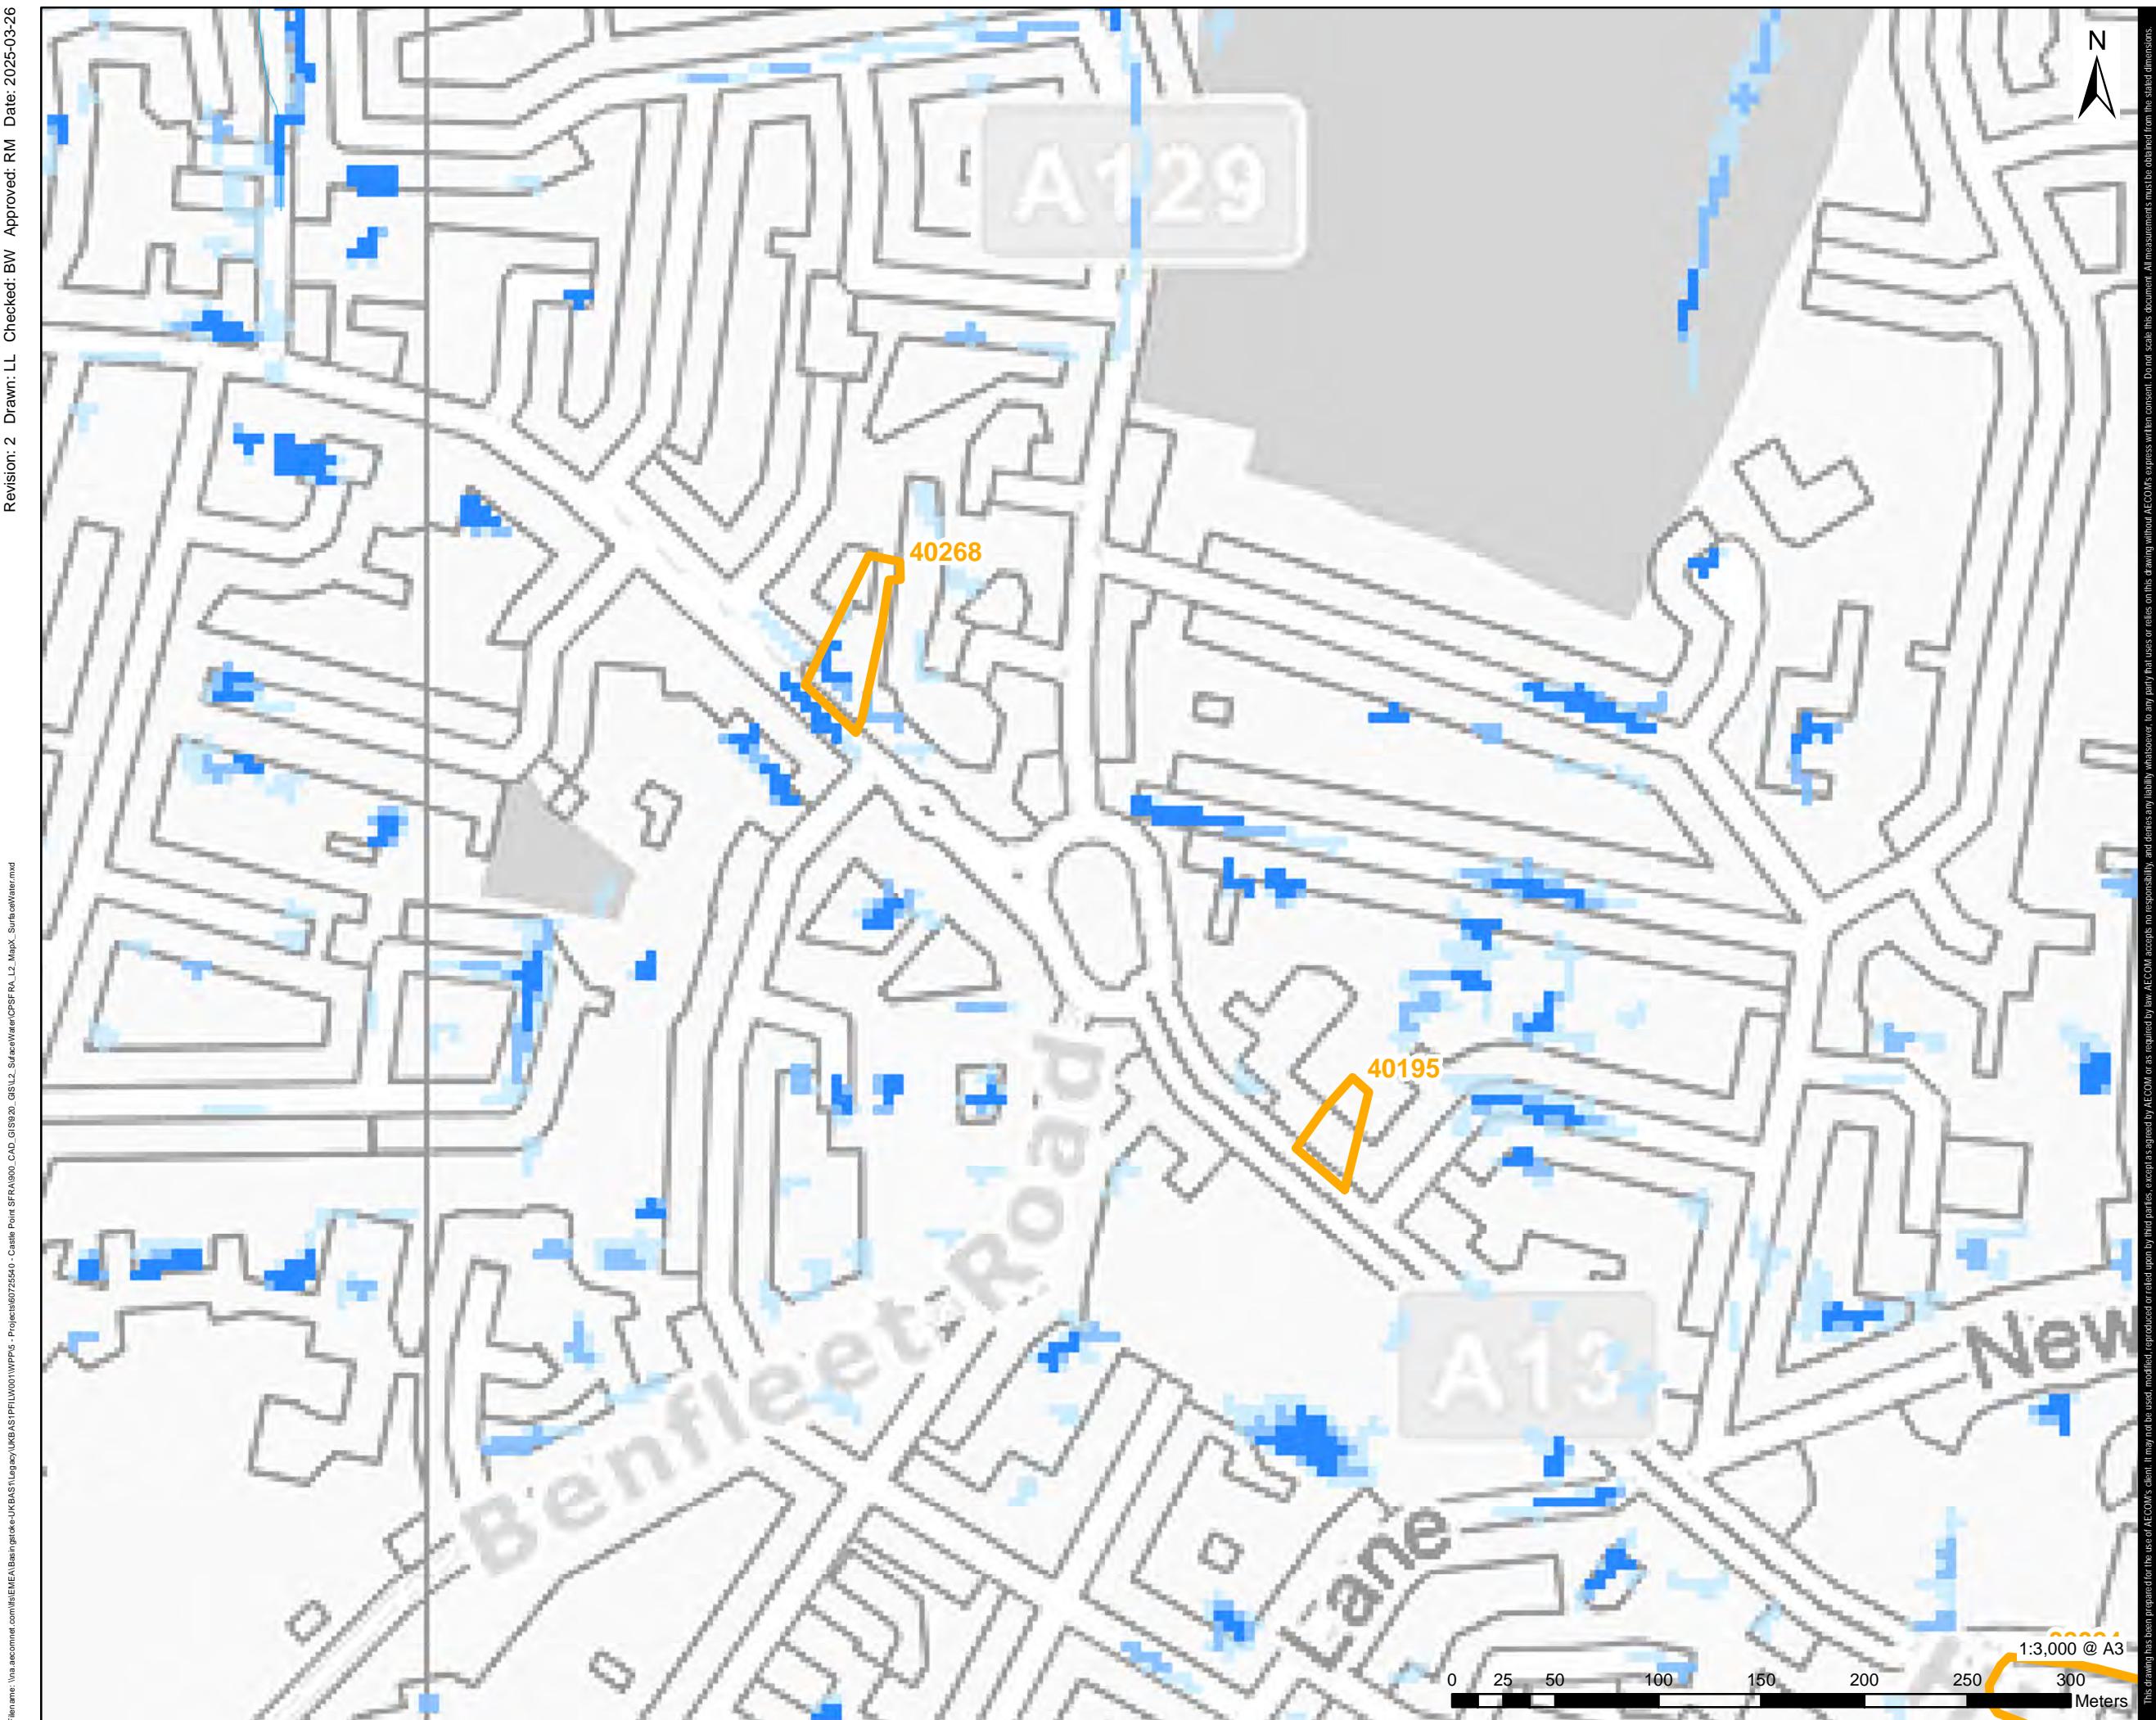


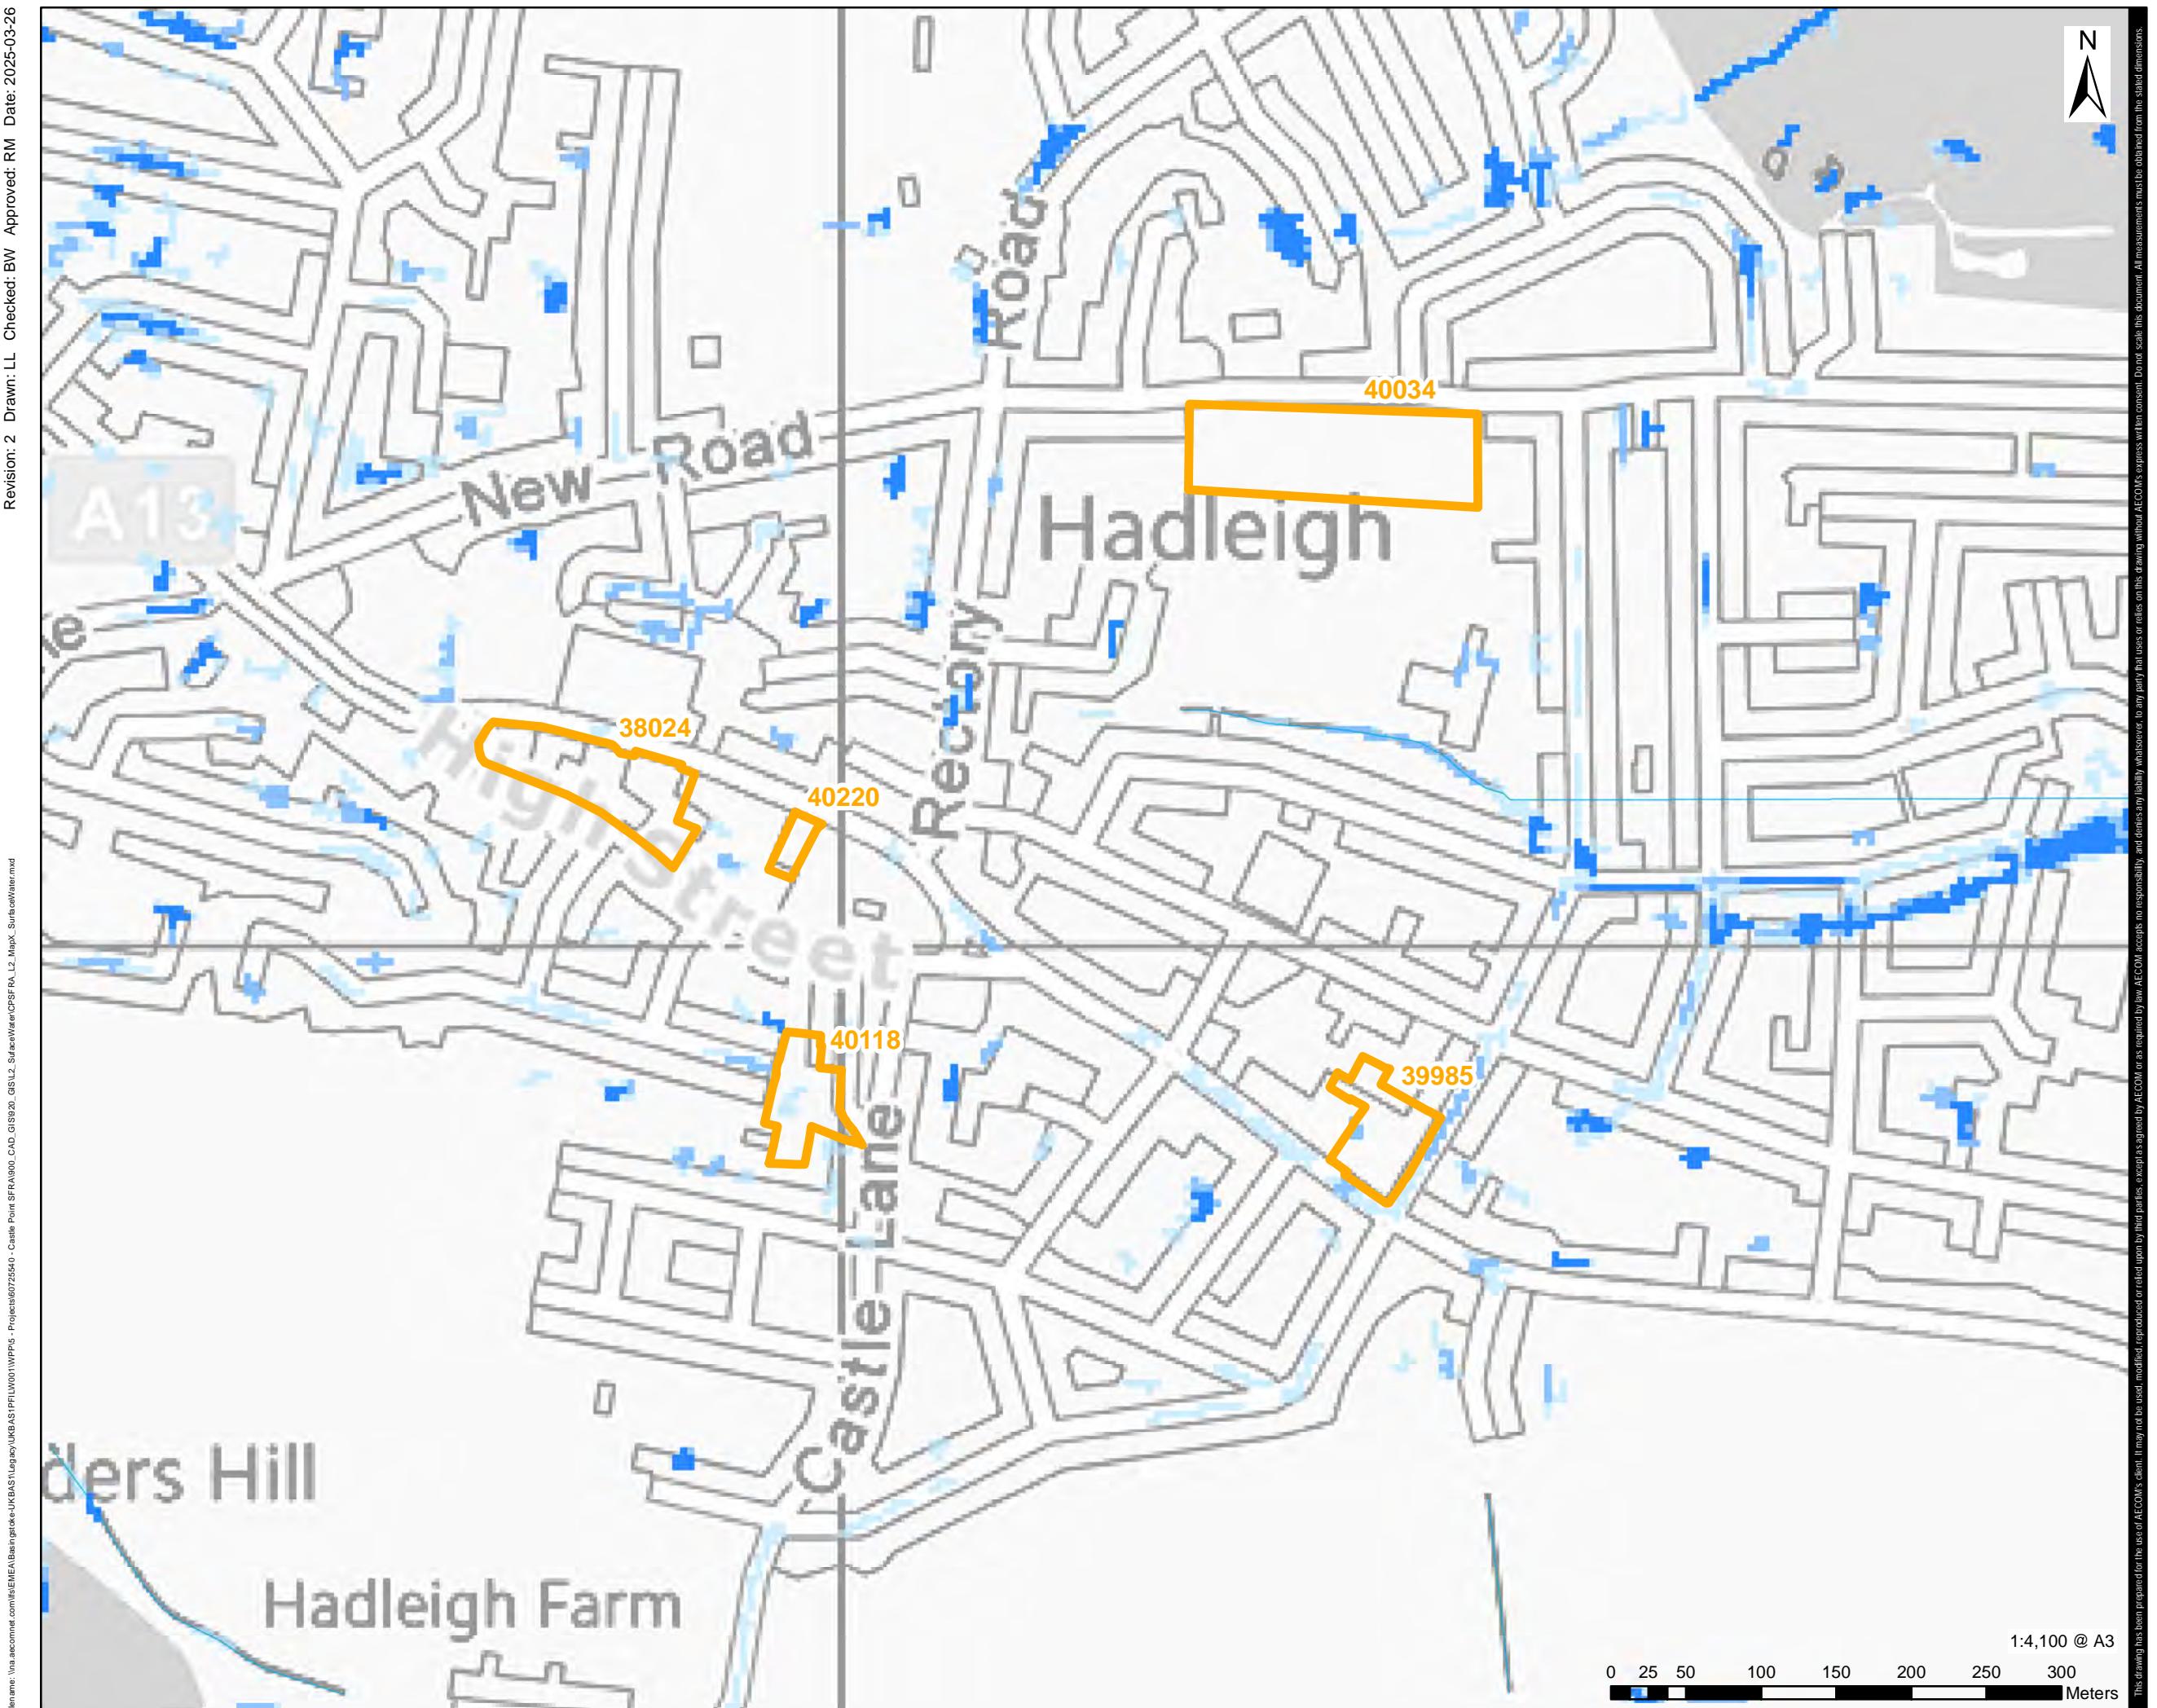

**AECOM**  
**PROJECT**  
 Castle Point Borough Council  
 Level 2 Strategic Flood Risk Assessment  
**CLIENT**  
 Castle Point Borough Council  
**CONSULTANT**  
 AECOM Limited  
 Midpoint, Alencon Link,  
 Basingstoke, Hampshire  
 RG21 7PP  
 www.aecom.com  
**LEGEND**  
  
**Modelled Surface Water Flood Risk Extents**  
 3.3% AEP  
 1% AEP  
 0.1% AEP  
**EXTENT INDICATOR**  
  
**NOTES**  
 1: This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events. Refer to the Level 1 SFRA report for details on the surface water modelling methodology, assumptions and limitations.  
 2: This map displays results from the South Essex model.  
 3: This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.  
 © Environment Agency copyright and/or database right.  
 Contains OS data © Crown copyright and database right (2023)  
**ISSUE PURPOSE**  
 SFRA  
**PROJECT NUMBER**  
 60725540  
**MAP TITLE**  
 Modelled Surface Water Flood Risk - Present Day Area E  
**MAP NUMBER**  
 Appendix B Map 1E

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

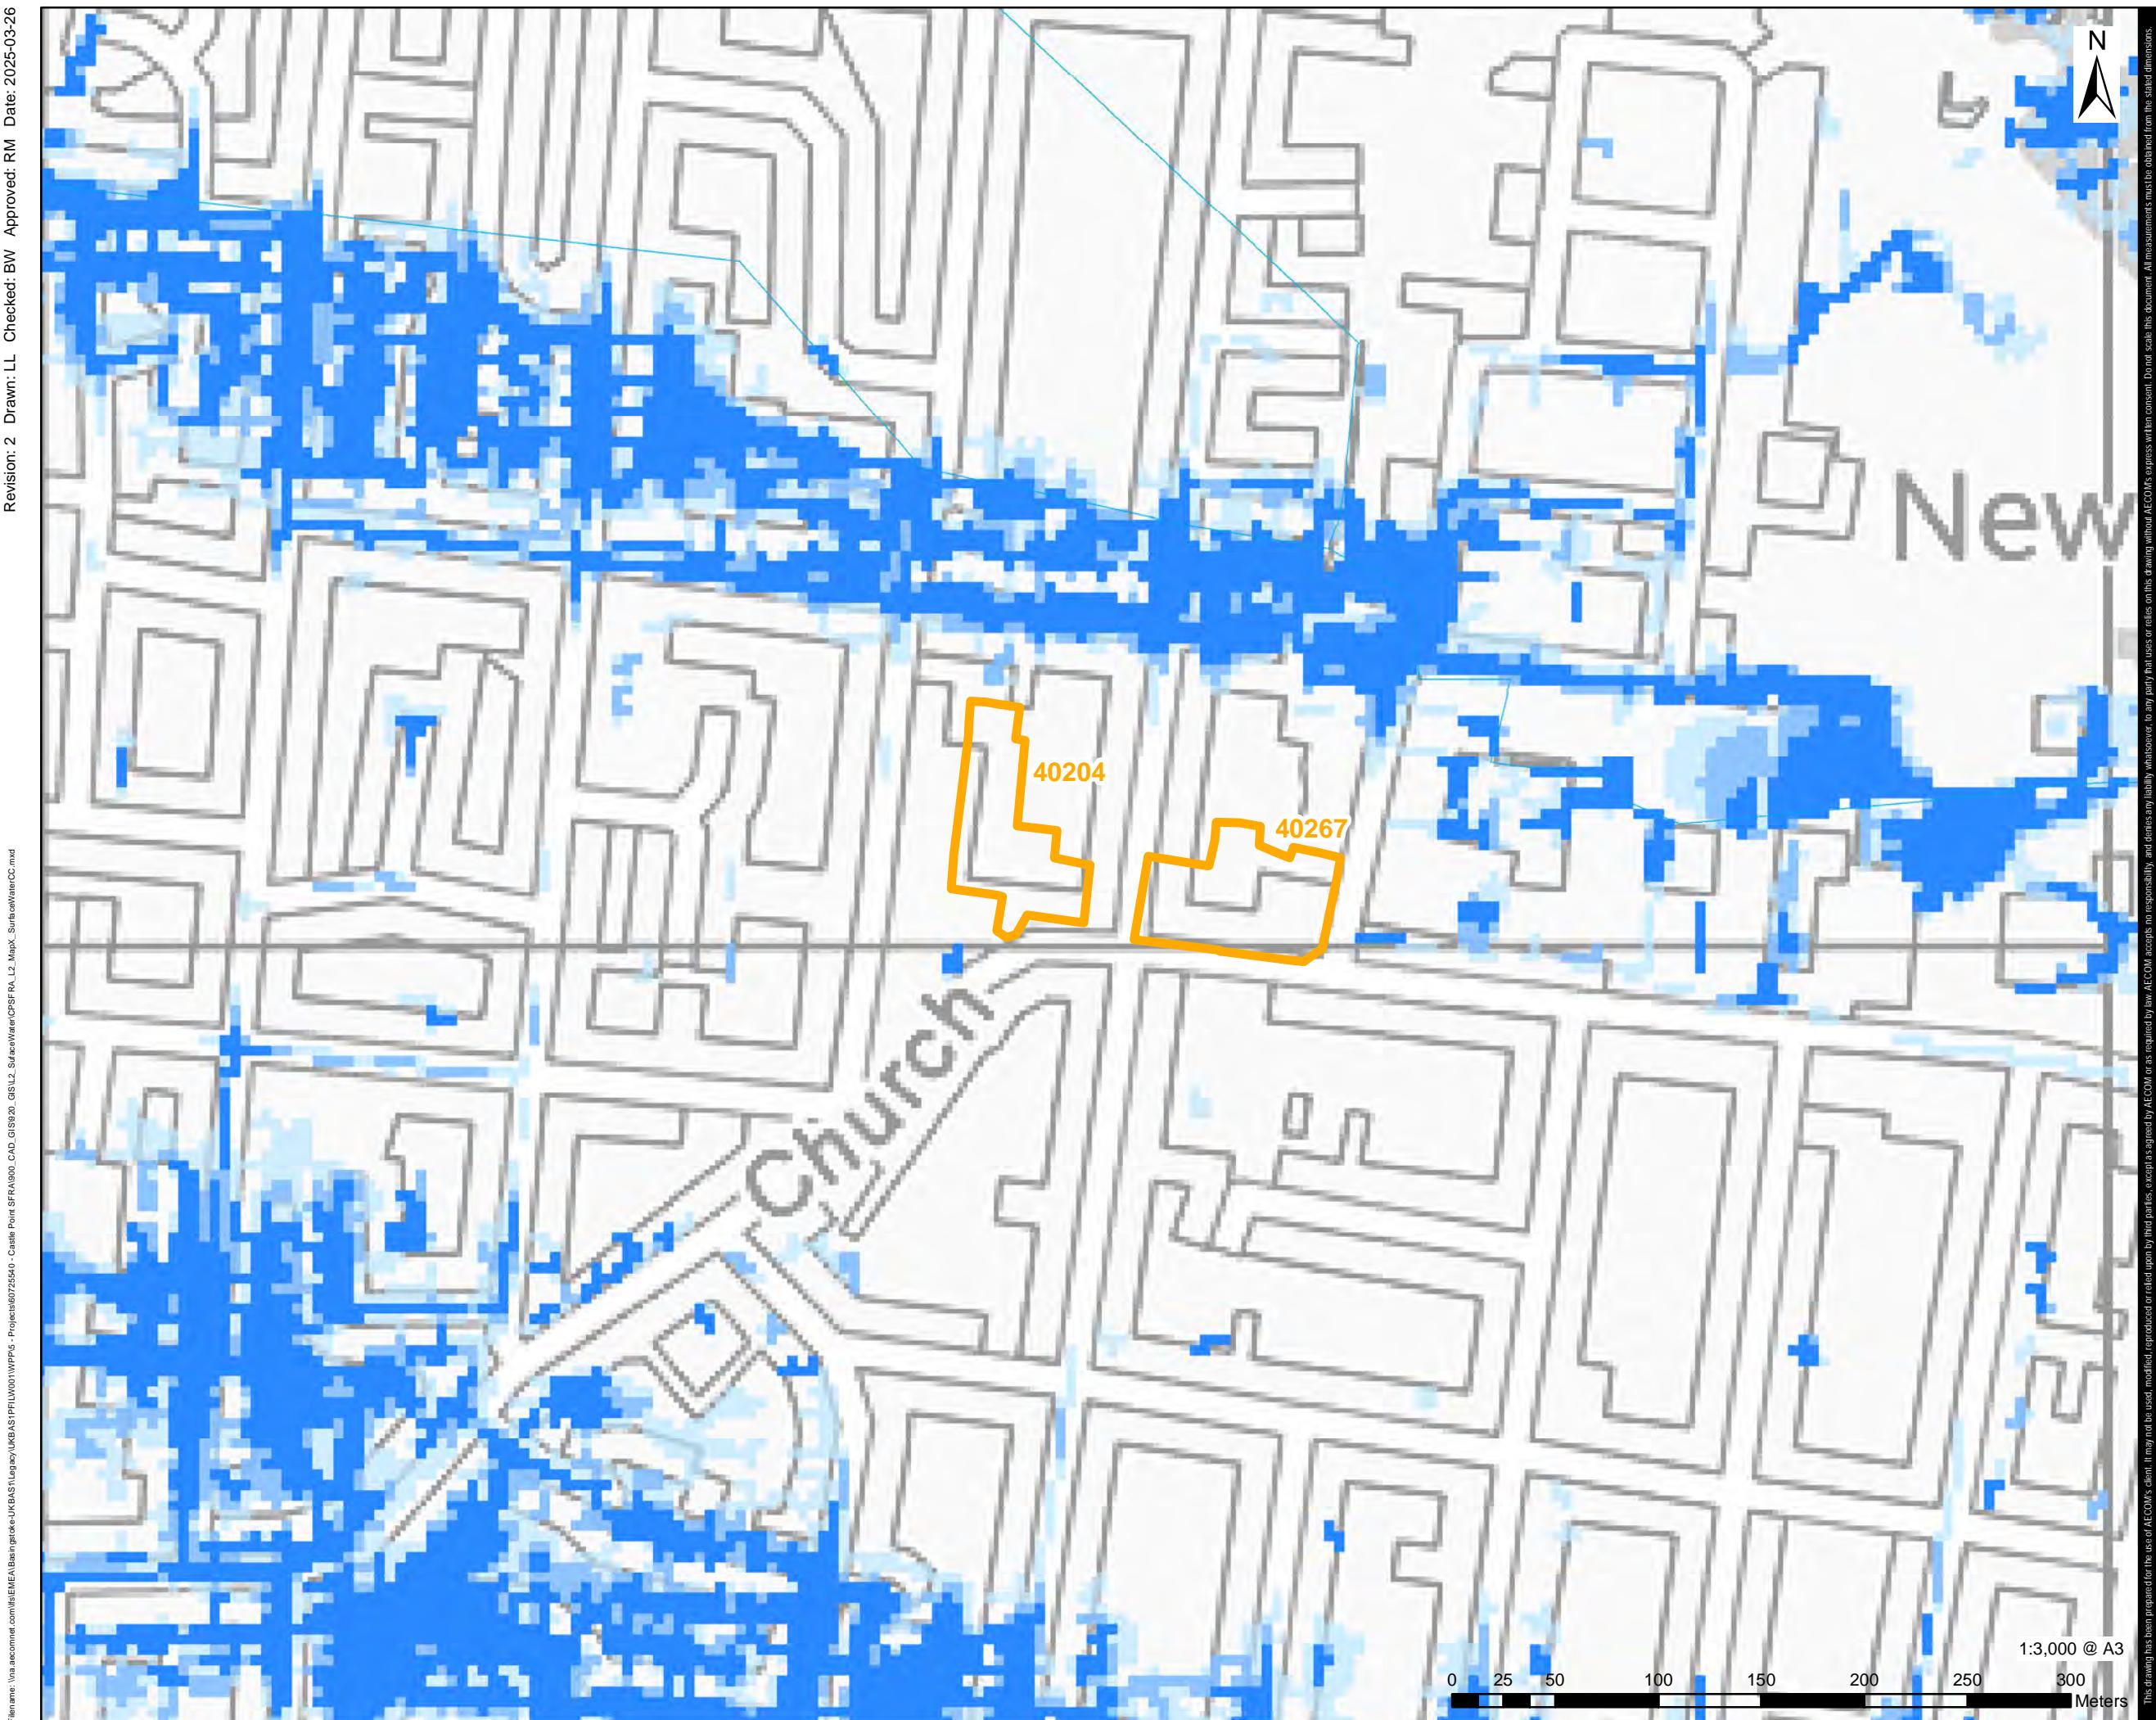

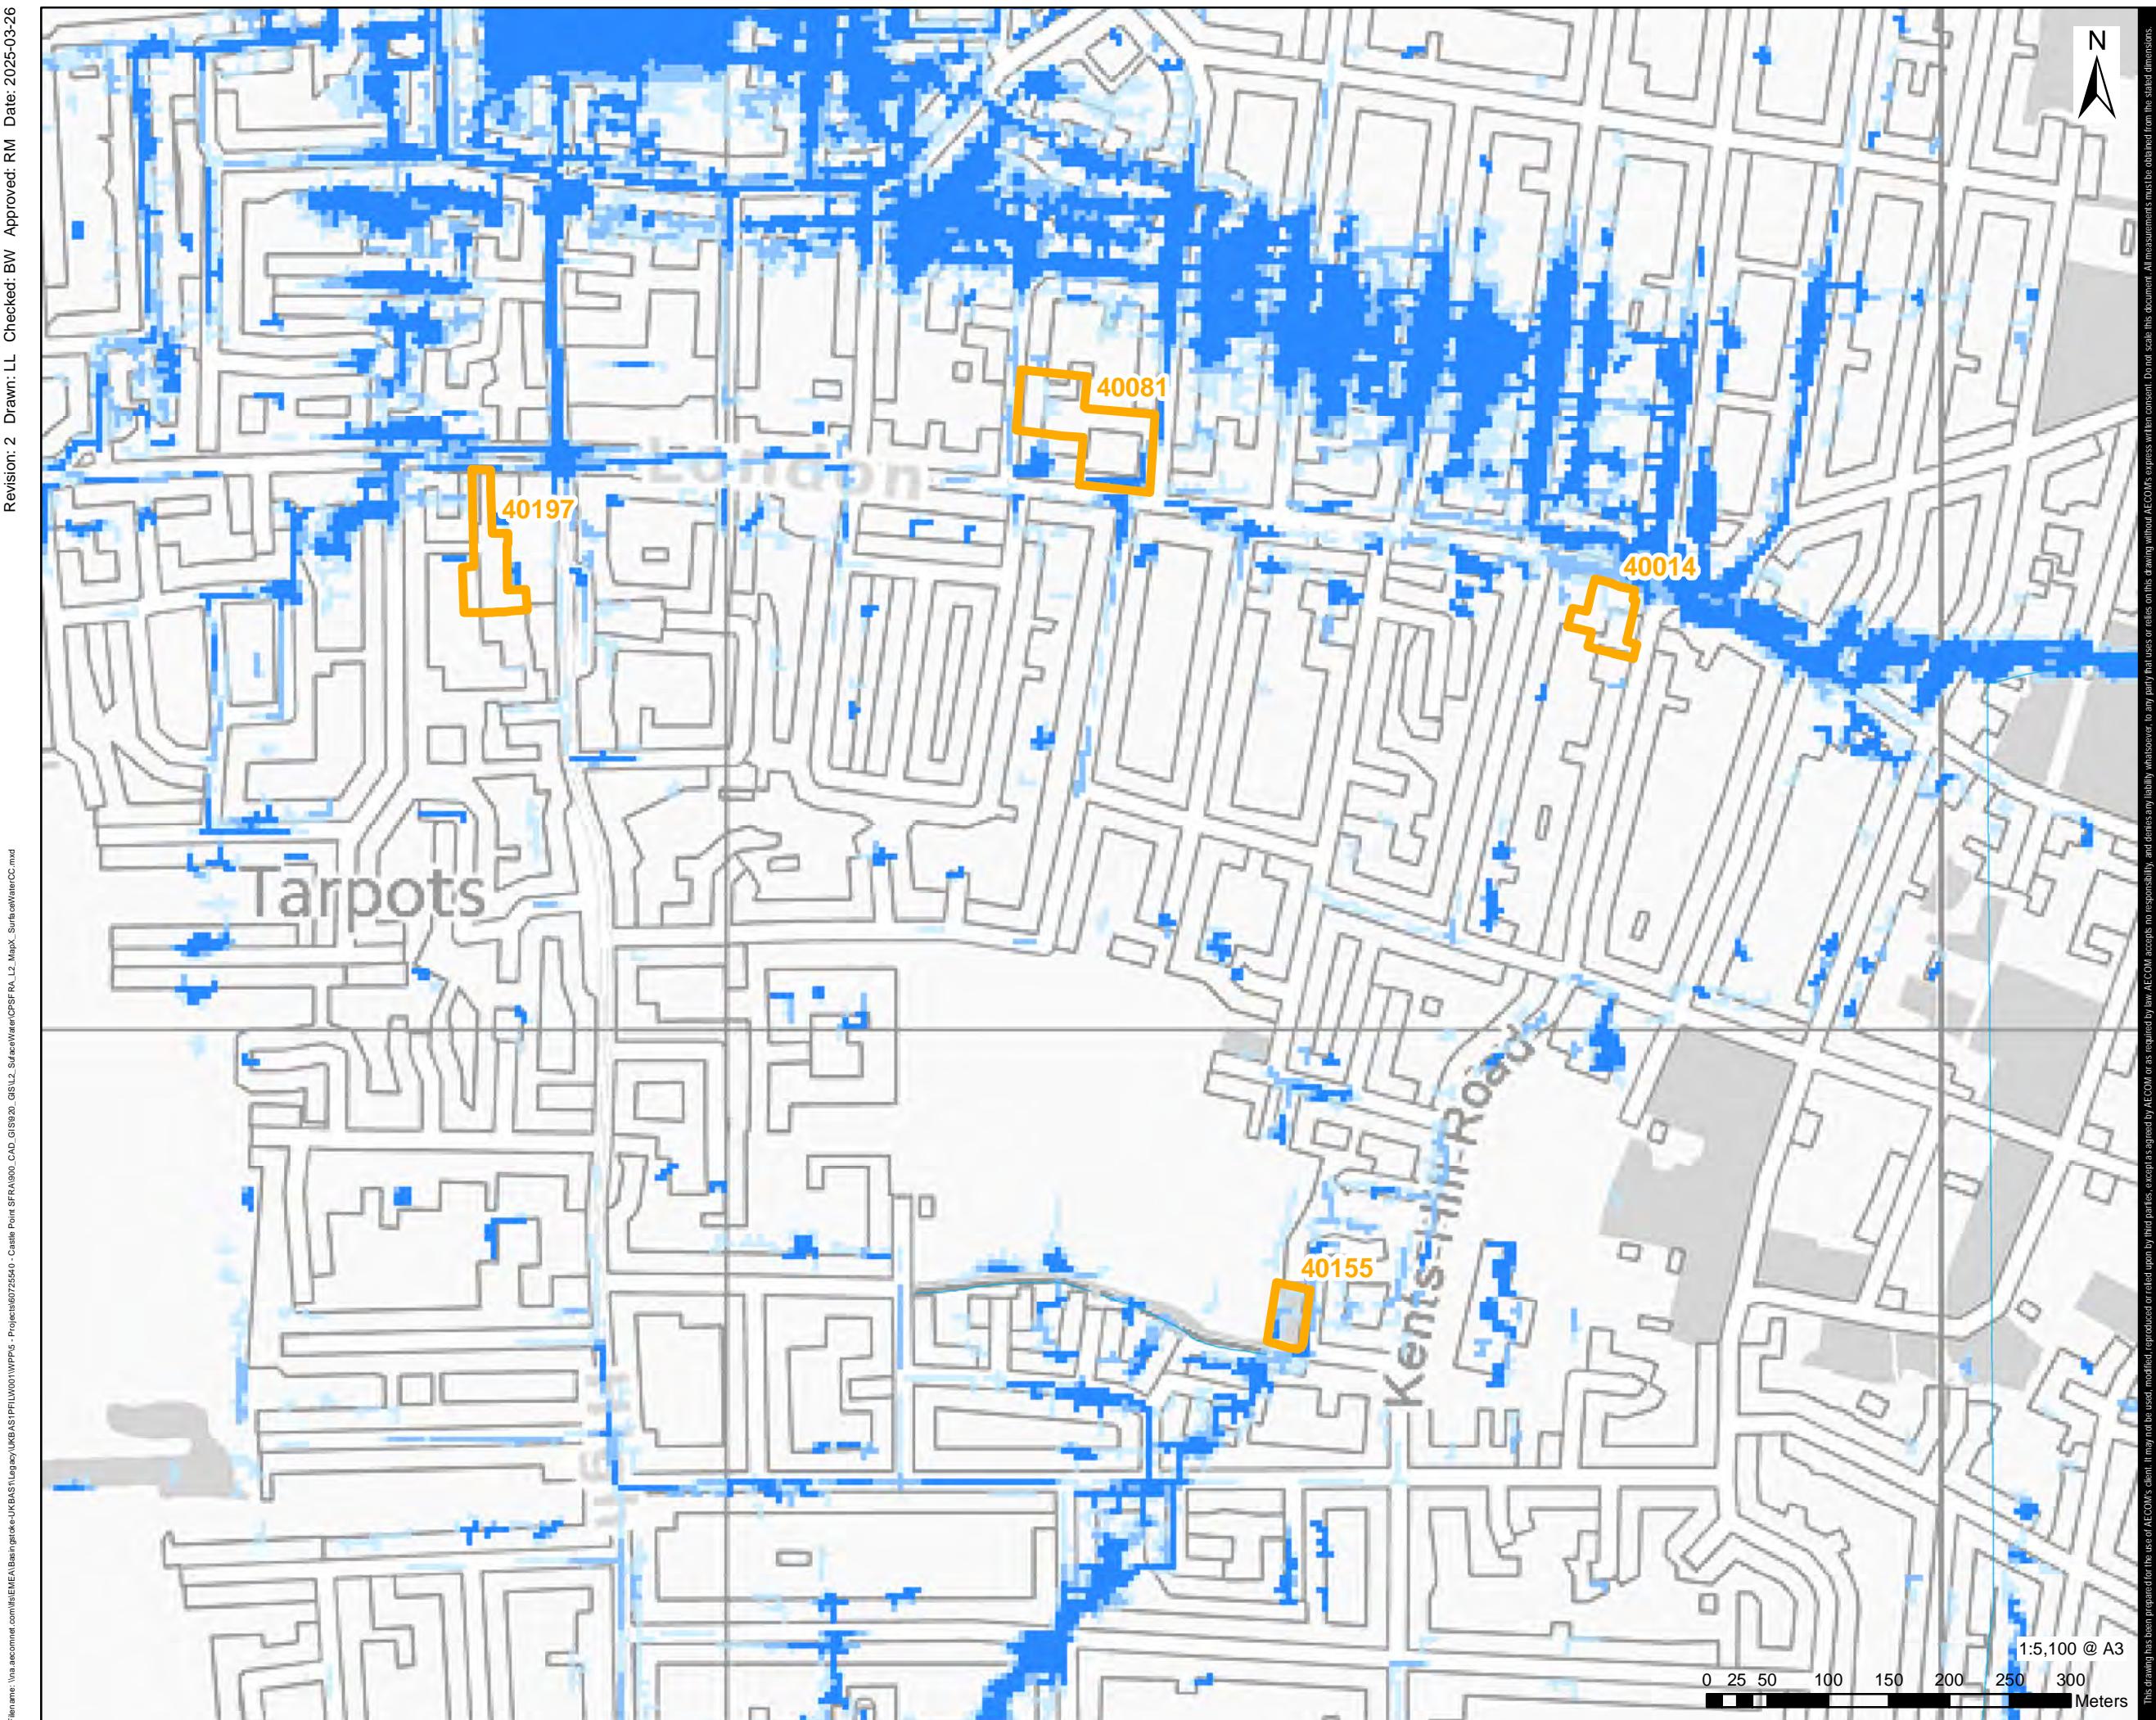

AECOM

**PROJECT**  
Castle Point Borough Council  
Level 2 Strategic Flood Risk Assessment

**CLIENT**  
Castle Point Borough Council

**CONSULTANT**  
AECOM Limited

Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
www.aecom.com


**LEGEND**

- Castle Point Borough Council
- EA Main River
- Watercourse

**Modelled Surface Water Flood Risk Extents**

3.3% AEP + 40% Climate Change  
1% AEP + 40% Climate Change  
0.1% AEP + 40% Climate Change

**EXTENT INDICATOR**



**NOTES**

- This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events including a 40% allowance for climate change. Refer to the SFRA report for details on the surface water modelling methodology, assumptions and limitations.
- This map displays results from the South Essex model.
- This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2023)

**ISSUE PURPOSE**

SFRA

**PROJECT NUMBER**


60725540

**MAP TITLE**

Modelled Surface Water Flood Risk - Climate Change Area B

**MAP NUMBER**

Appendix B Map 2B

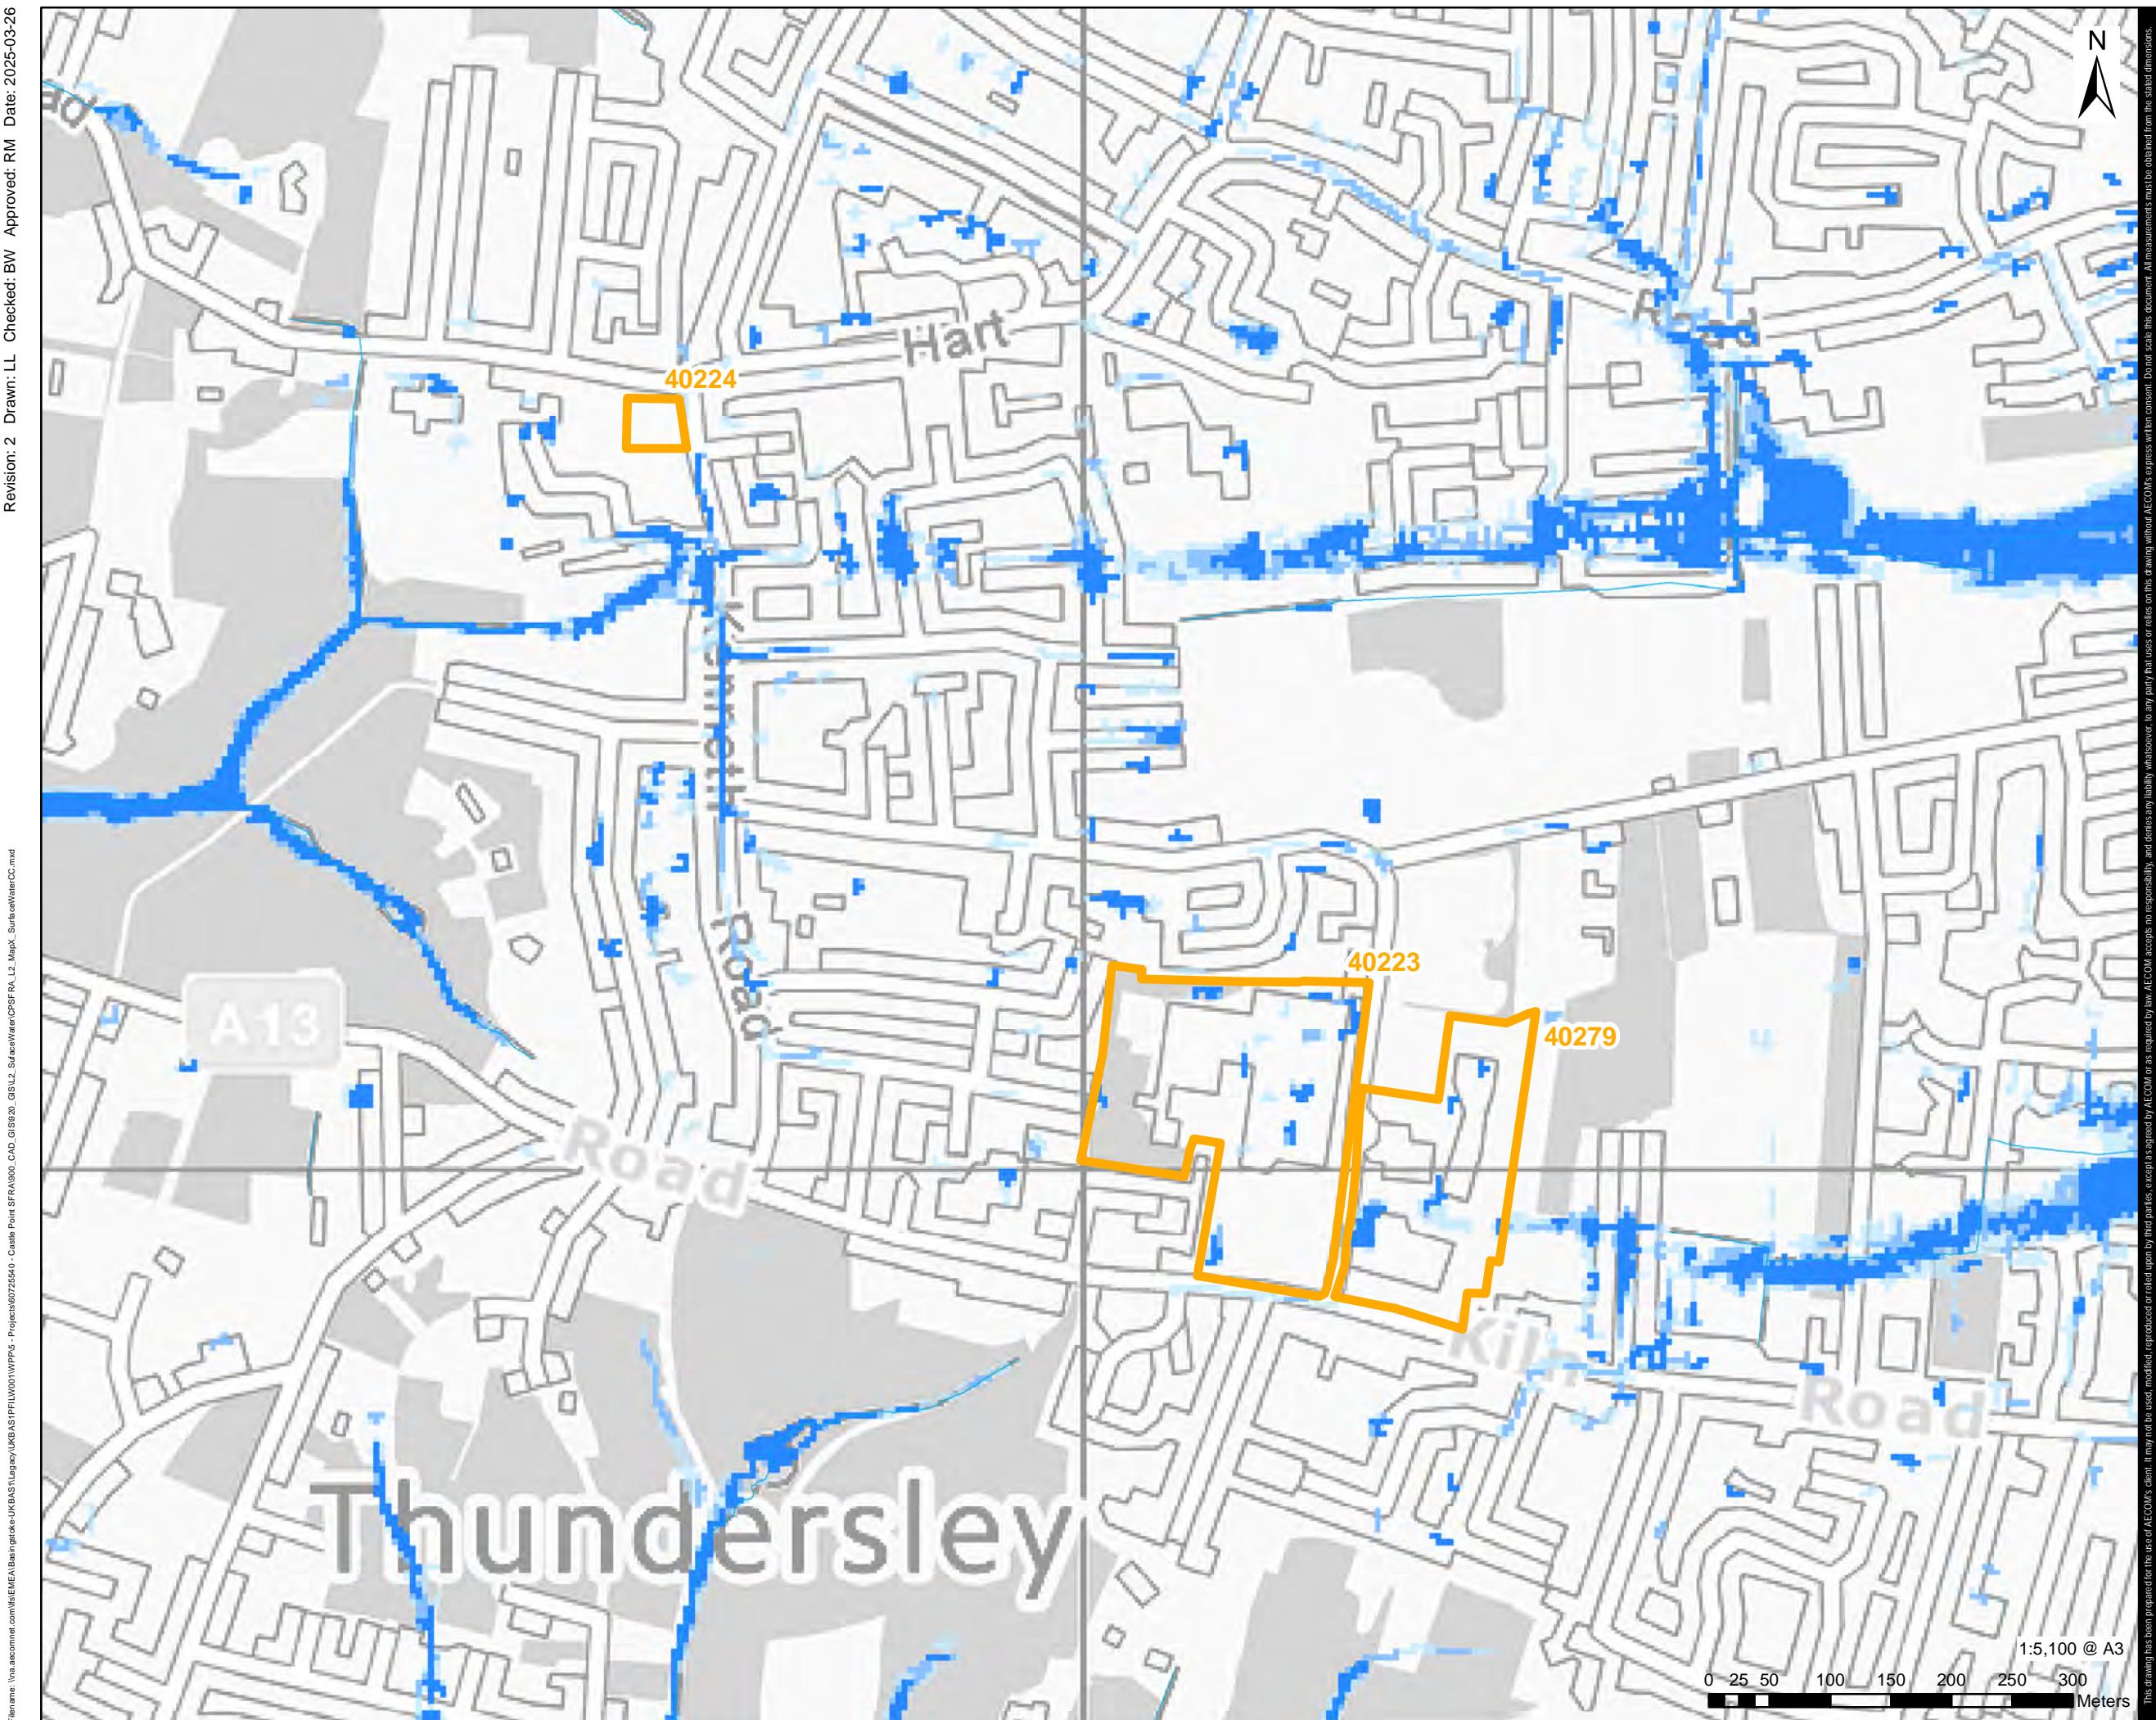

AECOM

**PROJECT**


Castle Point Borough Council  
Level 2 Strategic Flood Risk Assessment  
CLIENT

Castle Point Borough Council  
CONSULTANT

AECOM Limited  
Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
www.aecom.com

**LEGEND**

- Castle Point Borough Council
- EA Main River
- Watercourse
- Modelled Surface Water Flood Risk Extents**
  - 3.3% AEP + 40% Climate Change
  - 1% AEP + 40% Climate Change
  - 0.1% AEP + 40% Climate Change

**EXTENT INDICATOR****NOTES**

- This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events including a 40% allowance for climate change. Refer to the SFRA report for details on the surface water modelling methodology, assumptions and limitations.
- This map displays results from the South Essex model.
- This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2023)

**ISSUE PURPOSE**

SFRA

**PROJECT NUMBER**


60725540

**MAP TITLE**

Modelled Surface Water Flood Risk -  
Climate Change Area C

**MAP NUMBER**

Appendix B Map 2C

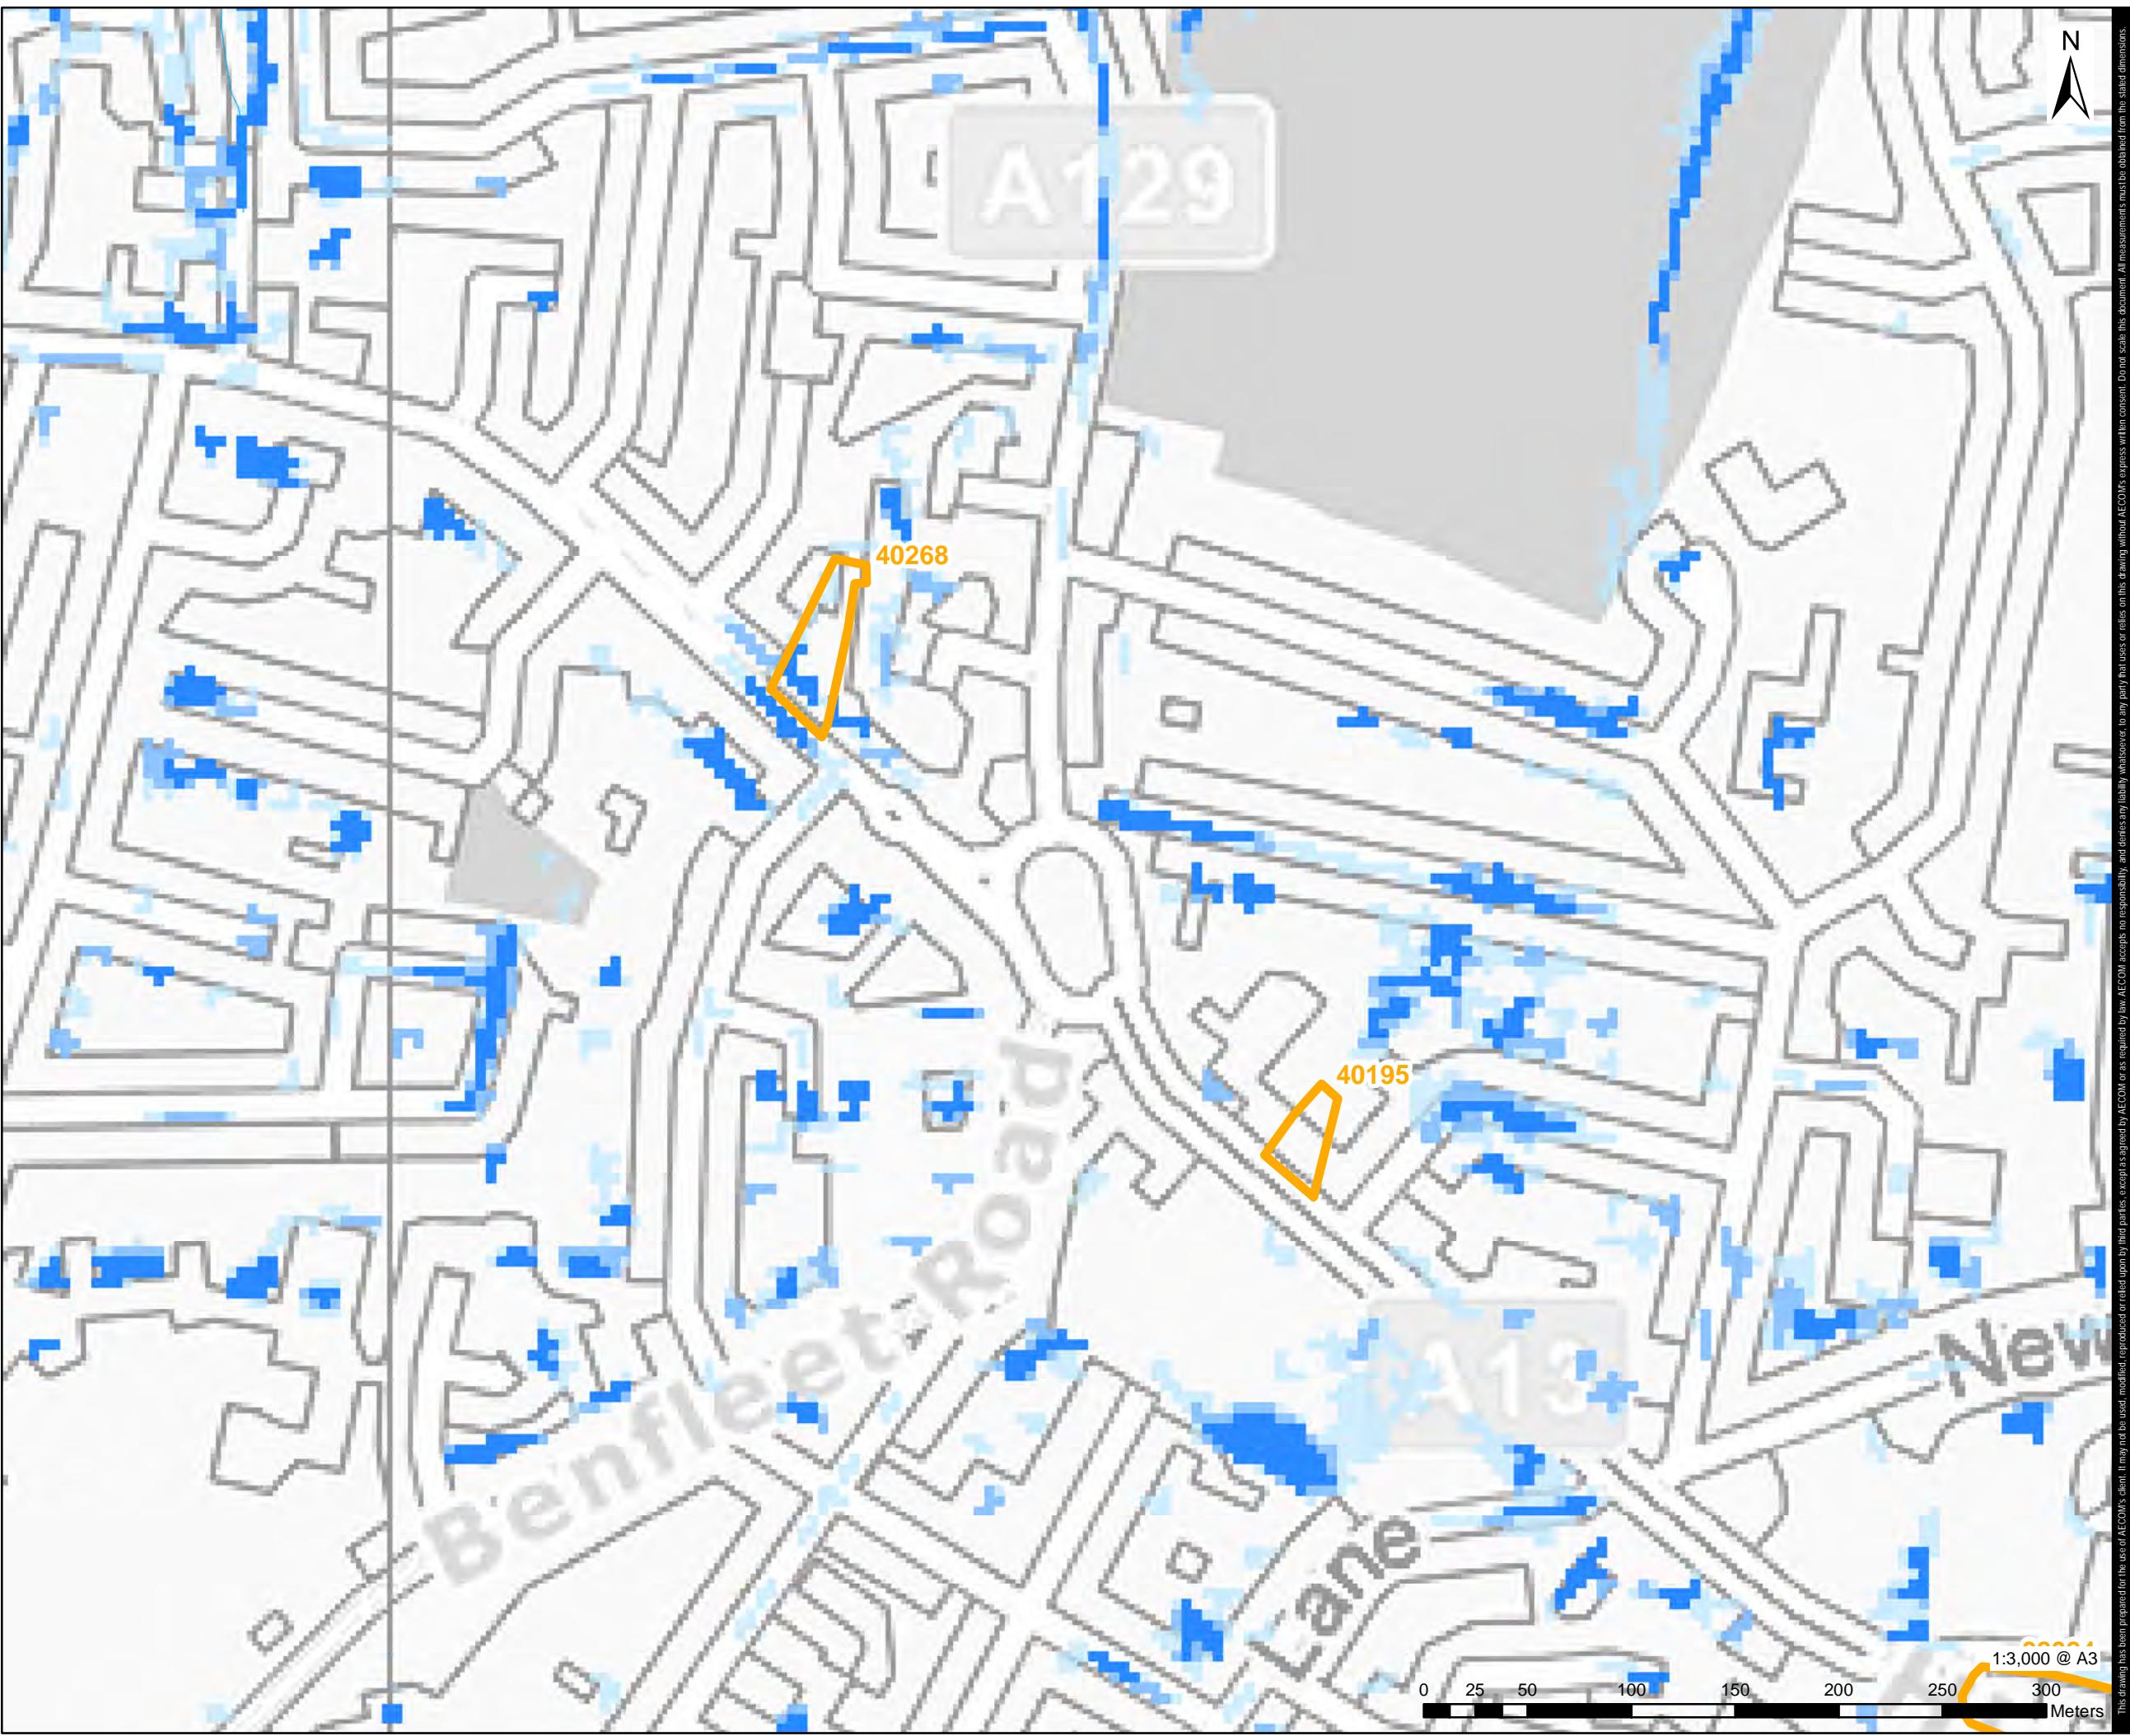

## PROJECT

Castle Point Borough Council  
Level 2 Strategic Flood Risk  
Assessment  
CLIENT

Castle Point Borough Council

**CONSULTANT**  
AECOM Limited  
Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
[www.aecom.com](http://www.aecom.com)


## LEGEND

- Castle Point Borough Council
  - EA Main River
  - Watercourse

### Modelled Surface Water Flood Risk Extents

  - 3.3% AEP + 40% Climate Change
  - 1% AEP + 40% Climate Change
  - 0.1% AEP + 40% Climate Change

## EXTENT INDICATOR



## NOTES

- 1: This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events including a 40% allowance for climate change. Refer to the SFRA report for details on the surface water modelling methodology, assumptions and limitations.
  - 2: This map displays results from the South Essex model.
  - 3: This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2022).

### ISSUE PURPOSE

SEPA

**PROJECT NUMBER**


60725540

### MAP TITLE

Modelled Surface Water Flood Risk -  
Climate Change Area D

**MAP NUMBER**

**APPENDIX B**

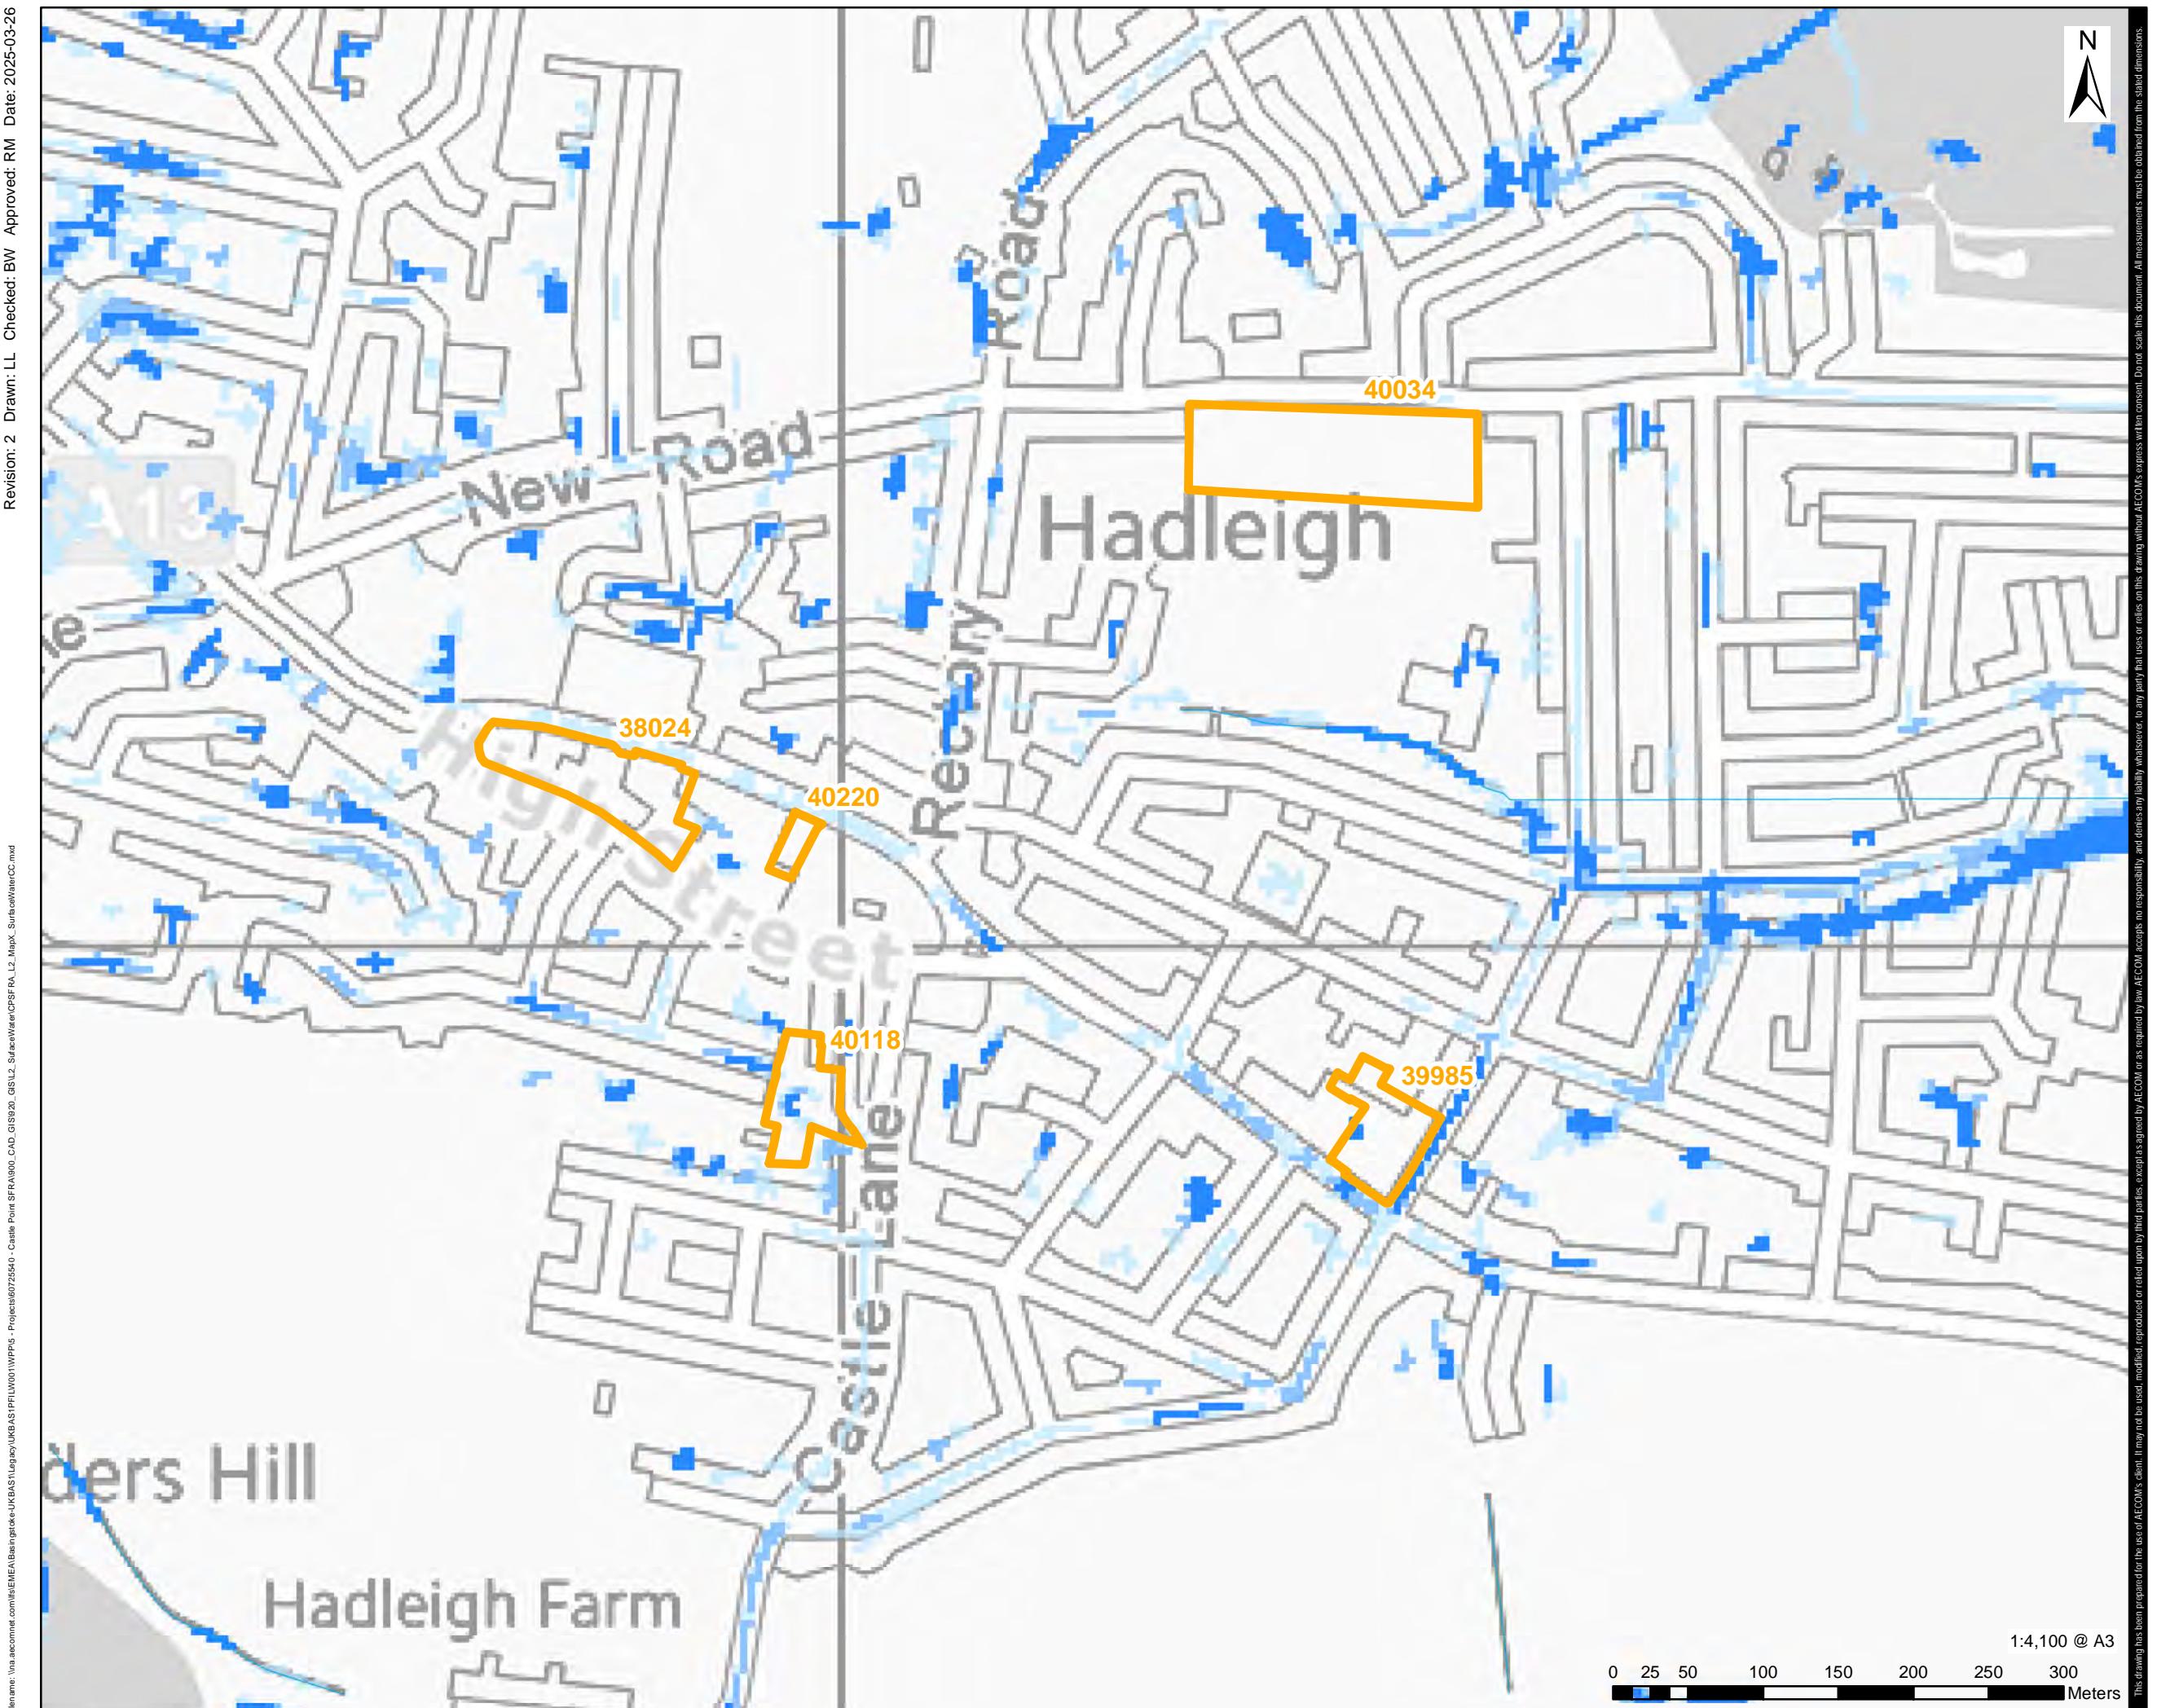

**AECOM**

**PROJECT**  
Castle Point Borough Council  
Level 2 Strategic Flood Risk Assessment

**CLIENT**  
Castle Point Borough Council

**CONSULTANT**  
AECOM Limited  
Midpoint, Alencon Link,  
Basingstoke, Hampshire  
RG21 7PP  
www.aecom.com

**LEGEND**

- Castle Point Borough Council
- EA Main River
- Watercourse

**Modelled Surface Water Flood Risk Extents**

- 3.3% AEP + 40% Climate Change
- 1% AEP + 40% Climate Change
- 0.1% AEP + 40% Climate Change

**EXTENT INDICATOR**

**NOTES**

- This map shows the predicted likelihood of surface water flooding based on modelling undertaken by AECOM for the 3.3%, 1% and 0.1% annual exceedance probability (AEP) events including a 40% allowance for climate change. Refer to the SFRA report for details on the surface water modelling methodology, assumptions and limitations.
- This map displays results from the South Essex model.
- This map is intended to provide a strategic overview of surface water flood risk and should not be used to assess the flood risk for individual properties.

© Environment Agency copyright and/or database right.  
Contains OS data © Crown copyright and database right (2023)

**ISSUE PURPOSE**  
SFRA

**PROJECT NUMBER**  
60725540

**MAP TITLE**  
Modelled Surface Water Flood Risk - Climate Change Area E

**MAP NUMBER**  
Appendix B Map 2E

This drawing has been prepared for the use of AECOM's client. It may not be used, modified, reproduced or relied upon by third parties, except as agreed by AECOM or as required by law. AECOM accepts no responsibility and denies any liability whatsoever, to any party that uses or relies on this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

